

VEHICLE RECOVERY WINCH EW-6500



EW-6500

Rated Line Pull: 6500 lbs. (2950kgs) Single-Line

Motor: 5.5HP Series-Wound

Control: Remote Switch, 12'(3.7m) lead

Gear Train: 3-Stage Planetary

Gear Ratio: 172.8:1

Clutch: Shift Pin Ring Gear

Brake: Automatic In-The-Drum

Drum Size: Diameter 2.5" (63.5mm) Length 5.35" (135mm)

Wire Rope: 80', 9/32" Diameter (24m, 7.2mm Diameter)

Fairlead: Hawse Fairlead

Remote Control: Included

Recommended Battery: 650CCA Minimum for Winching


Battery Leads: 25mm², 72" (1.83m)

Finish: Black

Weight: 66 lbs. (30kg)

Overall Dimensions: (L x W x H) 18.5" x 6.3" x 8.1" (470 x 160 x 205mm)

Mounting Bolt Pattern: 6.55" ± 0.015" x 4.50" ± 0.010" (166.4mm x 113.3mm)

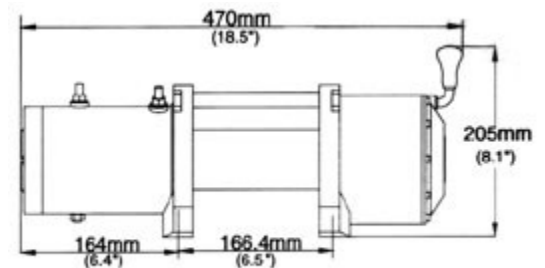

(L x W x H) 18.5" x 6.3" x 8.1"

Line Speed & Amp Draw-First Layer

Line	lbs	No	1500	3000	4500	6000	6500	
Pull	kgs	Load	680	1360	2040	2720	2950	
Line	fpm	12V	37.7	19.7	16.4	11.8	9.1	8.2
Speed	Mpm	12V	11.5	6	5	3.6	2.8	2.5
Motor Current	Amps	12V	90	180	340	340	390	430

Line Pull & Cable Capacity

Layer of Cable		1	2	3	4	5
Rated Line Pull	lbs	6500	5400	4620	4000	3580
Pull Per Layer	kgs	2950	2450	2090	1820	1620
Cumulative	ft.	14	30	48	69	80
Cable Capacity	m	4	9	14	21	24

Exclusive North American Distributor
T-Max, LLC
P.O. Box 4544 - Elkhart, IN 46514-0544



National Association of Testing Authorities, Australia

