





MS05 - MSE05

HYDRAULIC MOTORS

T E C H N I C A L C A T A L O G

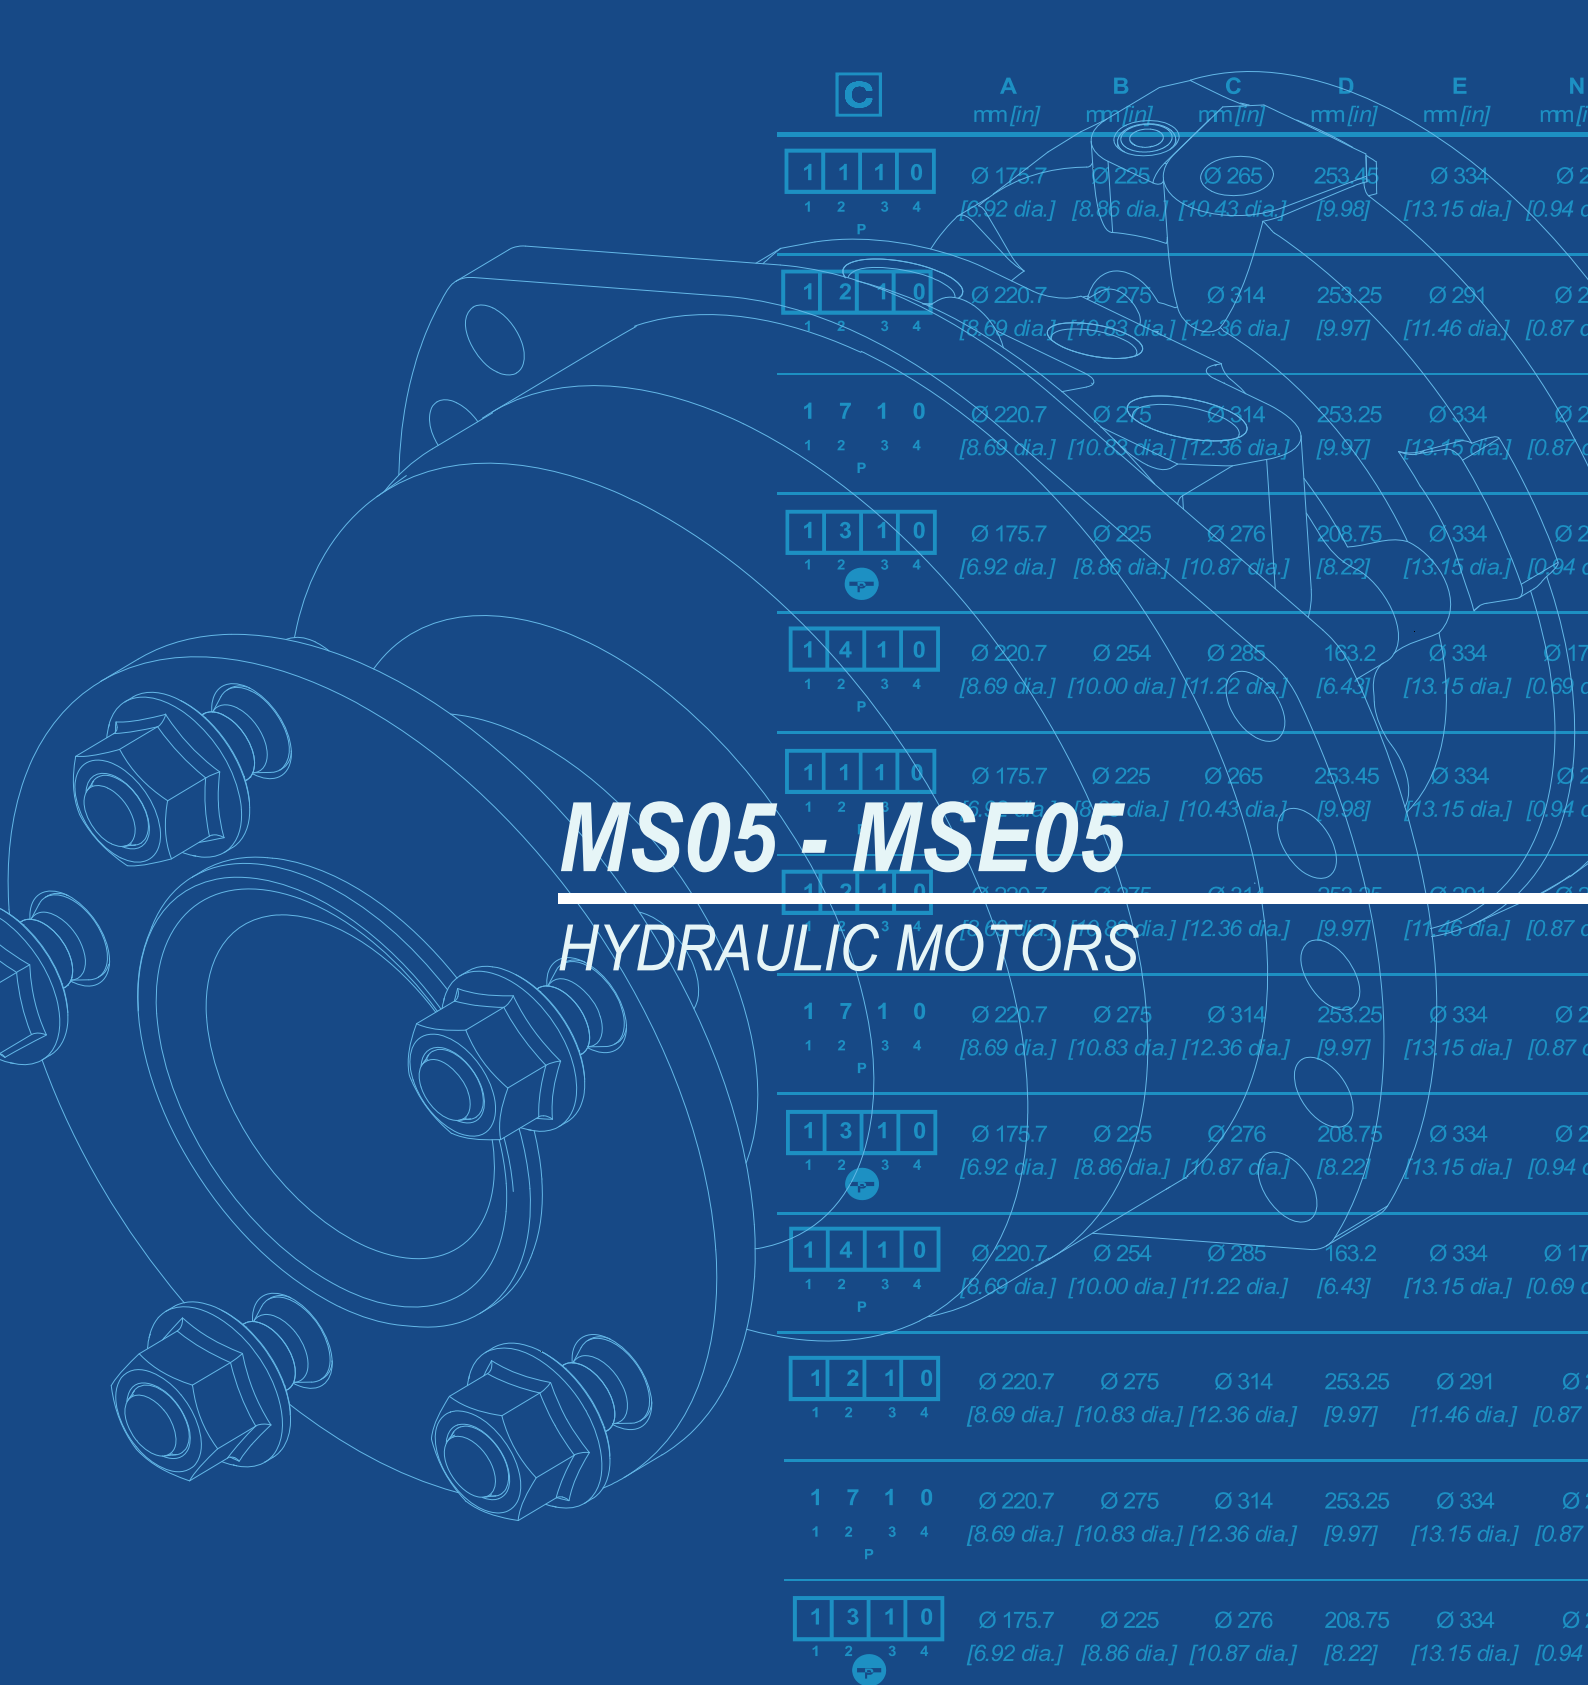

CHARACTERISTICS

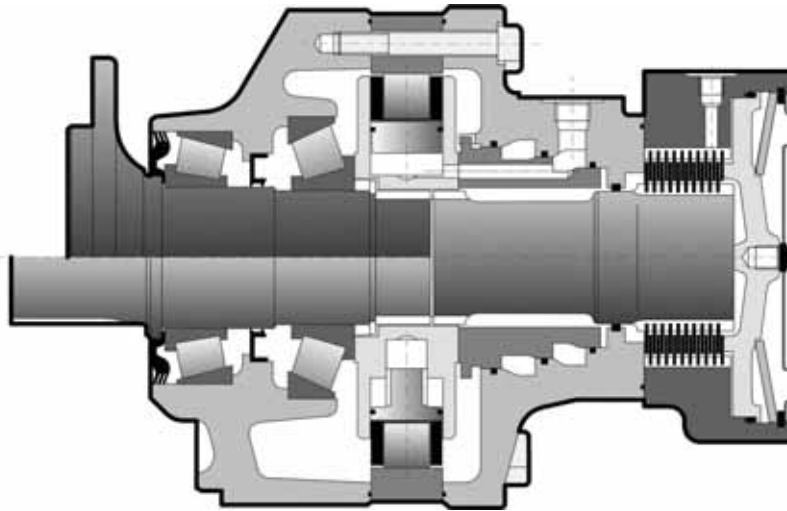

Motor inertia = 0.03 kg.m²
Noise emissions = 60 dBA

				Theoretical torque			Max.power		Max. speed		Max. pressure
											
		cm³/tr [cu.in/rev.]	cm³/tr [cu.in/rev.]	at 100 bar Nm	at 1000 PSI [lb.ft]		kW [HP]	preferred kW [HP]	non-preferred kW [HP]	tr/min	
Cams with equal lobes	MS05	6	260 [15,9]	130 [7,9]	413 [210]	29 [39]	19 [25]	15 [20]		265	450 [6 527]
		8	376 [22,9]	188 [11,5]	598 [304]					250	
		0	468 [28,5]	234 [14,3]	744 [378]					240	
		1	514 [31,3]	257 [15,7]	817 [416]					220	
		2	560 [34,2]	280 [17,1]	890 [453]					200	
	MSE05	8	530 [32,3]	265 [16,2]	843 [429]	29 [39]	19 [25]	15 [20]		200	400 [5 802]
		0	625 [38,1]	312,5 [19,1]	994 [505]					190	
		1	688 [42,0]	344 [21,0]	1094 [556]					175	
		2	750 [45,7]	375 [22,9]	1193 [606]					160	
		3	820 [50,0]	410 [25,0]	1304 [663]					145	
Cams with unequal lobes	MS05	D	419 [25,6]	 280 [17,1] 138 [8,4]	666 [339]	29 [39]	19 [25]	15 [20]		200	450 [6 527]
		N	422 [25,7]	 234 [14,3] 188 [11,5]	671 [341]					240	
		H	445 [27,1]	 257 [15,7] 188 [11,5]	708 [360]					220	
		A	468 [28,5]	 280 [17,1] 188 [11,5]	744 [378]					200	
	MSE05	D	560 [34,2]	 374 [22,8] 185 [11,3]	890 [453]	29 [39]	19 [25]	15 [20]		160	400 [5 802]
		N	564 [34,4]	 313 [19,1] 251 [15,3]	897 [456]					190	
		H	595 [36,3]	 344 [21,0] 251 [15,3]	946 [481]					175	
		A	625 [38,1]	 374 [22,8] 251 [15,3]	994 [505]					160	




❶ First displacement

❷ Second displacement

* See option "M" for higher speed.




CONTENT

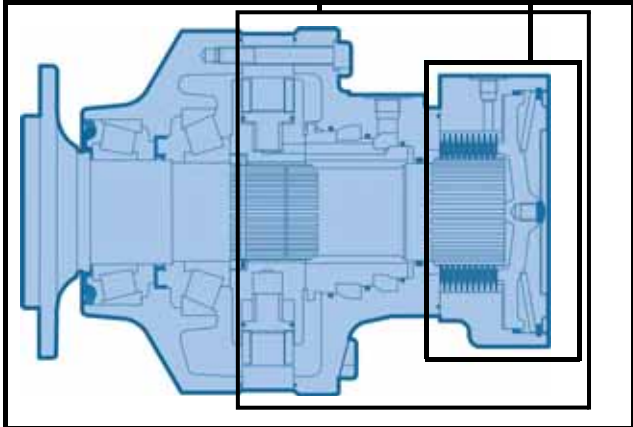	MODULARITY	4	Modularity and Model code
	MODEL CODE	6	
	WHEEL MOTOR	8	Wheel motor
	Dimensions for standard (1210) 1-displacement motor	8	
	Dimensions for standard (1210) 2-displacement motor	9	
	Dimensions for standard (1210) Twin-Lock™	9	
	Support types	10	
	Studs	10	
	Load curves	11	
	SHAFT MOTOR	13	Shaft motor
	Dimensions for standard (2A50) 1-displacement motor	13	
	Dimensions for standard (2A50) 2-displacement motor	13	
	Support types	14	
	Splined coupling	14	
	Load curves	15	
	VALVING SYSTEMS AND HYDROBASES	17	Valving systems and hydrobases
	Dimensions for 1-displacement valving	17	
	Cylinder block splines	17	
	Dimensions for other valving systems	18	
	Exchange	20	
	Chassis mountings	21	
	Hydraulic connections	22	
	Efficiency	23	
	BRAKES	25	Brake
	Rear brake	25	
	Drum brake (250 x 60)	26	
	OPTIONS	27	Options




MODUL

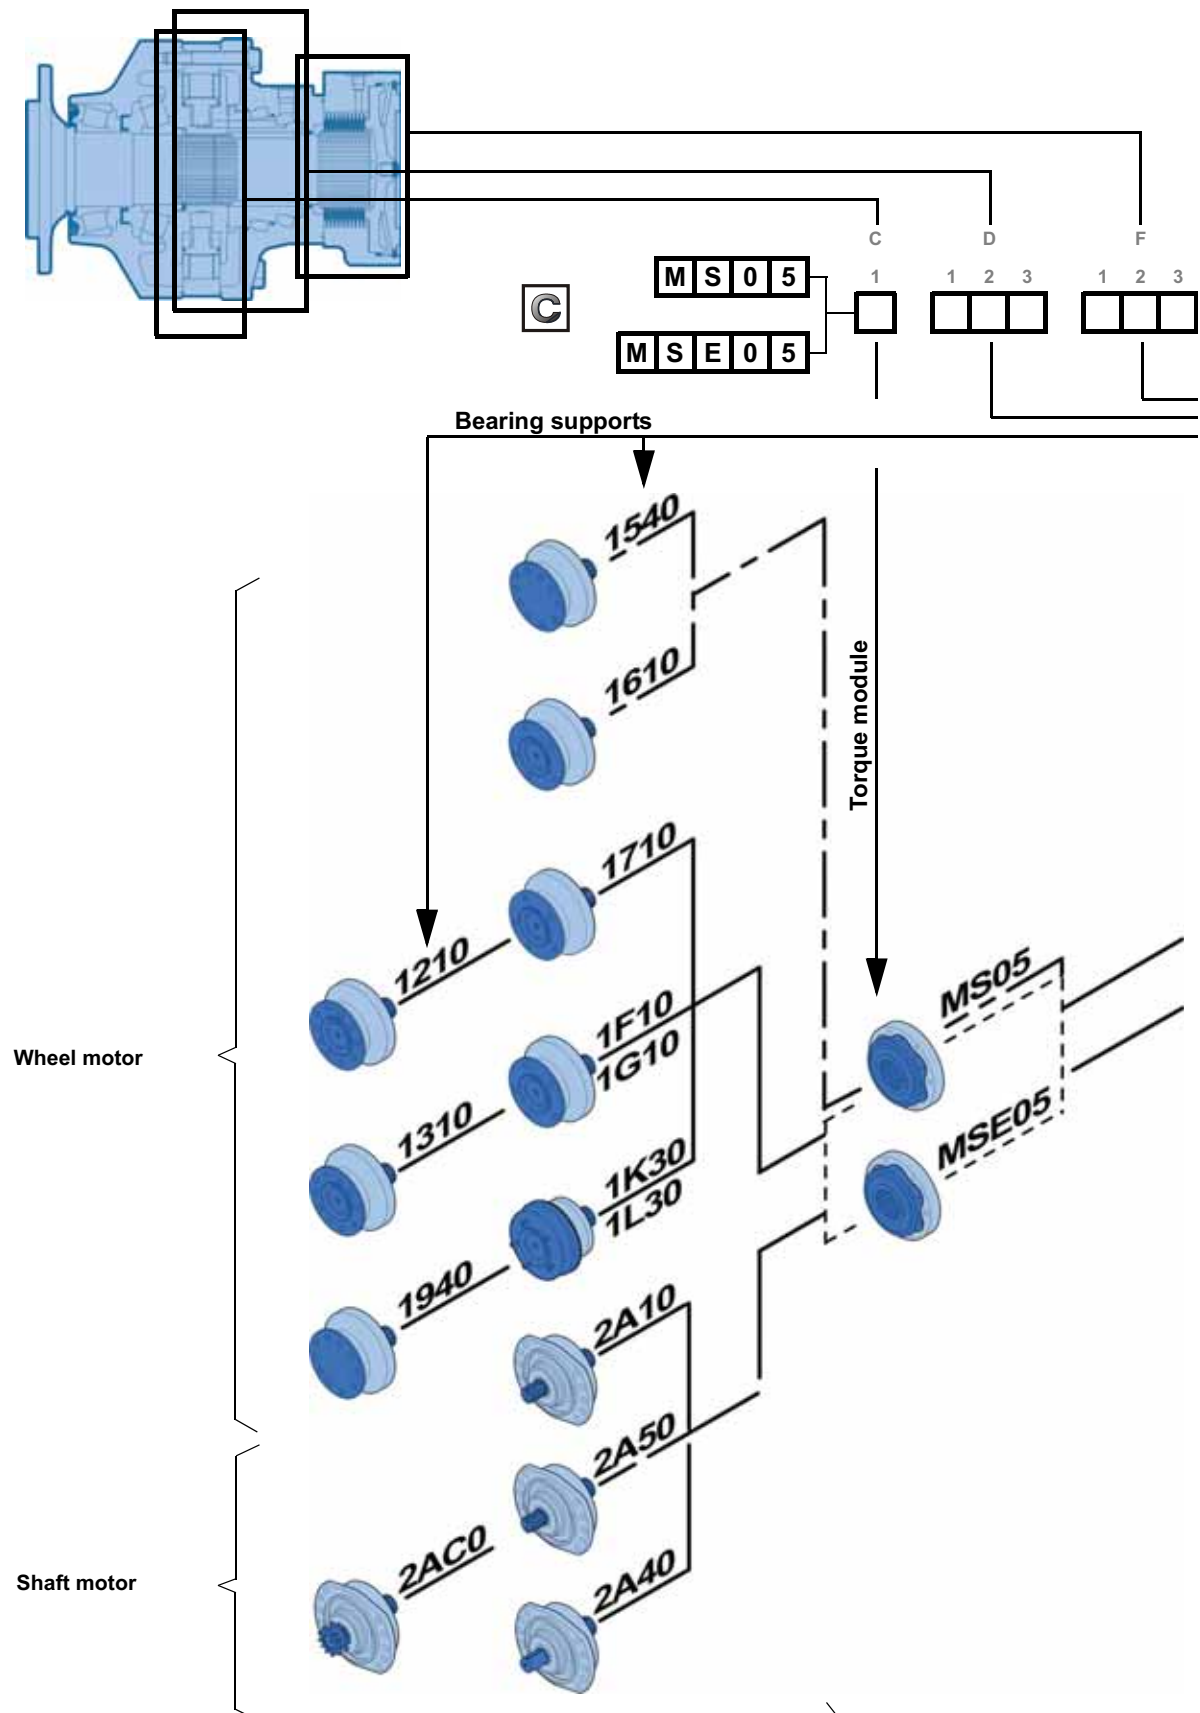



ARITY

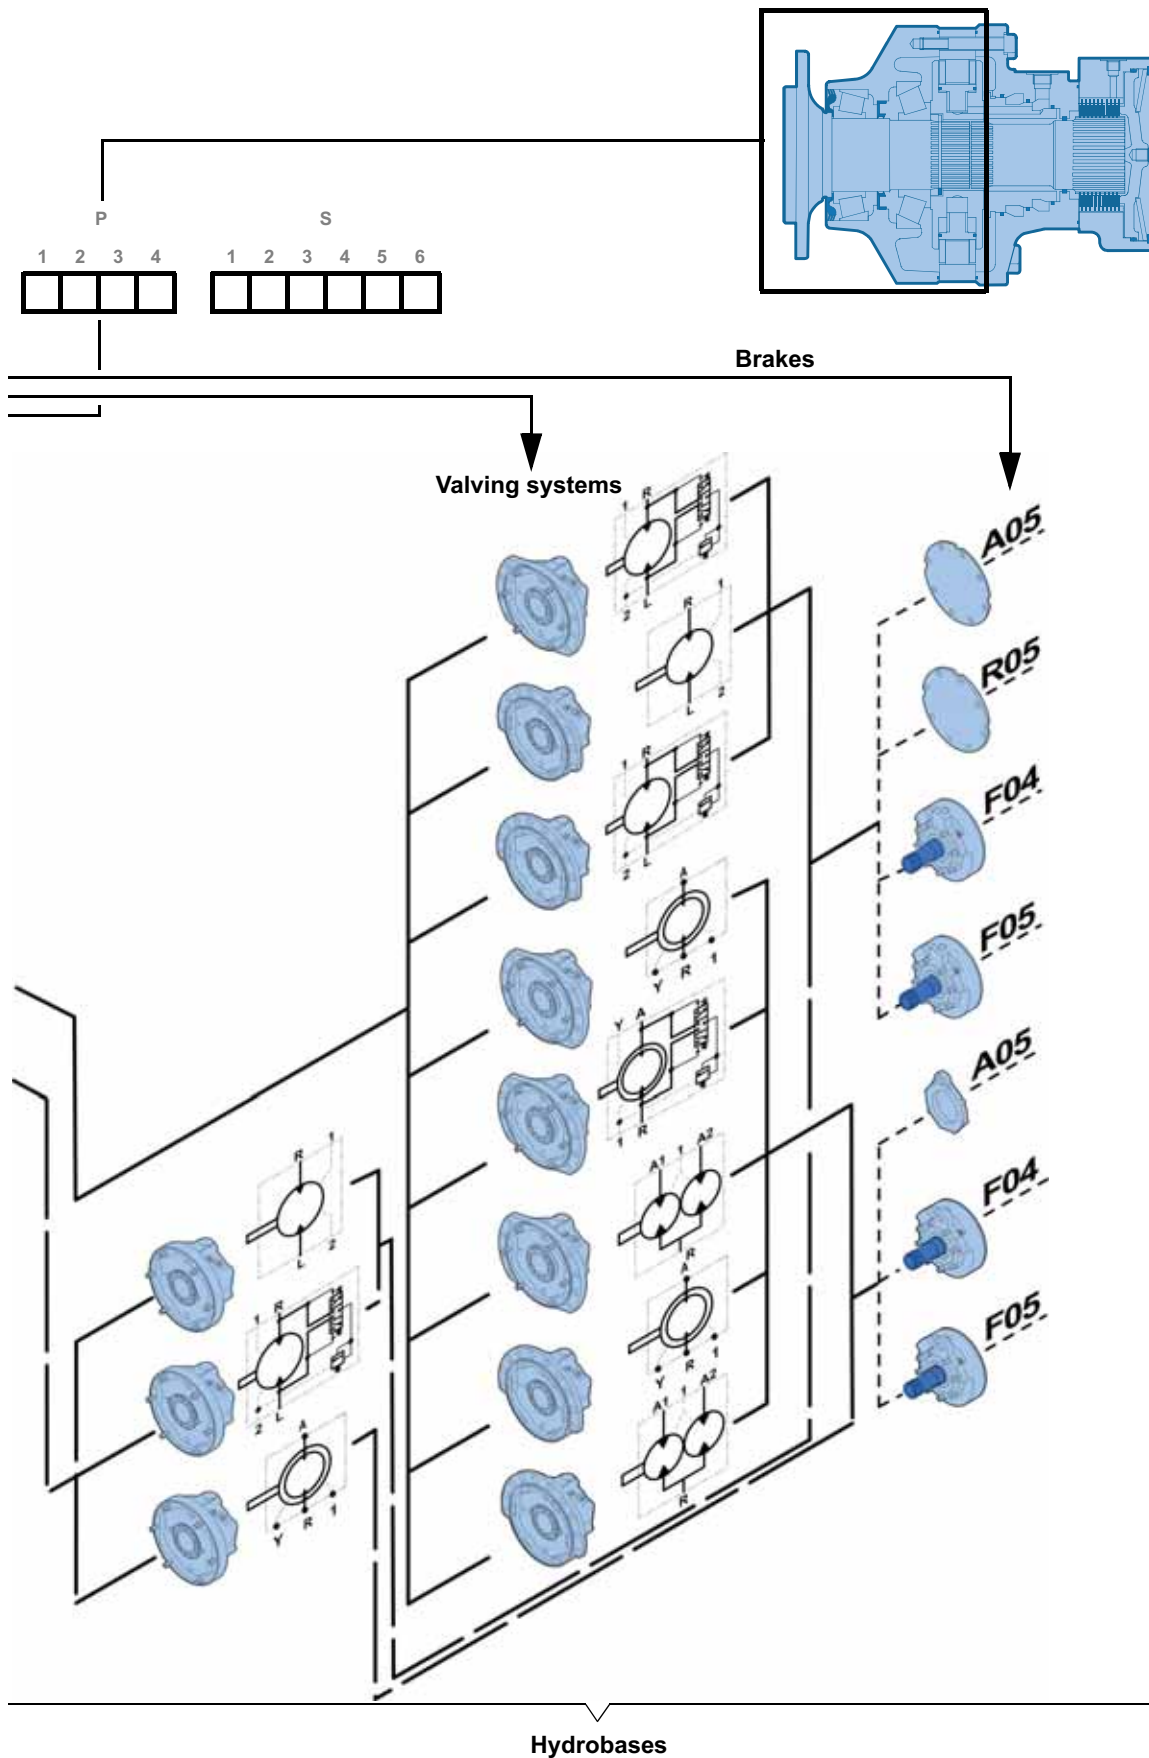

Modularity and
Model code

Wheel motor

Shaft motor


Valving systems
and hydrobases

Brake

Options



MODEL

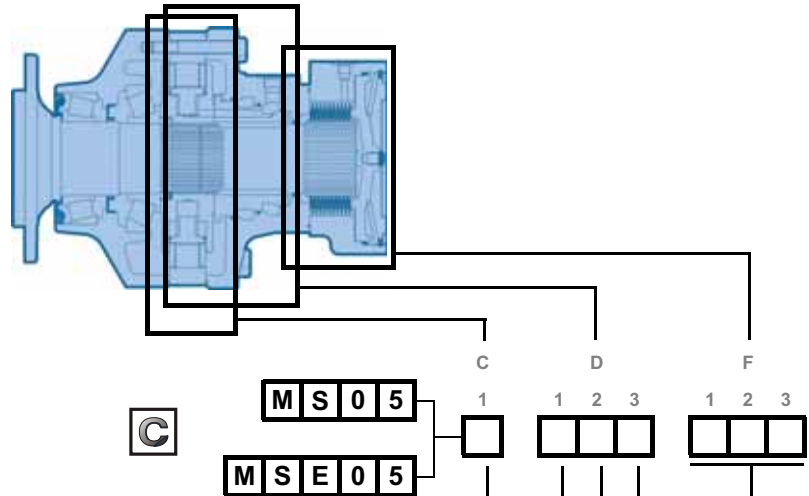

		①	②
		cm³/tr [cu.in/rev.]	cm³/tr [cu.in/rev.]
Cams with equal lobes	MS05	6	260 [15,9]
		8	376 [22,9]
		0	468 [28,5]
		1	514 [31,3]
		2	560 [34,2]
	MSE05	8	530 [32,3]
		0	625 [38,1]
		1	688 [42,0]
		2	750 [45,7]
		3	820 [50,0]

Cams with unequal lobes	MS05	D	419 [25,6]	280 [17,1]
		N	422 [25,7]	234 [14,3]
		H	445 [27,1]	257 [15,7]
		A	468 [28,5]	280 [17,1]
		D	560 [34,2]	374 [22,8]
	MSE05	N	564 [34,4]	313 [19,1]
		H	595 [36,3]	344 [21,0]
		A	625 [38,1]	374 [22,8]
				251 [15,3]
				251 [15,3]

- ① First displacement
② Dual displacement

1-displacement valving	1
2-displacement & Twin-Lock™ valving (Clockwise)	D Ratio 2 E Ratio <2 F Ratio >2
2-displacement & Twin-Lock™ valving (Counterclockwise)	G Ratio 2 H Ratio <2 J Ratio >2


Without mounting	1	4	-
Lug fixing	2	-	E
Horseshoe fixing	3	6	F
	1 Displacement	Exchange	Twin-Lock™
	2 Displacement		

ISO 11926-1 connection	A
ISO 1179-1 connection	3
ISO 9974-1 connection	4
ISO 6149-1 connection	8

Without brake (simple plate)	A 0 5
Brake	F 0 4
Without brake (reinforced plate)	R 0 5



CODE

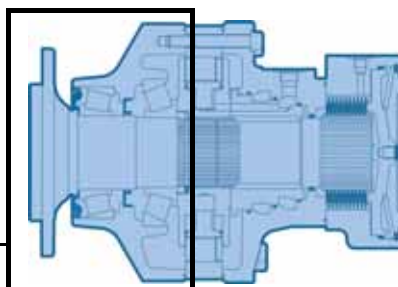

0	Without bearing support
1	Without mounting
2	Lug mounting

Without shaft	0
10 x Ø18 on Ø140	2
5+3 x Ø18 on Ø140	3
10 x M12 on Ø100	5
5 x Ø18 on Ø140	6
6 x Ø20 on Ø205	7
10 x M12 on Ø100	9
Support without drum brake	F
	G
Drum brake (250 x 60)	K
	L
For male shaft bearing support	A

Without studs	1
With studs + nuts	2
With studs	3
M threaded holes	4

Male shafts

NF E 22141 splines	1
Cylindrical with key	4
DIN 5480 splines	5
Dual sprocket for chain	C

Drum brake (250 x 60)

Without cable	7	10 x M14 on Ø140
Right-hand cable outlet	8	
Left-hand cable outlet	9	
Without cable	A	6 x M18 on Ø205
Right-hand cable outlet	B	
Left-hand cable outlet	C	

Without Options or Adaptations	0
Fluorinated elastomer seals	1
T4 Speed sensor installed	2
Brake environmental cover without plug	3
Drainage	5
Industrial bearing support	6
Diamond™	7
Predisposition for speed sensor	8
Hollow shaft	A
Drain on the bearing support	B
Abrasive environment	C
Special paint or no paint	D
Reinforced sealing	E
Special wheel rim mounting	G
High efficiency	H
Surface heat treatment of the shaft	J
High speed	M
TR Speed sensor installed	S
Soft Shift™	T

Modularity and
Model code

Wheel motor

Shaft motor

Valving systems
and hydrobases

Brake

Options

**Methodology :**

This document is intended for manufacturers of machines that incorporate Poclain Hydraulics products. It describes the technical characteristics of Poclain Hydraulics products and specifies installation conditions that will ensure optimum operation. This document includes important comments concerning safety. They are indicated in the following way:

**Safety comment.**

This document also includes essential operating instructions for the product and general information. These are indicated in the following way:





**Essential instructions.****General information .****Information on the model number.Information on the model code.****Weight of component without oil.****Volume of oil.****Units.****Tightening torque.****Screws.****Information intended for Poclain-Hydraulics personnel.**

The views in this document are created using metric standards.

The dimensional data is given in mm and in inches (inches are between brackets and italic>

**Dimensions for standard (1210) 1-displacement motor**



	40 kg [88 lb]	50 kg [110 lb]
	1,00 L [60 cu.in]	1,00 L [60 cu.in]

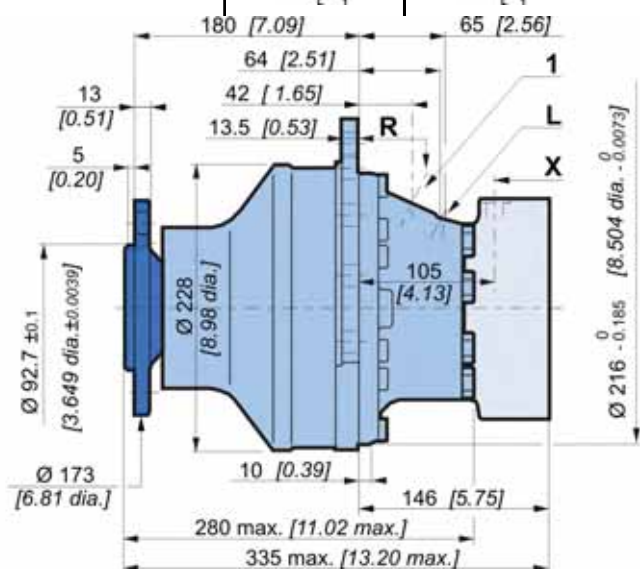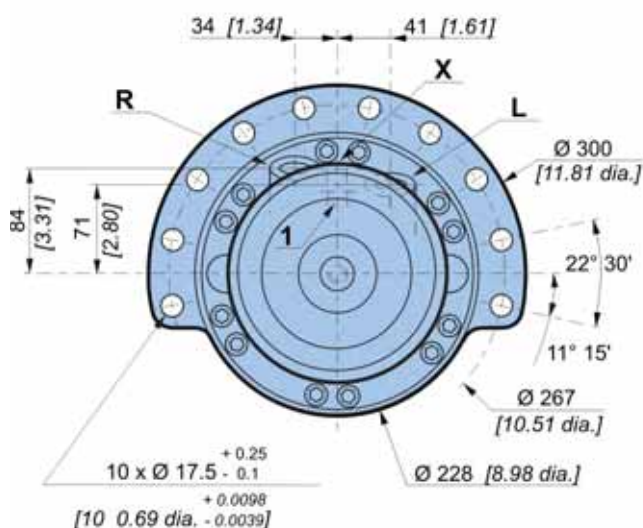





WHEEL MOTOR

Dimensions for standard (1210) 2-displacement motor

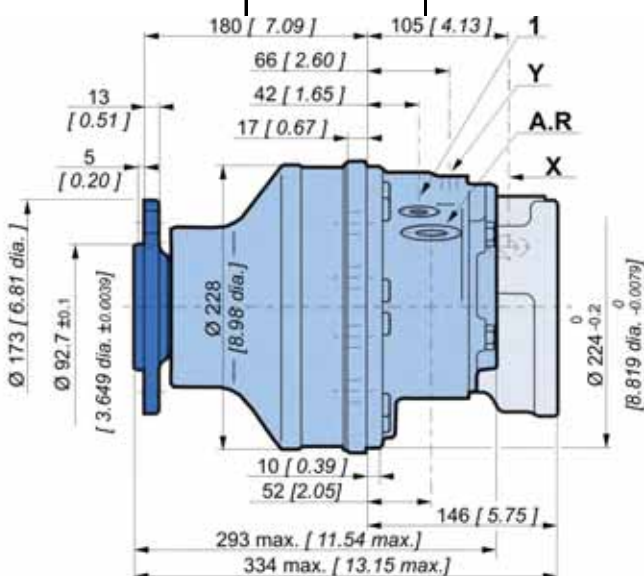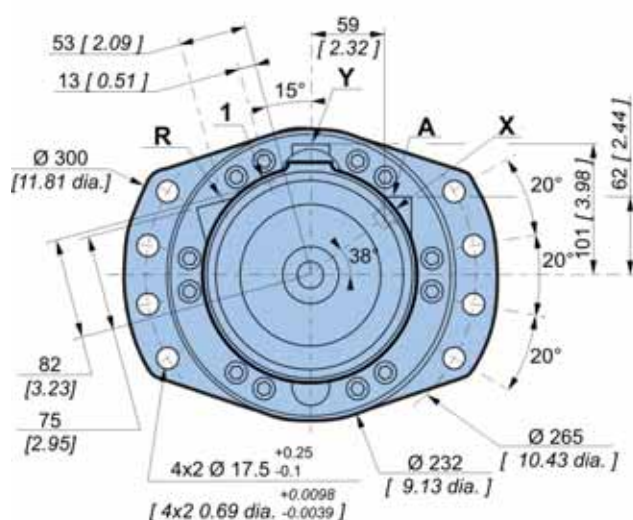

Dimensions for standard (1210) Twin-Lock™

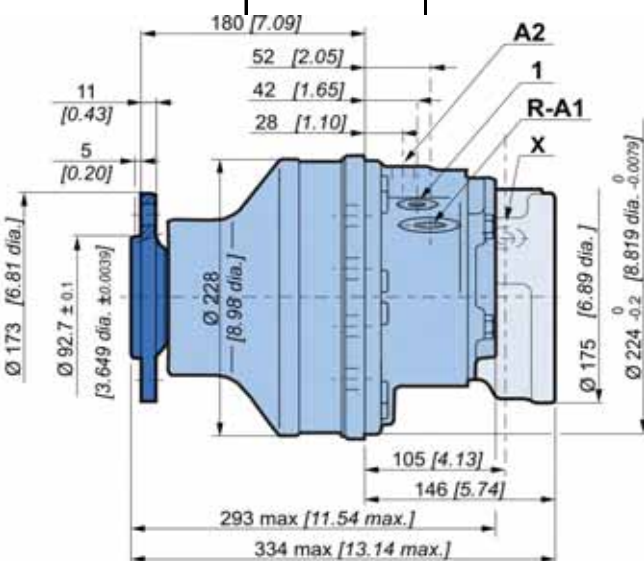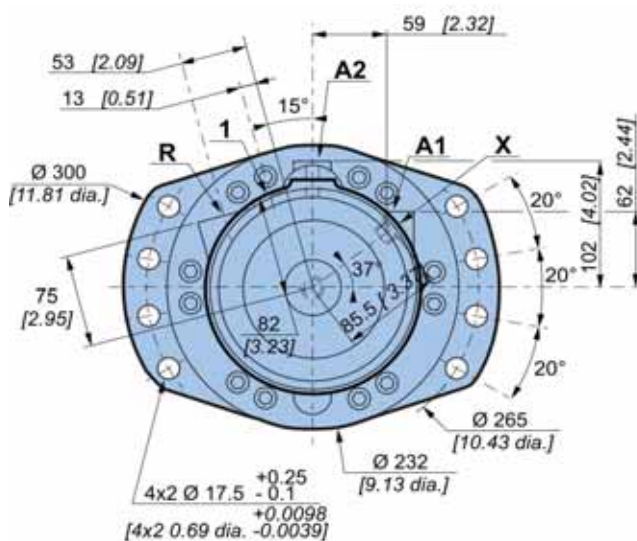

Also see 'Valving systems and hydrobases' section (thumbnail opposite).

Modularity and
Model code

Wheel motor

Shaft motor

Valving systems
and hydrobases

Brake

Options



Support types

				C			D			F				P				S					
				1	1 2 3			1 2 3			1 2 3 4				1 2 3 4 5 6								
				MS05																			
				MSE05																			
				A	B	C	D	E	N	Wheel rim mountings	L												
				mm [in]	mm [in]	mm [in]	mm [in]	mm [in]	mm [in]		mm [in]												
				Ø 92,7 [3,65 dia.]	Ø 140 [5,51 dia.]	Ø 170 [6,69 dia.]	178,6 [7,03]	Ø 228 [8,98 dia.]	Ø 18 [0,71 dia.]	10 x M14x1.5	11 [0,43]												
				Ø 160,7 [6,33 dia.]	Ø 205 [8,07 dia.]	Ø 245 [9,65 dia.]	178,5 [7,03]	Ø 228 [8,98 dia.]	Ø 20 [0,79 dia.]	6 x M18x1.5	14 [0,55]												
				Ø 95,7 [3,77 dia.]	Ø 140 [5,51 dia.]	Ø 180 [7,09 dia.]	145,4 [5,72]	Ø 228 [8,98 dia.]	Ø 18 [0,71 dia.]	5 x M14x1.5	10,5 [0,41]												
				Ø 92,7 [3,65 dia.]	Ø 140 [5,51 dia.]	Ø 180 [7,09 dia.]	145,4 [5,72]	Ø 228 [8,98 dia.]	Ø 18 [0,71 dia.]	5 x M14x1.5	10,5 [0,41]												
				-	Ø 100 [3,94 dia.]	Ø 120 h7 [4,72 dia.]	145,4 [5,72]	Ø 228 [8,98 dia.]	10 x M12x1.75	-	11,3 [0,44]												
				-	Ø 100 [3,94 dia.]	Ø 120 h7 [4,72 dia.]	178,7 [7,04]	Ø 228 [8,98 dia.]	10 x M12x1.75	-	11,25 [0,44]												
				Ø 92,7 [3,65 dia.]	Ø 140 [5,51 dia.]	Ø 276 [10,87 dia.]	209 [8,23]				10 x M14x1.5	30 [1,18]											
				Ø 160,7 [6,33 dia.]	Ø 205 [8,07 dia.]	Ø 276 [10,87 dia.]	209 [8,23]				6 x M18x1.5	35 [1,38]											
				Also see 'Brakes' section (thumbnail opposite).																			
				Ø 92,7 [3,65 dia.]	Ø 140 [5,51 dia.]	Ø 170 [6,69 dia.]	201,2 [7,92]	Ø 228 [8,98 dia.]	Ø 18 [0,71 dia.]	10 x M14x1.5	-												
				Ø 160,7 [6,33 dia.]	Ø 205 [8,07 dia.]	Ø 245 [9,65 dia.]	201,2 [7,92]	Ø 228 [8,98 dia.]	Ø 20 [0,79 dia.]	6 x M18x1.5	-												



The supports in gray must not be assembled with an MSE hydrobase.



For stronger bearings, consult with your Poclain Hydraulics application engineer.

Studs

		P	C min.	C max.	D	Class	(1)	(2)
		mm [in]	mm [in]	mm [in]	mm [in]		N.m [lb.ft]	N.m [lb.ft]
Various studs	M14x1.5	45 [1.77]	5 [0.20]	18 [0.71]	16.5 [0.65]	12.9	200 [147.5]	250 [184.4]
	M14x1.5	50 [1.97]		23 [0.91]				
	M14x1.5	62 [2.44]		33 [1.30]				
	M18x1.5	65 [2.56]		28 [1.10]				
Screws	M12x1.75	-	-	-	23.0 [0.91]	10.9	120 [88.5]	120 [88.5]
	1/2"-20 UNF	-	-	-		8.8		

(*) The tightening torques are given for the indicated loads.

(1) Wheel rim : Suggested tightening torque for wheel rim mountings (Re steel disc > 240 N/mm² > 34 800 PSI).

(2) Standard : Suggested tightening torque in other cases (Re steel flange 360 > N/mm² > 52 215 PSI)



See generic installation motors N°801478197L.






Load curves

Permissible radial loads

Test conditions :

Static : 0 tr/min [0 RPM] 0 bar [0 PSI]















Dynamic : 0 tr/min [0 RPM], code 0 displacement, without axial load at max. torque




Service life of bearings

Test conditions :

L : Millions B10 revolutions at 150 bars (average pressure), with 25 cSt fluid, code 0 displacement, without axial load.



The service life of the components is influenced by the pressure. You must check that the combination of forces applied (Axial load / Radial load) is compatible with the permissible loads for the components, and that the resulting service lives of these components complies with the application's specifications. For an accurate calculation, consult your Poclain Hydraulics application engineer.



Modularity and
Model code

Wheel motor

Shaft motor

Valving systems
and hydrobases

Brake


Options





SHAFT MOTOR

Dimensions for standard (2A50) 1-displacement motor

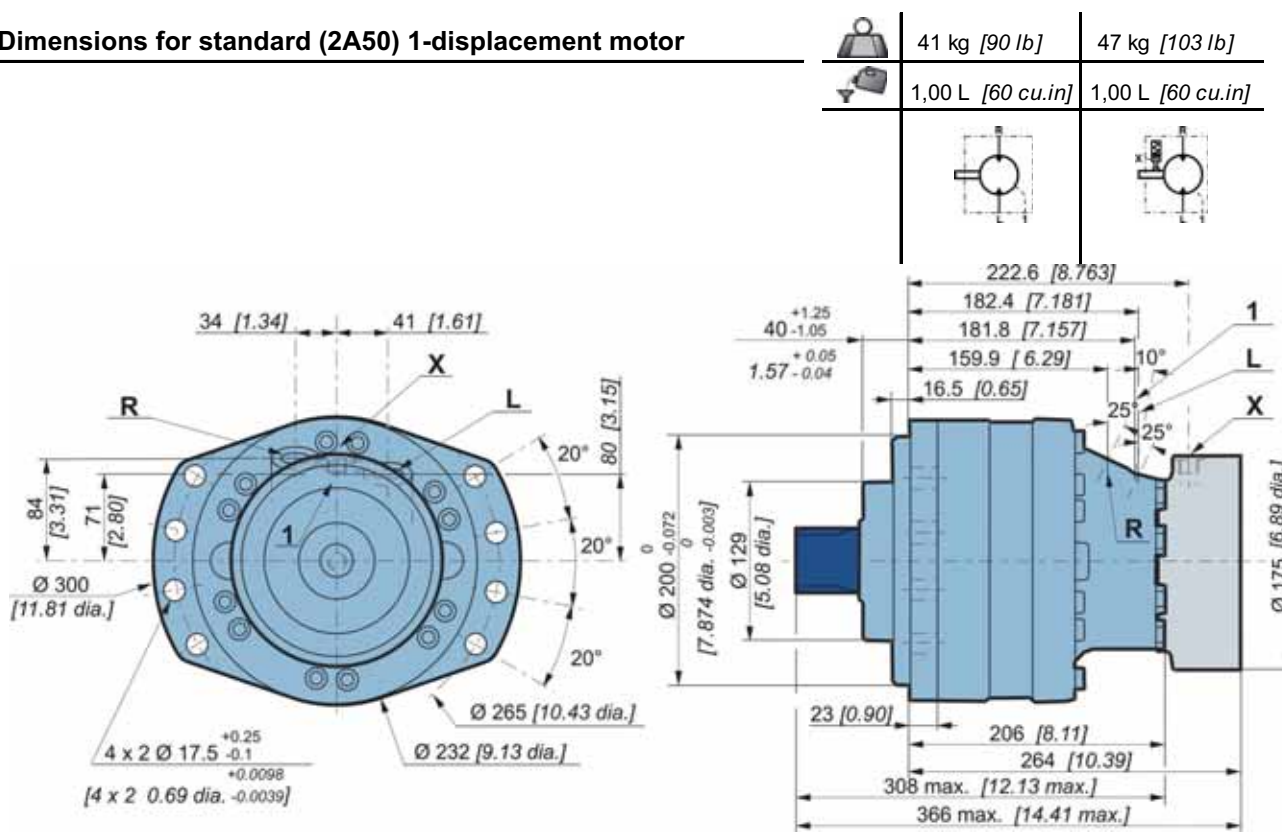


Modularity and Model code

Wheel motor

Shaft motor

Dimensions for standard (2A50) 2-displacement motor

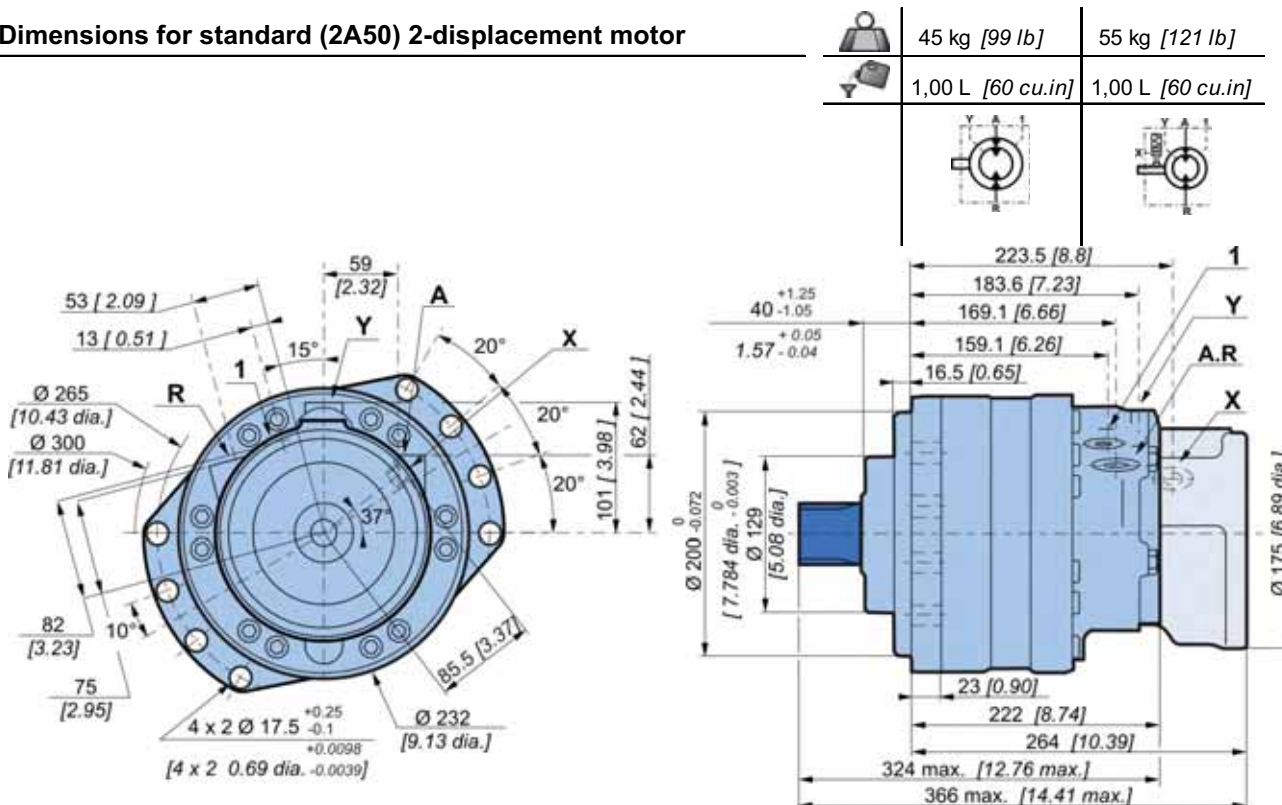

Valving systems and hydrobases

Brake


Options



Also see 'Valving systems and hydrobases' section (thumbnail opposite).



Support types

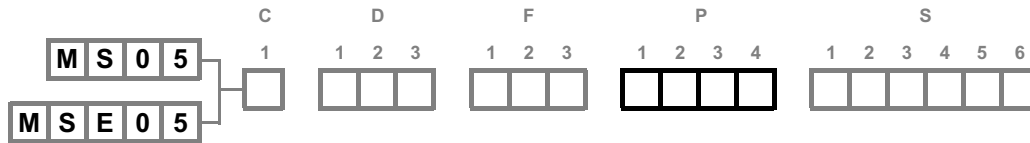


				A	B	C	D	E	F	G	
DIN 5480 splines											
2	A	5	0	15	R 2,3	23,8	2 x M10	23	60	-	
1	2	3	4	[0,59]	[R 0,09]	[0,94]		[0,91]	[2,36]		
P											
NF E22-141 splines											
2	A	1	0	15	R 2,3	23,8	2 x M10	20	54	-	
1	2	3	4	[0,59]	[R 0,09]	[0,94]		[0,79]	[2,13]		
P											
ANSI B29-1 or ISO 606 pinion											
2	A	C	0	158,2	106	49	17,6	117	-	-	
1	2	3	4	[6,23]	[1,97]	[1,91]	[0,69]	[4,61]			
P											



Also see 'Valving systems and hydrobases' section (thumbnail opposite).


Splined coupling



N : Nominal Ø.
Mo : Module.
Z : Number of teeth.

Standard DIN 5480
 Pressure angle 30°.
 Centering on flanks.
 Slide adjustment (7H quality).

Standard NF E 22-141
 Pressure angle 20°.
 Centering on flanks.
 Slide adjustment (7H quality).

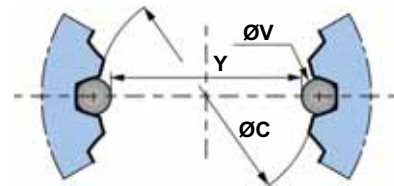

				Ø G	H	Ø J	K	N	Mo	Z	Offset	Ø C (H10)	Ø V	Y	Tolerance µm [µin]
2	A	1	0	51	23	46,7	53	50	1,667	28	+1,333	46,7	3,333	43,446	+ 86 / 0
1	2	3	4	[2,01]	[0,91]	[1,84]	[2,09]	[1,97]			[+0,052]	[1,84]	[0,1312]	[1,71]	[+3.386 / 0]
P															
2	A	5	0	56,5	24	49	59	55	3	17	+0,35	49	5,25	43,807	+ 78 / 0
1	2	3	4	[2,22]	[0,94]	[1,93]	[2,32]	[2,17]			[+0,0138]	[1,93]	[0,21]	[1,7247]	[+3.071 / 0]
P															

General tolerances : ± 0.25 [±0.0098].

Material: Ex: 42CrMo4.

Hardening treatment to obtain R = 800 to 900 N/mm² [R = 116 030 to 130 533 PSI].




Load curves

Permissible radial loads

Test conditions :

Static : 0 tr/min [0 RPM] 0 bar [0 PSI]

Dynamic : 0 tr/min [0 RPM], code 0 displacement, without axial load at max. torque





Service life of bearings

Test conditions :

L : Millions B10 revolutions at 150 bars (average pressure), with 25 cSt fluid, code 0 displacement, without axial load.



2 A 5 0
1 2 3 4

P

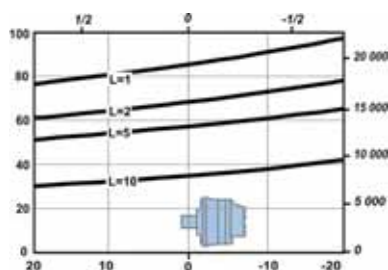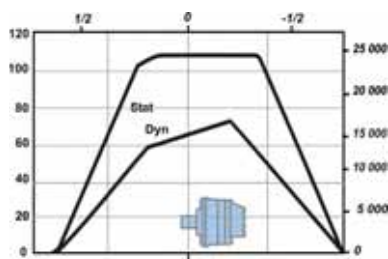



2 A 1 0
2 A 4 0
1 2 3 4

P

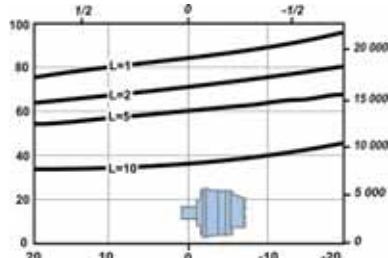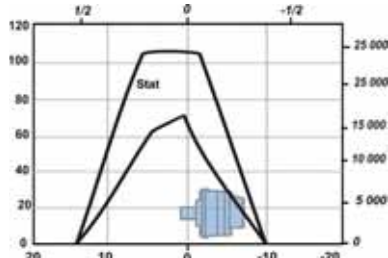

2 A C 0
1 2 3 4

P

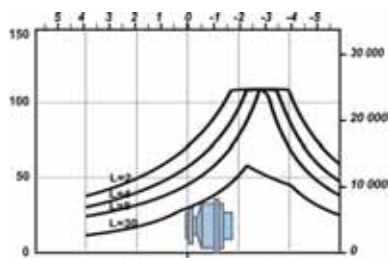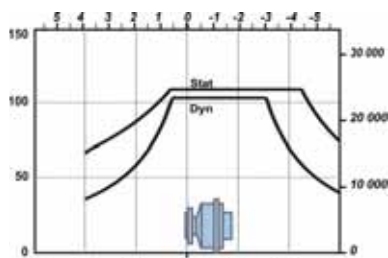

The service life of the components is influenced by the pressure. You must check that the combination of forces applied (Axial load / Radial load) is compatible with the permissible loads for the components, and that the resulting service lives of these components complies with the application's specifications. For an accurate calculation, consult your Poclain Hydraulics application engineer.




G

2 A 1 0 77,25 [3,04]

2 A 5 0 81,75 [3,22]

2 A C 0 61,45 [2,42]



Modularity and
Model code

Wheel motor

Shaft motor

Valving systems
and hydrobases


Brake

Options









VALVING SYSTEMS AND HYDROBASES

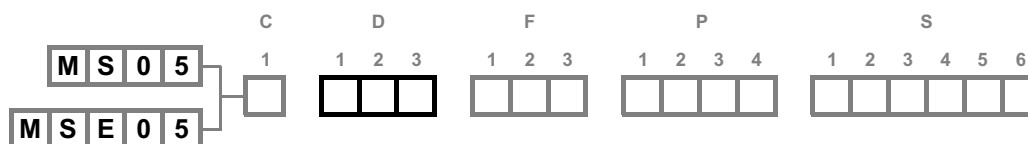

Dimensions for 1-displacement valving


	23,7 kg [52 lb]	31,7 kg [70 lb]
	0,50 L [30 cu.in]	1,00 L [60 cu.in]

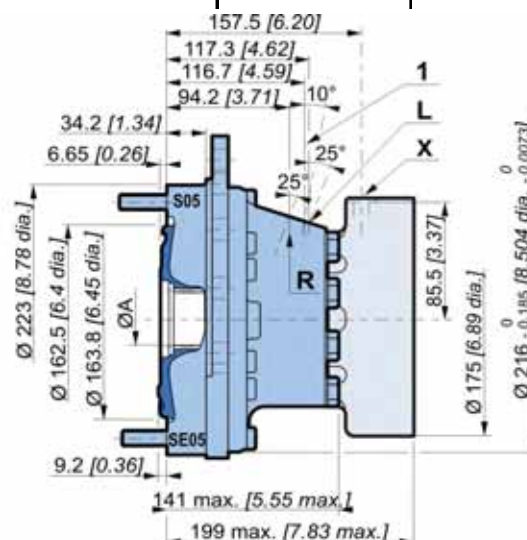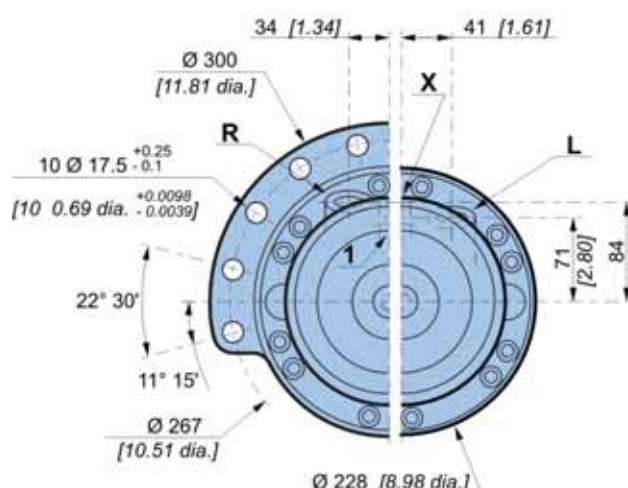

Cylinder block splines

(as per standard NF E22-141)

ØA	Module	Z	Dimension on 2 pins	
			Y	ØV
50 [1,968]	1,667	28	43,446 [1,710]	3,33 [0,131]

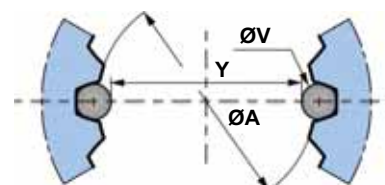

You are advised to have the installation validated by your Poclain Hydraulics application engineer before using the



We must provide you with a detailed plan of the interface for any hydraulic unit use, consult your Poclain Hydraulics sales en-

Modularity and Model code

Wheel motor

Shaft motor







Valving systems and hydrobases

Brake

Options

**Dimensions for 2-displacement valving**


	27,6 kg [61 lb]	35,2 kg [77 lb]
	0,50 L [30 cu.in]	1,00 L [60 cu.in]

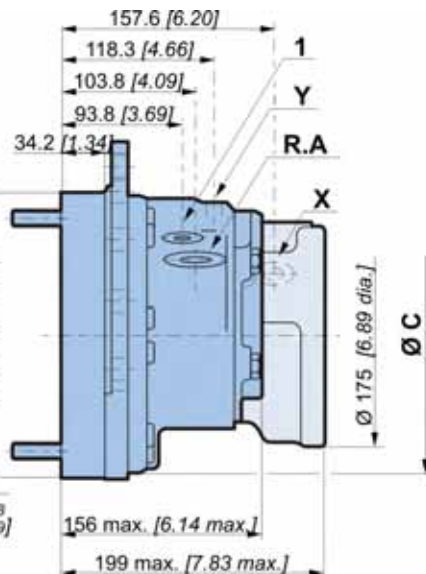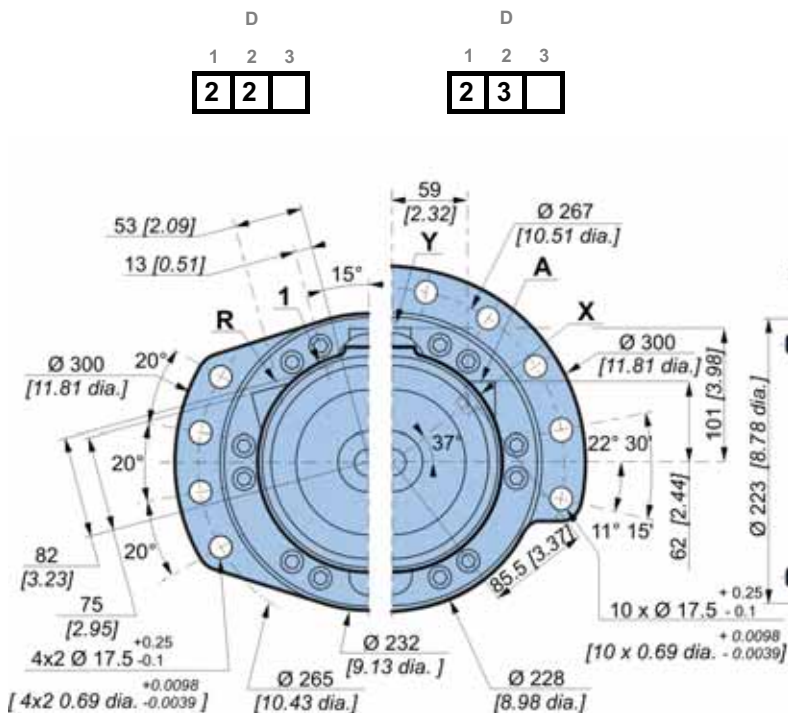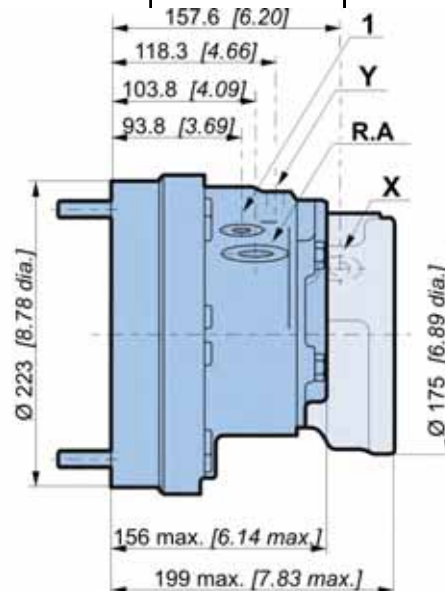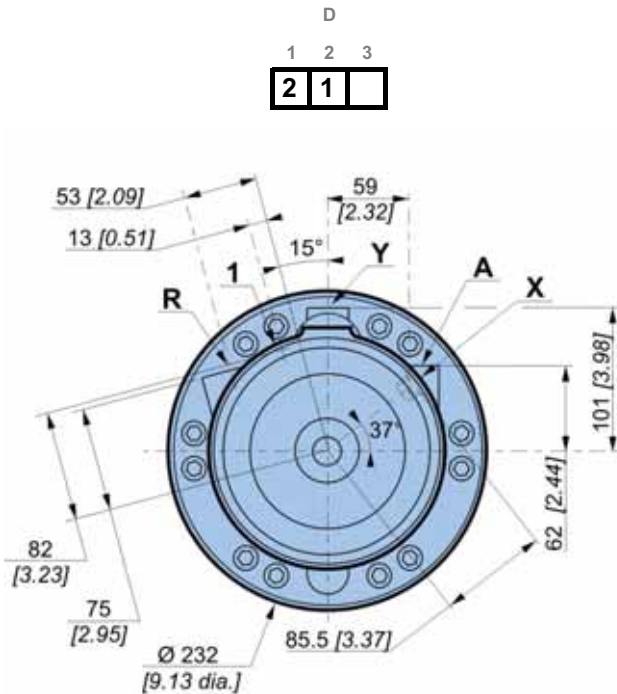


	mm [in]	mm [in]
Ø C	Ø 224 -0,2 [8,82dia.] - 0,078	Ø 216 -0,185 [8,50 dia.] - 0,0073



Dimensions for Twin-Lock™ valving


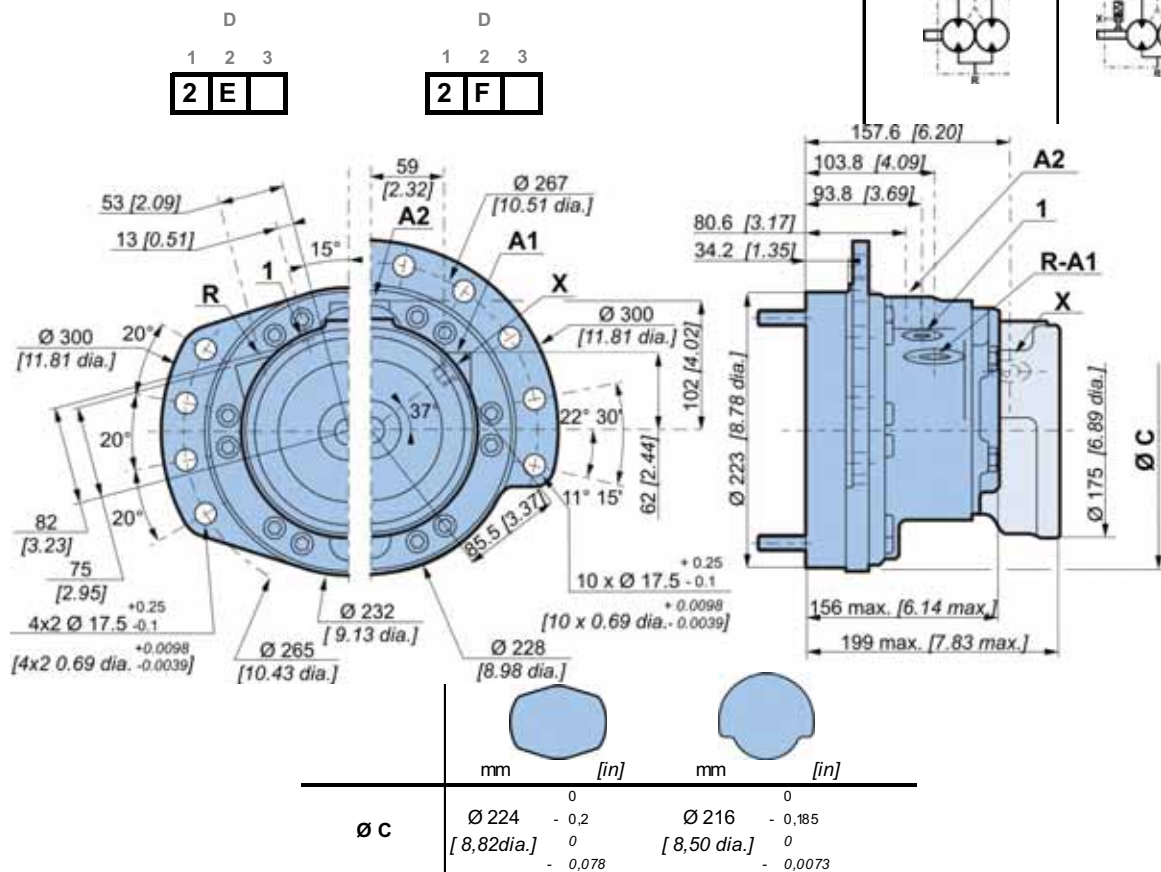




Dimensions for 1-displacement valving with built-in exchange

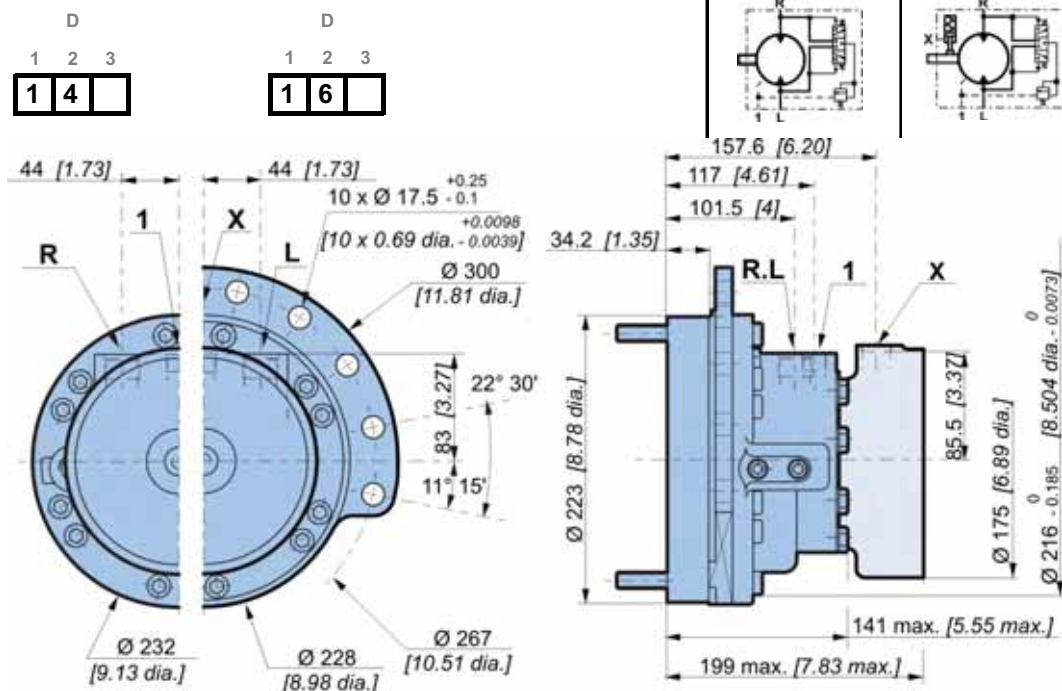



Dimensions for 2-displacement valving with add-on exchange

	27,6 kg [61 lb]	35,2 kg [77 lb]
	0,50 L [30 cu.in]	1,00 L [60 cu.in]
		

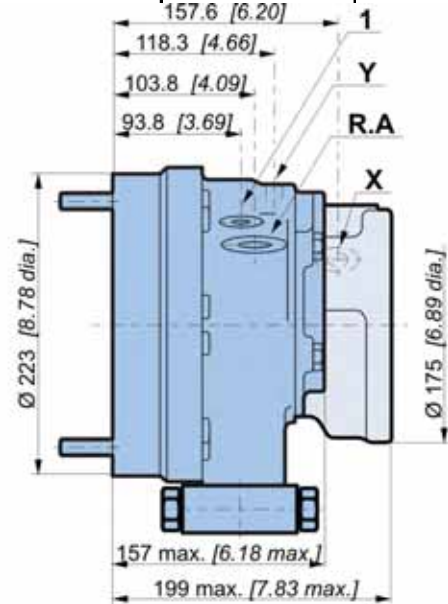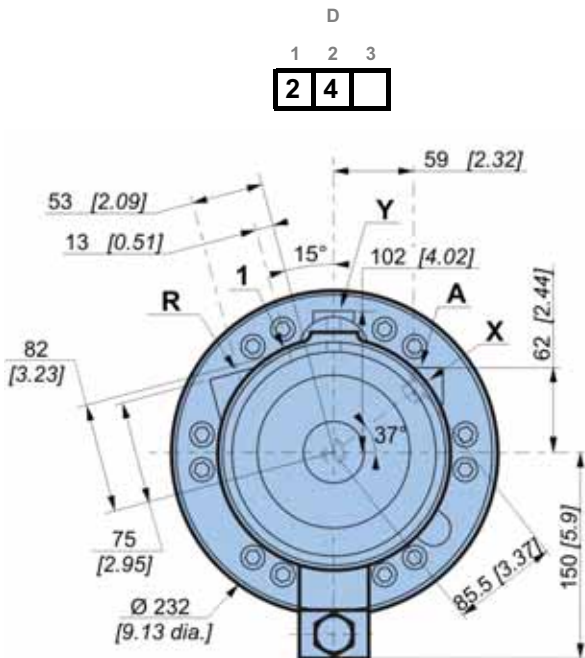

Exchange


When a coding request is made, you must specify information on the threshold of the selector and the valve.

Selector spool

Selector threshold bar [PSI]	Opening pressure of selector bar [PSI]
8 [116]	9.9 ± 1.2 [144 ± 17]


Fitted valve

P1 bar [PSI]	Q2 L/min [GPM]	P2 bar [PSI]
13.5 [195]	14 [3.7]	16 [232]
18 [261]	15 [3.9]	21 [305]
22 [319]	16 [4.2]	25 [363]

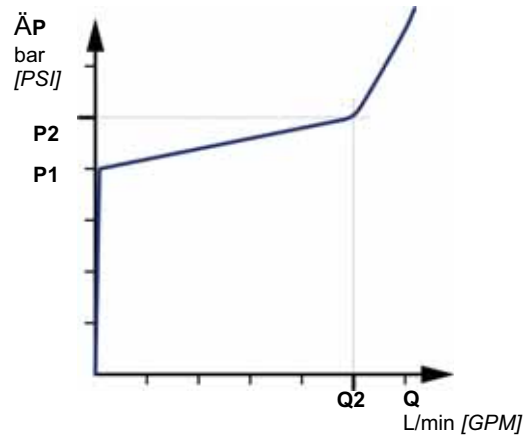



Chassis mountings

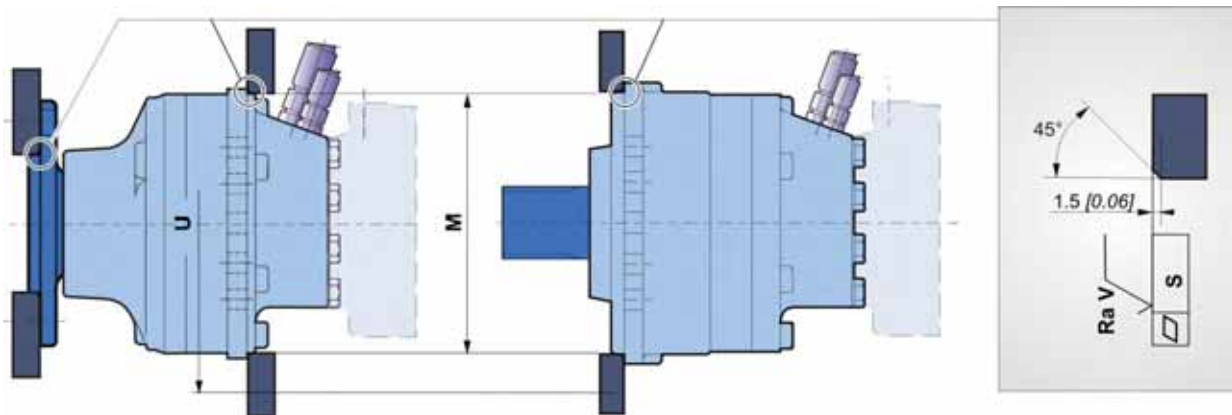

Take care over the immediate environment of the connections.

MS05 / MSE05	ØM ⁽¹⁾	ØU	S	Ra V		Class	 *
P	200 [7,87]	265 [10,43]	0,2 [0,008]	12,5µm [0,49µin]	2 x 4 M16 x 2	8,8	210 N.m [155 lb.ft]
R 	216 [8,50]	267 [10,51]			10 M16 x 2		
R 	224 [8,82]	265 [10,43]			2 x 4 M16 x 2		
P	200 [7,87]	265 [10,43]			2 x 4 M16 x 2		
R 	216 [8,50]	267 [10,51]			10 M16 x 2		
R 	224 [8,82]	265 [10,43]			2 x 4 M16 x 2		

(1) +0,3 [+0,012]
+0,2 [+0,008]

* : Min. values for torque and load to be transmitted.



See generic installation motors N°801478197L.

Modularity and
Model code

Wheel motor

Shaft motor

Valving systems
and hydrobases



Brake

Options



Hydraulic connections

connections

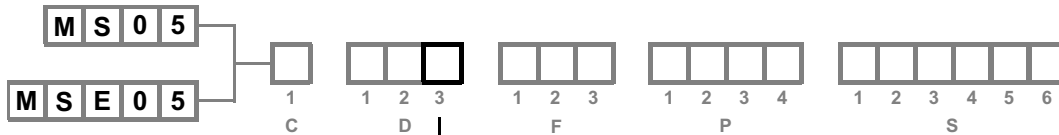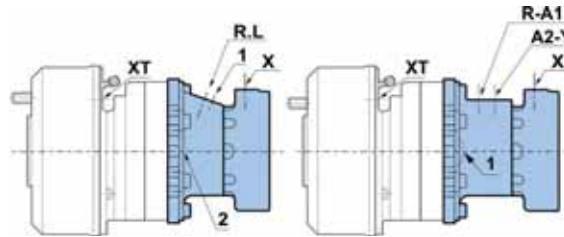

	Old standards	Standards	Power supply	Case drain	2 nd displacement control	Control of parking break	Control of drum break
			R-L	1, 2		X	XT
	A	SAE J514	ISO 11 926-1	1"1/16-12 UNF	3/4"-16 UNF	9/16"-18 UNF	
	3	BSPP	ISO 1 179-1	Ø27 [3/4" dia.]	Ø17 [3/8" dia.]	Ø13 [1/4" dia.]	
	8	NF E48 050	ISO 6 149-1	M18x1.5	M16x1.5	M14x1.5	
			R-A	1, 2	Y	X	
	A	SAE J514	ISO 11 926-1	1"1/16-12 UNF	3/4"-16 UNF	9/16"-18 UNF	9/16"-18 UNF
	3	BSPP	ISO 1 179-1	Ø27 [3/4" dia.]	Ø17 [3/8" dia.]	Ø13 [1/4" dia.]	Ø13 [1/4" dia.]
	4	NF E48 050	ISO 9 974-1	M27x2	M16x1.5	M14x1.5	M14x1.5
			R-A1	A2	1, 2	X	
	A	SAE J514	ISO 11 926-1	1"1/16-12 UNF	3/4"-16 UNF	3/4"-16 UNF	9/16"-18 UNF
	3	BSPP	ISO 1 179-1	Ø27 [3/4" dia.]	Ø21 [1/2" dia.]	Ø17 [3/8" dia.]	Ø13 [1/4" dia.]
	4	NF E48 050	ISO 9 974-1	M27x2	M22x1.5	M16x1.5	M14x1.5
			ISO 9 974-1				M10x1
Max. pressures	MS	bar [PSI]	450 [6 527]	450 [6 527]	1 [15]	30 [435]	30 [435]
	MSE		400 [5 802]	400 [5 802]			120 [1 740]



You are strongly advised to use the fluids specified in brochure "Installation guide" N° 801478197L.





To find the connections' tightening torques, see the brochure "Installation guide" N° 801478197L.



Efficiency



Overall efficiency

Average values given for guidance for code 0 displacement after 100 hours of operation with HV46 hydraulic fluid at 50°C [122°F].





Actual output torque

MS05

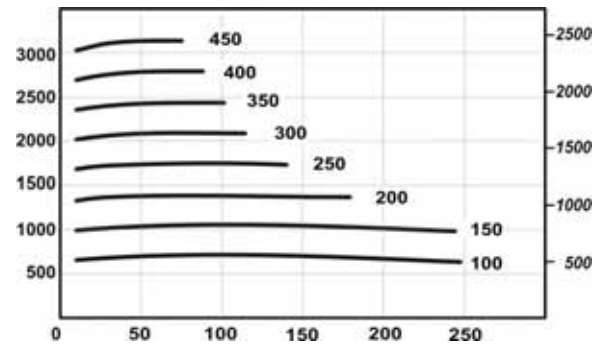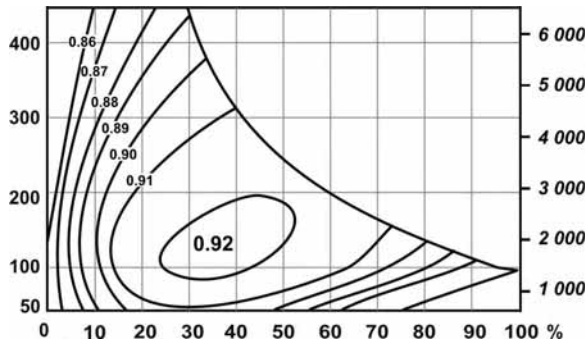

MSE05

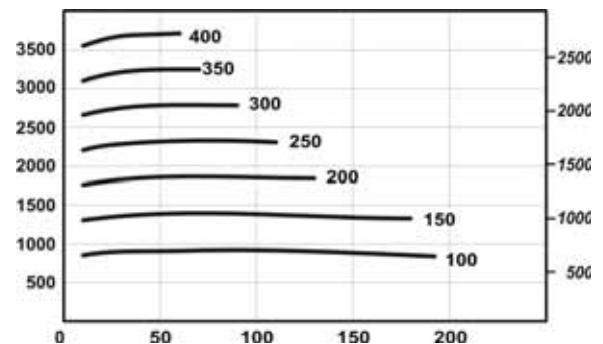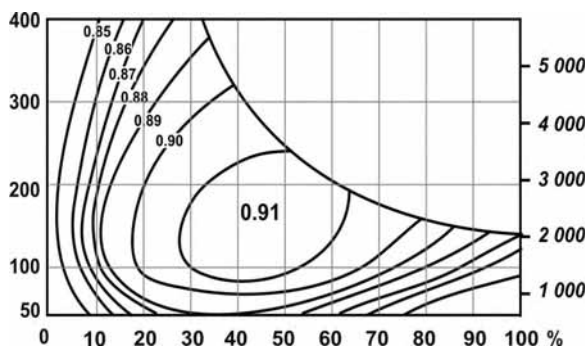

The starting torque is taken to be approximately 85% of the first value for available pressure. For a precise calculation, consult your Poclain Hydraulics application engineer.

Modularity and Model code

Wheel motor

Shaft motor

Valving systems and hydrobases


Brake

Options






BRAKES

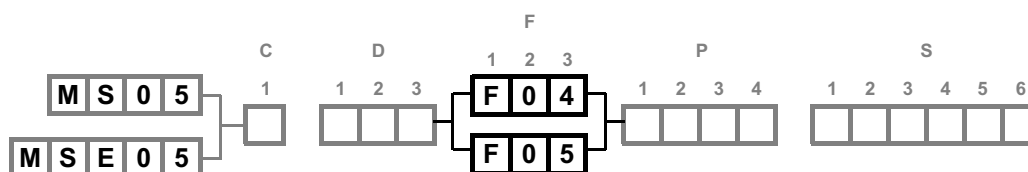

Rear brake

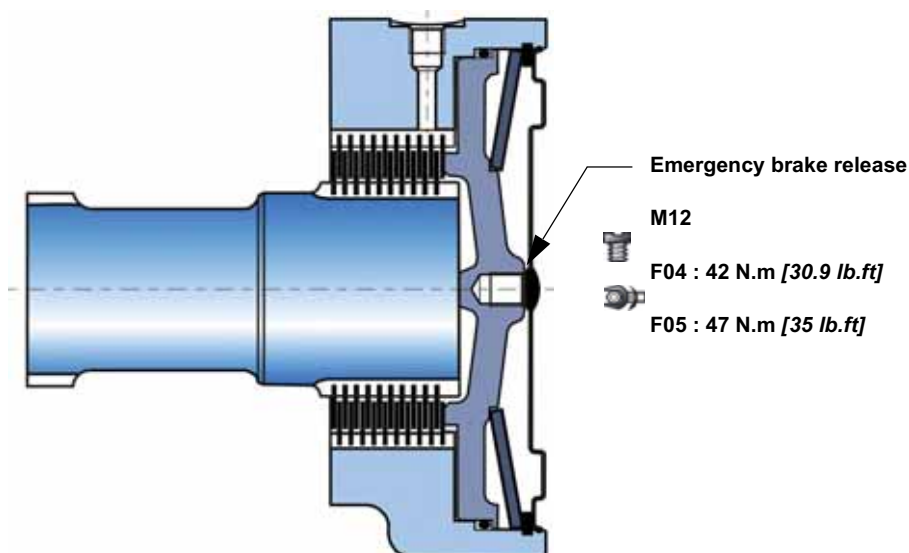

Brake principle

This is a multidisc brake which is activated by a lack of pressure. The spring exerts a force on the piston, which presses on the fixed and mobile discs, and immobilizes the shaft. The braking torque decreases in linear proportion to the brake release pressure.

	F 0 4	F 0 5
C Parking brake torque at 0 bars on housing (new brake)	4 220 Nm [3 110 lb.ft]	3 060 Nm [2 260 lb.ft]
Dynamic emergency braking torque at 0 bars on housing (max. 10 uses of emergency brakes)	2 740 Nm [2 020 lb.ft]	1 990 Nm [1 470 lb.ft]
Residual parking braking at 0 bars on housing *	3 165 Nm [2 330 lb.ft]	2 295 Nm [1 690 lb.ft]
Min. brake release pressure	12 bar [174 PSI]	12 bar [174 PSI]
Max. brake release pressure	30 bar [435 PSI]	30 bar [435 PSI]
Oil capacity	70 cm ³ [4,3 cu.in]	70 cm ³ [4,3 cu.in]
Volume for brake release	32 cm ³ [2,0 cu.in]	32 cm ³ [2,0 cu.in]
Max. energy dissipation	85 902 J	

* After emergency brake has been used



Do not run in multidisc brakes.



A functional check of the parking brake must be carried out each time it is used as an auxiliary brake (or emergency brake). For all vehicles capable of speeds over 25 km/hour, please contact your Poclain Hydraulics application engineer.

Modularity and
Model code

Wheel motor

Shaft motor

Valving systems
and hydrobases



Brake

Options

**Drum brake (250 x 60)**

Diameter of brake pads : Ø 250 [9.84 dia.]

Width of friction surface : 60 [2.36]

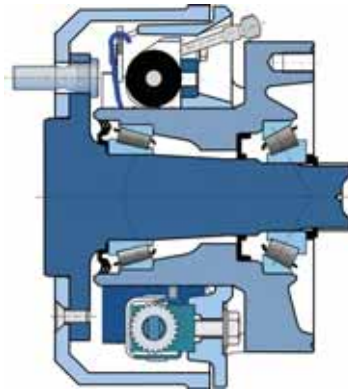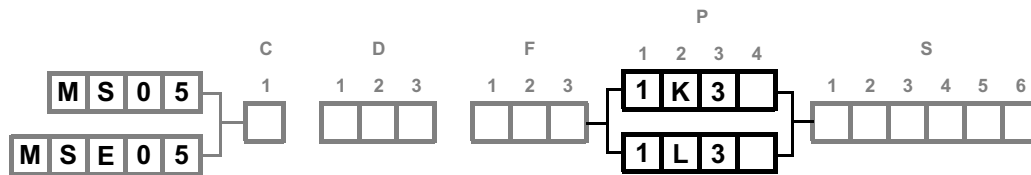**Brake pads**

Asbestos free material	BERAL 1117
Compensation for wear	Automatic

Hydraulically controlled dynamic braking

Max. permissible continuous brake torque	3 000 N.m [2 213 lb.ft]
Pressure to obtain max. permissible continuous brake torque	76 bar [1 102 PSI]
Max. permissible brake torque	5 000 N.m [3 688 lb.ft]
Pressure to obtain max. permissible brake torque	120 bar [1 740 PSI]


Fluid	Yes
--------------	-----

Mineral	Yes	K	C
DOT 3/DOT4/SAE J1703		L	

Max. volume required to bring pads into contact	2,8 cm³ [0,17 cu.in]
---	----------------------

Mechanically controlled parking brake

Max. braking torque		5 000 N.m [3 688 lb.ft]
Max permissible force on the cable		1 370 N [308 lbf]
Force required to bring pads into contact		33 N [7 lbf]
Stroke required to bring pads into contact	A	10,6 mm [0,42 "]
	B	11,0 mm [0,43 "]
Max. stroke before automatic brake adjustment	A	14,0 mm [0,55 "]
	B	14,5 mm [0,57 "]



The max. braking torque can only be obtained when the brake has been run in. Consult your Poclain Hydraulics application engineer.

Control

The drum brakes can be controlled hydraulically (service brake) and by a cable (mechanical control for parking brake).



Do not use hydraulic and mechanical brake controls simultaneously.



See also 'Wheel motor' section (thumbnail opposite)




When making an encoding request, you must indicate the following information:

- The material of the brake linings,
- The type of connection at the end of the parking brake control cable,
- Fill out the technical questionnaire for validation of the brake.




OPTIONS

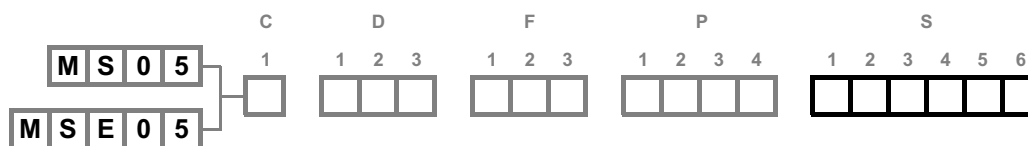

You can accumulate more than one optional part. Consult your Poclain Hydraulics sales engineer.

1 - Fluorinated elastomer seals

Nitrile seals marked in the figure below replaced by fluorinated elastomer seals.



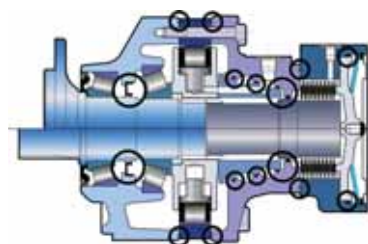


Consult your Poclain Hydraulics sales engineer.

2 - S - 8 - Installed speed sensor or predisposition

Designation

T4 Speed sensor installed	2
TR Speed sensor installed (direction of rotation)	S
Predisposition for speed sensor	8

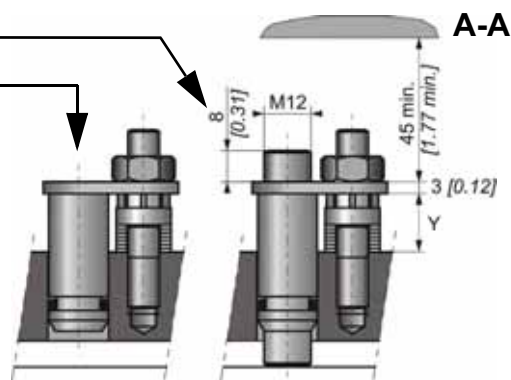

Max. length Y= 20.7

Standard number of pulses per revolution= 53



Look at the "Mobile Electronic" N° A01889D technical catalogue for the sensor specifications and its connection.



To install the sensor, see the "Installation guide" brochure No. 801478197L.

Modularity and Model code

Wheel motor

Shaft motor

Valving systems and hydrobases


Brake

Options




3 - Brake environmental cover without plug

No plug or hole in the cover.
(see figure opposite)



5 - Drainage

Additional drain in the cover.

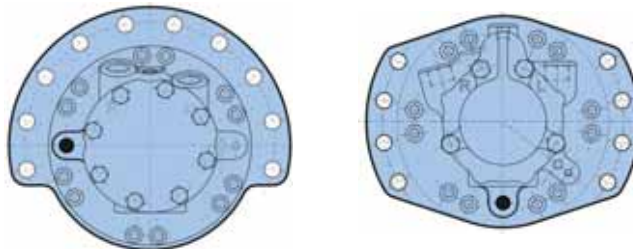

6 - Industrial support

Reduction of around 50% from the rated value in the bearings' preload value.




For a precise calculation, consult your Poclain Hydraulics application engineer.

7 - Diamond™

Special treatment of the motor core which considerably increases its strength, making the motor much more tolerant to temporary instances of the operating conditions being exceeded.

A - Hollow shaft

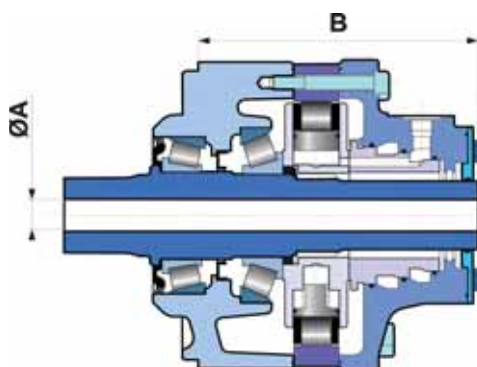


A mm [in]	B mm [in]
Ø 25 [0,98 dia.]	214,2 [8,43]

Radial load x 0.75
No torque allowed towards the rear



B - Drain on the bearing support

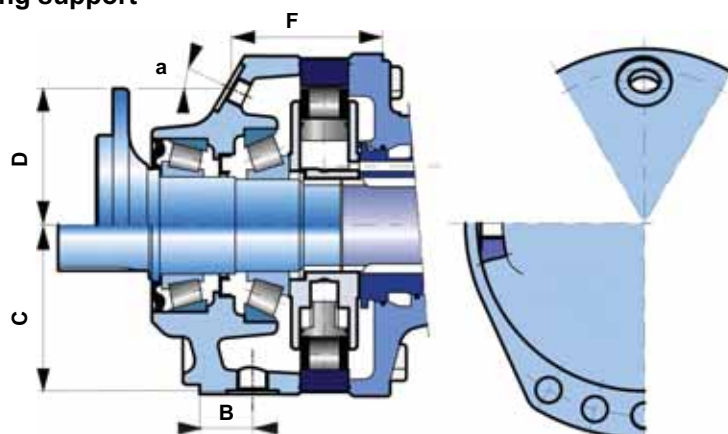

	BSPP	B mm [in]	C mm [in]	D mm [in]	E	F mm [in]	a
Shaft motor	Ø17	25 [1,0]	111 [4,37]		25°		
Wheel motor	Ø17			87,5 [3,44]		84,0 [3,31]	36°

C - Abrasive environments (mechanical seal)

Some environments can be very harmful. The mirror seal gives reinforced motor sealing.


Mechanical seal



Consult your Poclain Hydraulics sales engineer.

E - Reinforced sealing

Reinforced seals and, for an unbraked motor, a rear reinforced plate (R02 - 8 mm thick, instead of 2 mm).

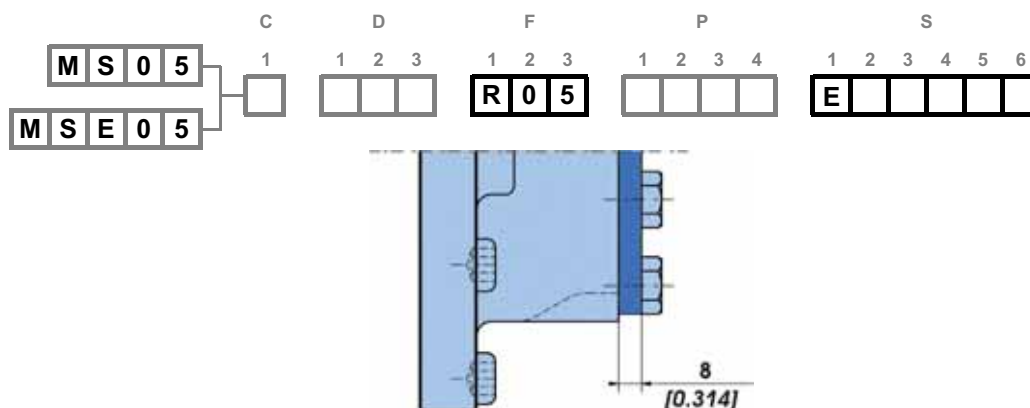

G - Special wheel rim mounting

Enables certain combinations different from the standard mountings defined on page 11 are possible.



Consult your Poclain Hydraulics sales engineer.

H - High efficiency

Reinforced piston sealing to improve volumetric efficiency.



For a precise calculation, consult your Poclain Hydraulics application engineer.

Modularity and
Model code

Wheel motor

Shaft motor

Valving systems
and hydrobases


Brake

Options



J - Treated shaft

Heat treatment on the indicated bearing radius and splines.

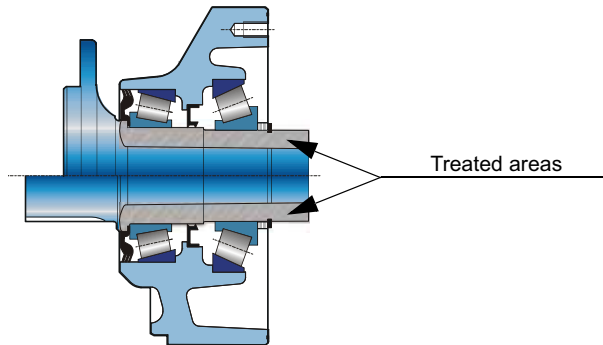

M - High speed


Under certain conditions, an increase in the maximum speed of 30% above the values indicated in the table on page 2 is possible.



For a precise calculation, consult your Poclain Hydraulics application engineer.

T - Soft Shift™


Progressive displacement change (cushioned slide-valve)



Consult your Poclain Hydraulics sales engineer.



Thirteen subsidiaries and a worldwide network
of more than 150 distributors and partners ...

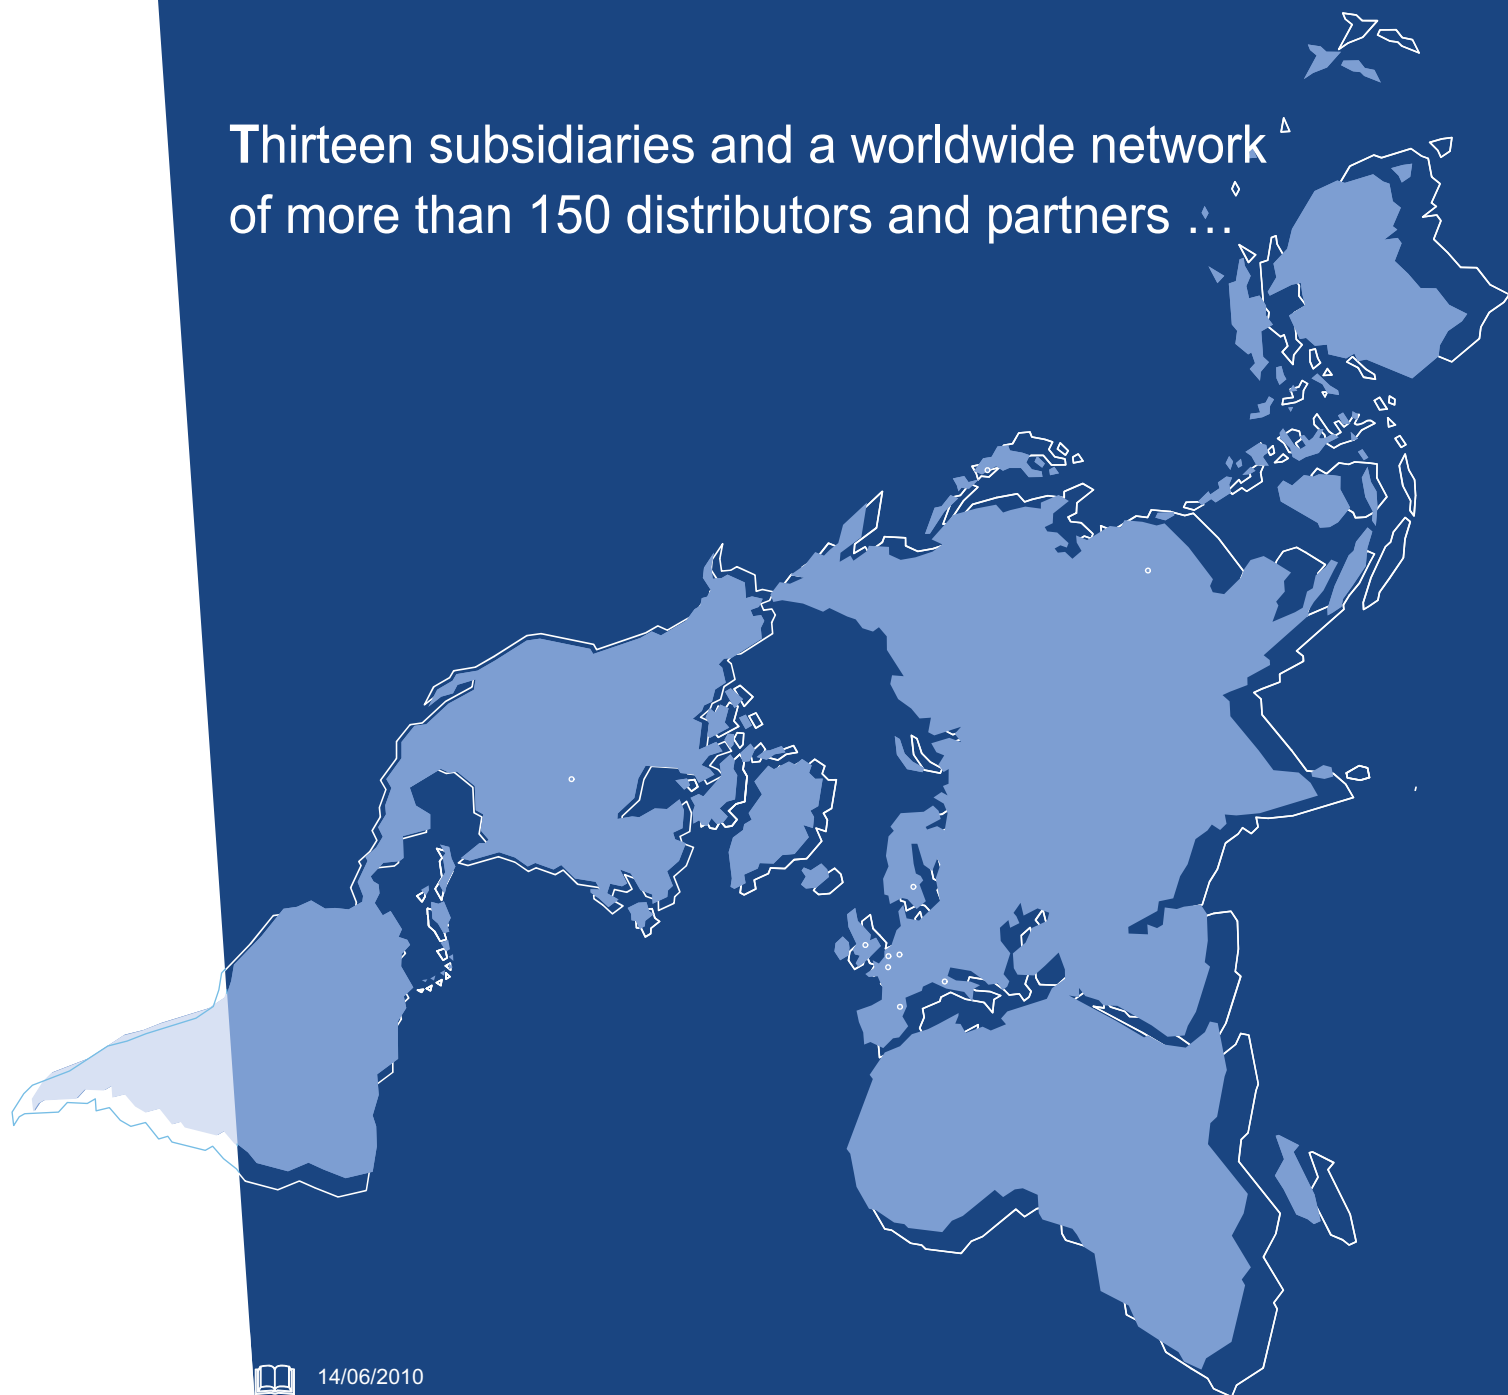

	14/06/2010
	801 478 118A
	801 478 188B
	801 578 101C
	801 578 113Q
	801 578 125D
	A07441N
	Not available
	07441N

Poclain Hydraulics reserves the right to make any modifications it deems necessary to the products described in this document without prior notification. The information contained in this document must be confirmed by Poclain Hydraulics before any order is submitted.

Illustrations are not binding.

The Poclain Hydraulics brand is the property of Poclain Hydraulics S.A.



More information on

