
*		RYSLER CORPORATION CATALYST	ENGINE DISPLACEMENT 4.00 ENGINE FAMILY PCR4.0T5F0 EVAPORATIVE FAMILY FTAPP	GA6
62		THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO 1993 MODEL YEAR NEW LIGHT-DUTY TRUCKS AT ALL ALTITUDES	FAMILY NO _X SYSTEM LIMIT - 1.2	
ம்			SPECIFICATIONS +	AUTO MAN
		BASIC IONITION TIMING AND IDLE FUELAIR MIXTURE HAVE BEEN PRESET AT THE FACIDAY SEE THE SERVICE MANNAL FOR PROPER PROJECURES AND OTHER ADDITIONAL INFORMATION. ADJASTHEN'S MADE BY OTHER THAN APPROVED SERVICE MANUAL PROCEDURES MAY VIOLATE FEDERAL AND STATE LAWS. CAUTION: APPLY PARKING BRAKE WHEN SERVICING VEHICLE.	SPARK PLUG CAP	.335 in 90-12LYC
\circ			IGNITION JIMING	
\circ			CURB IDLE SPEED (RPM)	NO ADJUSTMENTS NEEDED
53			FAST IDLE SPEED	
			IDLE CO	



J9325-9


Fig. 3 VECI Label—Typical

Control Information (VECI) label schematics, those shown on the VECI label should be used.

DRB SCAN TOOL

For operation of the DRB scan tool, refer to the appropriate Powertrain Diagnostic Procedures service manual.

VACUUM ROUTING SCHEMATIC-2.5L 4 CYLINDER ENGINE

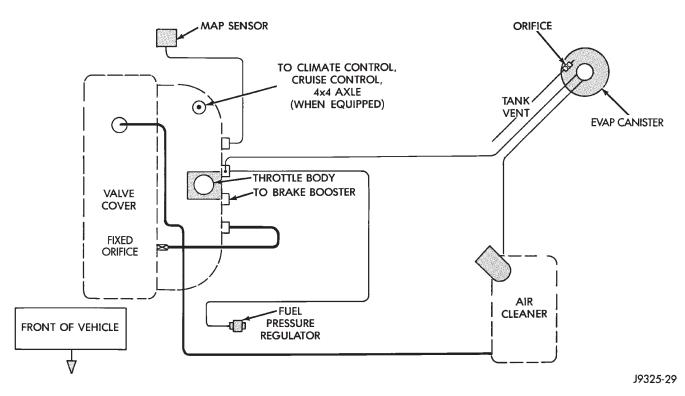

. J