



Oronite

Classifications and Specifications Guide Automotive Engine Lubricants September 2020

ADDING UP[®]



Chevron Oronite is an indirect, wholly owned subsidiary of Chevron, one of the world's leading integrated energy companies.

We utilize over 100 years of additive chemistry expertise to develop, produce and market innovative products that meet new lubricant specifications resulting from more stringent industry and government standards.

We leverage our expertise, insights, and strategic position to deliver trusted technical solutions that create value.

We have an unwavering focus on operational excellence with a commitment to supply quality products safely and reliably, on time, every time.

And we are committed to long-term collaborative relationships built on trust, integrity and flexibility.

The Automotive Engine Lubricants Classification and Specifications Guide is one example of how Oronite Adds Up... for you.

Contents

Chapter 1: Viscosity classifications - SAE J300

SAE J300 revised January 2015 - SAE viscosity grades for engine oils	8
--	---

Chapter 2: API and ILSAC requirements for gasoline and diesel engine oils

API «S» and ILSAC Gasoline service categories engine and laboratory test requirement summary	
- Current	10
- Obsolete	11
API SM, SN, SN + RC Gasoline service category laboratory test limits	12
API SH, SJ and SL Gasoline service category laboratory test limits	14
API «S» Gasoline service categories engine test limits	16
ILSAC GF-4, GF-5 and GF-6 Standard laboratory test limits	19
ILSAC GF-1, GF-2 and GF-3 Standard laboratory test limits	21
ILSAC Standards engine test limits	22
API «C» Diesel service categories engine and laboratory test requirement summary - Current	25
API «C» Diesel service categories laboratory test limits - Current	26
API «C» Diesel service categories engine test limits - Current	28
API «C» Diesel service categories engine and laboratory test requirement summary - Obsolete	32
API «C» Diesel service categories engine test limits - Obsolete	33

Chapter 3: ACEA sequences for gasoline and diesel engine oils

ACEA sequences - Overview of validity periods	37
ACEA 2016 European oil sequence for service-fill oils	
- For gasoline and diesel engines	38
- For heavy duty diesel engines	46
ACEA 2012 European oil sequence for service-fill oils	
- For gasoline and diesel engines	50
- For heavy duty diesel engines	63

Contents

Chapter 4: China GB, Global DHD-1, JASO HD-DL and US Military requirements for diesel engine oils

GB 11121 - 2006 (#) - Passenger car gasoline engine oil	64
GB 11122 - 2006 (#) - Heavy duty diesel engine oil	66
GLOBAL DHD-1- specification	68
JASO DH-1, DH-2, DH-2F, DL-0, DL-1 specification - Laboratory test	70
JASO DH-1, DH-2, DH-2F, DL-0, DL-1 specification - Engine test	72
MIL-PRF-2104M specification	74

Chapter 5: OEM requirements for gasoline and diesel engine oils

BMW	79
CATERPILLAR	81
CHRYSLER	83
CUMMINS	84
DETROIT	90
DEUTZ	96
FIAT	100
FPT	104
FORD	105
GM	106
JAGUAR	112
MAN	113
MERCEDES-BENZ	115
MTU	133
PACCAR DAF	137
PORSCHE	138

Contents

PSA - PEUGEOT - CITROEN	139
RENAULT	147
SCANIA	149
VOLVO	150
VOLKSWAGEN	156
Chapter 6: ACC, API, ATC and ATIEL codes of practice (CoP)	
API and ATIEL base stock categories	161
API EOLCS definitions for Base Oil Interchangeability guidelines	162
ATIEL Code of Practice definitions for base stock interchange guidelines	163
ATIEL base stock interchange guidelines use of alternative base stocks in validated formulations	164
ACC and ATC guidelines for minor formulation modifications	165
ACC guidelines for program guidelines	169
ACC and ATC guidelines data required for candidate data packages	170
Chapter 7: API guidelines for:	
- Viscosity grade read-across (VGRA)	
- Base oil interchange (BOI)	
API 1509 - Engine Oil Licensing and Certification System Guidelines:	
- Viscosity Grades Read Across Requirements for formulations containing Group I, II, III and IV base stocks	173
API 1509 - Engine Oil Licensing and Certification System Guidelines: API Base Oil Interchangeability guidelines for passenger car motor oils	194
API 1509 - Engine Oil Licensing and Certification System Guidelines: API Base Oil Interchangeability guidelines for diesel engine oils	203

Contents

Chapter 8: ATIEL guidelines for:

- Viscosity grade read-across (VGRA)
- Base oil interchange (BOI)
- Viscosity modifier interchange

ATIEL viscosity grade read across guidelines	217
ATIEL Base oil interchange guidelines	
- For the M271Evo & M111SL	226
- For the DV6C, DV4TD, TU3M	227
- For the M111 FE test	228
- For the OM646LA test	229
- For the VW TDI, OM646LA Bio, EP6CDT, TU5JP & OM501LA	230
ATC viscosity modifier interchange guidelines	231

Chapter 9: Tests and engines

Engine test conditions	233
------------------------------	-----

Chapter 10: Elastomer compatibility testing

Elastomer compatibility operating conditions and limits.....	239
--	-----

Chapter 11: Requirements for approvals and performance recognition

Approvals and performance recognition	253
---	-----

Chapter 12: OEM requirements for natural gas engine oils


Requirements for gas engine oils for busses and trucks	256
--	-----

Chapter 13: Unit conversion

Unit conversion tables (temperature conversion)	259
Measurement conversion from US to SI units	262
Decimal inches to millimeters - Millimeters to inches	264

Acronym table	265
---------------------	-----

**Viscosity
classifications
SAE J300**

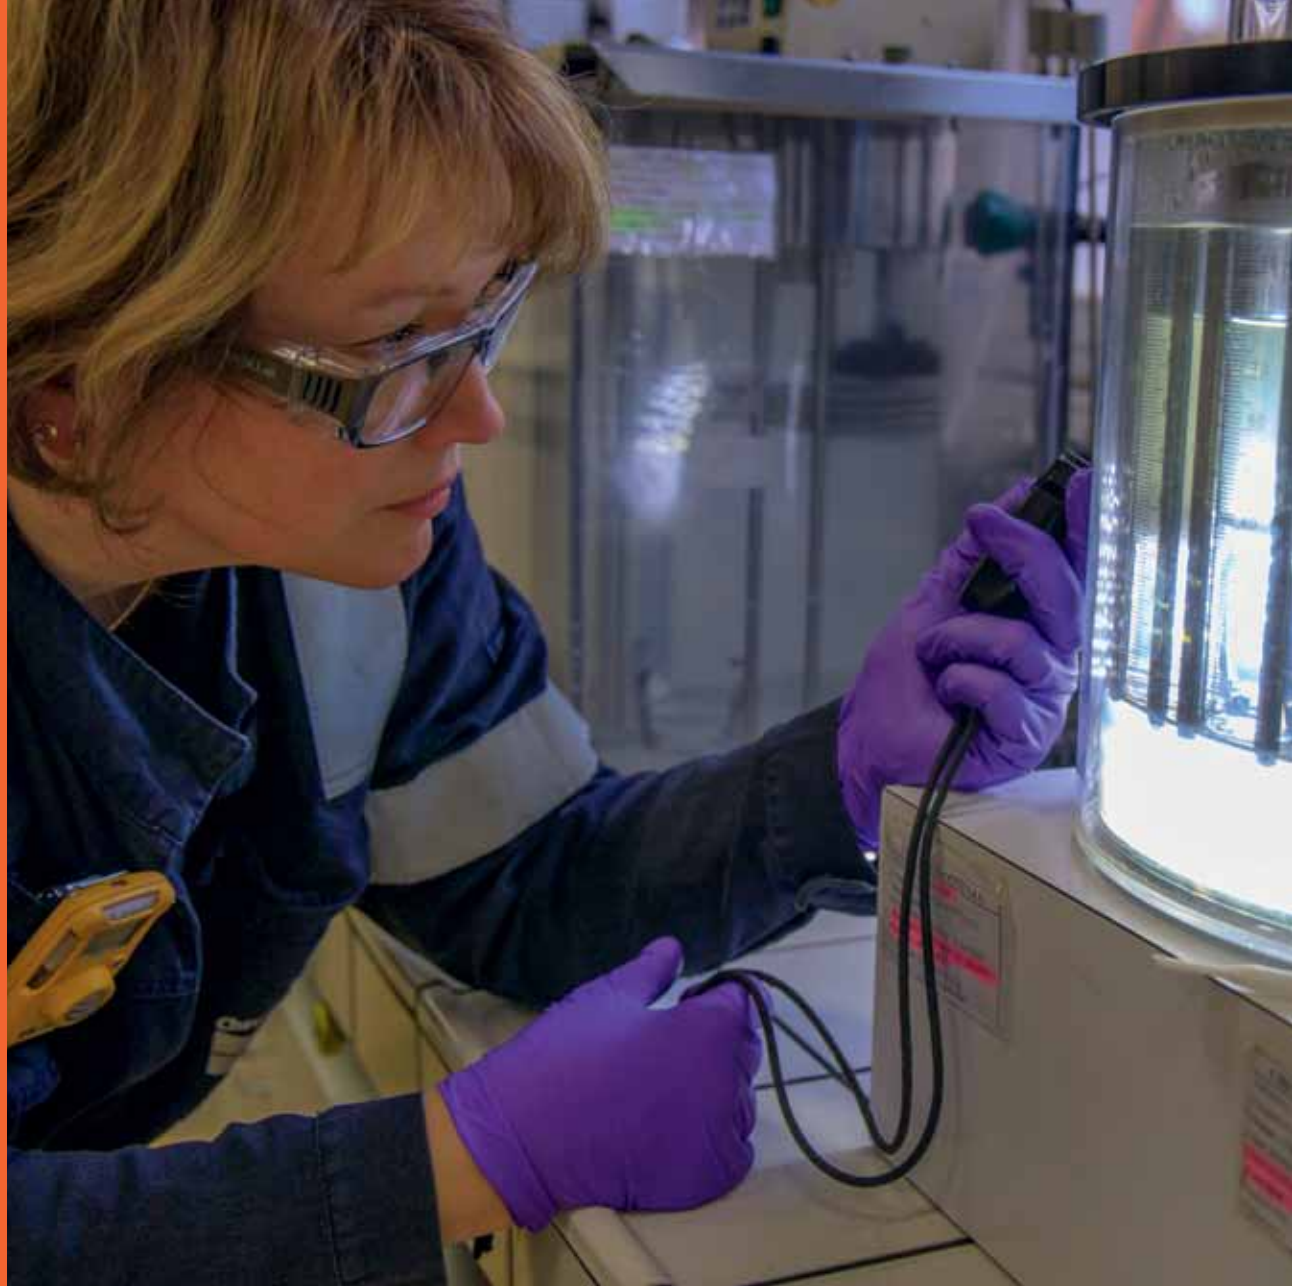

SAE J300 revised January 2015 - SAE viscosity grades for engine oils ^{(1) (2)}



SAE Viscosity Grade	Low-Temperature (°C) Cranking Viscosity ⁽³⁾ , (mPa.s)	Low-Temperature (°C) Pumping Viscosity, (mPa.s, with No Yield Stress) ⁽⁴⁾	Low-Shear-Rate Kinematic Viscosity ⁽⁵⁾ , (mm²/s) at 100°C	Low-Shear-Rate Kinematic Viscosity ⁽⁵⁾ , (mm²/s) at 100°C	High-Shear-Rate Viscosity ⁽⁶⁾ , (mPa.s) at 150°C
	Max.	Max.	Min.	Max.	Min.
0W	6200 at -35	60 000 at -40	3.8	-	-
5W	6600 at -30	60 000 at -35	3.8	-	-
10W	7000 at -25	60 000 at -30	4.1	-	-
15W	7000 at -20	60 000 at -25	5.6	-	-
20W	9500 at -15	60 000 at -20	5.6	-	-
25W	13000 at -10	60 000 at -15	9.3	-	-
8	-	-	4.0	<6.1	1.7
12	-	-	5.0	<7.1	2.0
16	-	-	6.1	<8.2	2.3
20	-	-	6.9	<9.3	2.6
30	-	-	9.3	<12.5	2.9
40	-	-	12.5	<16.3	3.5 (0W-40, 5W-40, 10W-40)
40	-	-	12.5	<16.3	3.7 (15W-40, 20W-40, 25W-40, 40)
50	-	-	16.3	<21.9	3.7
60	-	-	21.9	<26.1	3.7

Notes:

(1) 1 mPa.s = 1 cP; 1 mm²/s = 1 cSt

(2) All values, with the exception of the low-temperature cranking viscosity, are critical specifications as defined by ASTM D3244.

(3) ASTM D5293: Cranking viscosity - The non-critical specification protocol in ASTM D3244 shall be applied with a P value of 0.95.

(4) ASTM D4684: Note that the presence of any yield stress detectable by this method constitutes a failure regardless of viscosity.

(5) ASTM D445.

(6) ASTM D4683, ASTM D4741, ASTM D5481, or CEC L-036-90.

**API and
ILSAC
requirements
for gasoline
and diesel
engine oils**



API “S” and ILSAC gasoline service categories engine and laboratory test requirement summary - Current -



API CATEGORY	SJ	SL	SM	SN (SN PLUS)	SN (SN PLUS) + RC	SP	SP + RC	ILSAC STANDARD	GF-5	GF-6
SAE Viscosity grades	All							SAE Viscosity grades	0W-xx, 5W-xx, 10W-xx	0W-xx, 5W-xx, 10W-xx
L-38	X or Seq VIII	-	-	-	-	-	-	CRC L-38	-	-
Ball rust test	X ⁽⁵⁾ or Seq IID	X ⁽⁵⁾	X ⁽⁵⁾	X ⁽⁵⁾	X ⁽⁵⁾	X ⁽⁵⁾	X ⁽⁵⁾	Ball rust test	X	X
Sequence II	IID or BRT ⁽⁵⁾	-	-	-	-	-	-	Sequence II	-	-
Sequence III	IIIE or IIIF or IIIG ⁽⁸⁾⁽⁹⁾ or IIIH ⁽¹²⁾	IIIF or IIIG ⁽⁹⁾ or IIIH ⁽¹³⁾	IIIG + IIIGA ⁽¹⁾ or IIIH + ROBO	IIIG (or IIIH) + (IIIGA or ROBO) ⁽³⁾	IIIG + IIIGB + (IIIGA or ROBO), or IIIH + ROBO + IIHIB	IIIH + (IIIIHA or ROBO)	IIIH + (IIIIHA or ROBO) + IIHIB	Sequence III	IIIG + IIIGB + (IIIGA or ROBO), or IIIH + ROBO + IIHIB	IIIH + IIIHA + IIHIB
Sequence IV	-	IVA	IVA	IVA	IVA	IVB	IVB	Sequence IV	IVA	IVB
Sequence V	VE or IVA + VG (or VH) ⁽⁵⁾	VG or VH ⁽⁵⁾	VG or VH ⁽⁵⁾	VG or VH ⁽⁵⁾	VG or VH ⁽⁵⁾	VH	VH	Sequence V	VG or VH	VH
Sequence VI	-	-	-	-	VID or VIE or VIF ⁽⁷⁾	-	VIE or VIF	Sequence VI	VID or VIE	VIE
Sequence VIII	X or L-38	X	X	X	X	X	X	Sequence VIII	X	X
Sequence IX	-	-	-	X ⁽¹⁰⁾	X ⁽¹⁰⁾	X	X	Sequence IX	-	X
Sequence X	-	-	-	-	-	X	X	Sequence X	-	X
Viscometrics	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	Viscometrics	SAE J300	SAE J300
Volatility	X	X	X	X	X	X	X	Volatility	X	X
Filterability	X	X	X	X	X	X	X	Filterability	X	X
Foaming	X	X	X	X	X	X	X	Foaming	X	X
Flash point	X	-	-	-	-	-	-	Flash Point	-	-
Homog. & miscibility	X	X	X	X	X	X	X ^X	Homog. & miscibility	X	X
TEOST	TEOST 33	TEOST MHT	TEOST MHT ⁽⁶⁾	TEOST MHT ⁽⁶⁾	TEOST 33C ⁽⁴⁾ & MHT ⁽⁸⁾	-	TEOST 33C ⁽⁴⁾	TEOST	TEOST 33C ⁽⁴⁾ & MHT	TEOST 33C ⁽⁴⁾
Gelation index	X	X	X	X ⁽⁵⁾	X ⁽⁵⁾	X ⁽⁵⁾	X ⁽⁵⁾	Gelation index	X	X
Shear stability	X	X	X	X	X	X	X	Shear stability	X	X
ROBO Test	-	-	-	X or IIIGA ⁽³⁾	X or IIIGA	X or IIIHA ⁽³⁾	X or IIIHA ⁽³⁾	ROBO test	X or IIIGA	X or IIIHA ⁽³⁾
Catalyst compatibility	X	X	X	X ⁽⁶⁾	X ⁽⁶⁾	X ⁽⁶⁾	X ⁽⁶⁾	Catalyst compatibility	X	X
Emulsion retention	-	-	-	-	X	-	X	Emulsion retention	X	X
Elastomer compatibility	-	-	-	X	X	X	X	Elastomer compatibility	X	X
Phosphorus retention	-	-	-	-	X	-	X	Phosphorus retention	X	X
HTHS viscosity, 150°C	X ⁽¹⁰⁾	X ⁽¹⁰⁾	X ⁽¹⁰⁾	X ⁽¹⁰⁾	X ⁽¹⁰⁾	X ⁽¹⁰⁾	X ⁽¹⁰⁾			

Notes:

- (1) IIIGA required only for SAE grades 0W-20, 5W-20, 0W-30, 5W-30 and 10W-30.
- (2) VE not required for oils containing a minimum of 0.08% phosphorus in the form of zinc dialkylidithiophosphates (ZDDP).
- (3) Not required for monograde and 15W, 20W and 25W multigrade oils.
- (4) Not required for 0W-20 and 0W-16.
- (5) If CI-4, CJ-4, CK-4 and/or FA-4 categories precede the “S” category and there is no API Certification Mark, the Sequence VG (ASTM D 6593), Ball Rust Test (ASTM D 6557), and Gelation Index (ASTM D5133) tests are not required.
- (6) For all viscosity grades: if CF-4, CG-4 and/or CI-4 categories precede the “S” category and there is no API Certification Mark, the limits for phosphorus, sulfur and the TEOST MHT do not apply.
Note that these oils have been formulated primarily for diesel engines and may not provide all of the performance requirements consistent with vehicle manufacturers’ recommendations for gasoline-fueled engines.

- (7) Viscosity grades are limited to 0W, 5W and 10W multigrade oils.
- (8) For oils containing less than 0.08 % phosphorus, in the form of ZDDP, the Sequence IIIF plus Sequence VE test is allowed as an alternative to Sequence IIIE.
- (9) For oils with ≥ 0.06 mass % and < 0.08 % phosphorus, in the form of ZDDP, the Sequence IIIG test is allowed as an alternative to Sequence IIIF plus Sequence VE.
- (10) Not required for some viscosity grades.
- (11) Required only for oils claiming to meet API SN with SN PLUS or API SN with SN PLUS and Resource Conserving.

API “S” and ILSAC gasoline service categories engine and laboratory test requirement summary - Obsolete -



API CATEGORY	SE	SF	SG	SH
SAE Viscosity grades	All			
CRC L-38	X	X	X	X or Seq VIII
Ball rust test	-	-	-	X or Seq IID
Sequence II	IID	IID	IID	IID or BRT
Sequence III	IIID	IIID	IIIE	IIIE ⁽²⁾ or IIIF ⁽²⁾ or IIIG ⁽³⁾
Sequence IV	-	-	-	-
Sequence V	VD	VD	VE	VE or IVA + VG
Sequence VI	-	-	-	-
Sequence VIII	-	-	-	X or L-38
Caterpillar	-	-	1H2	
Ford Falcon	-	-	-	
Viscometrics	SAE J 300	SAE J 300	SAE J 300	SAE J300
Volatility	-	-	-	X
Filterability	-	-	-	X
Foaming	-	-	-	X
Flash point	-	-	-	X
Homog. & miscibility	-	-	-	X
TEOST	-	-	-	-
Gelation index	-	-	-	-
Shear stability	-	-	-	X
Catalyst compatibility	-	-	-	X

ILSAC STANDARD	GF-1	GF-2	GF-3	GF-4
SAE Viscosity grades	OW-xx, 5W-xx, 10W-xx			
CRC L-38	X	X	-	-
Ball rust test	-	-	X	X
Sequence II	IID	IID	-	-
Sequence III	IIIE	IIIE	IIIF	IIIG + IIIGA
Sequence IV	-	-	IVA	IVA
Sequence V	VE	VE	VE ⁽³⁾ + VG	VG
Sequence VI	VI	VIA	VIB	VIB
Sequence VIII	-	-	X	X
Caterpillar	-	-	-	-
Ford Falcon	-	-	-	-
Viscometrics	SAE J 300	SAE J 300	SAE J 300	SAE J300
Volatility	X	X	X	X
Filterability	X	X	X	X
Foaming	X	X	X	X
Flash point	X	X	-	-
Homog. & miscibility	X	X	X	X
TEOST	-	33C	MHT	MHT
Gelation index	-	X	X	X
Shear stability	X	X	X	X
Catalyst compatibility	X	X	X	X

Notes:

(1) Not required for oils containing a minimum of 0.08% mass phosphorus in the form of Zinc dialkyldithiophosphates (ZDDP).

(2) For oils containing less than 0.08% phosphorus, in the form of ZDDP, the Sequence IIIF plus Sequence VE test is allowed as an alternative to Sequence IIIE.

(3) For oils with ≥ 0.06 mass% and <0.08% phosphorus, in the form of ZDDP, the Sequence IIIG test is allowed as an alternative to Sequence IIIF plus Sequence VE.

API SM, SN, SN + RC gasoline service category laboratory test limits

- 1 -



API CATEGORY	SM		SN (SN PLUS)		SN (SN PLUS) + RC	SP		SP + RC
SAE Viscosity grades	0W-20/30 , 5W-20/30, 10W-30	Other grades	0W-16/20/30 , 5W-16/20/30, 10W-30	Other grades	All Viscosity grades	0W-16/20/30 , 5W-16/20/30, 10W-30	Other grades	All Viscosity grades
Laboratory test requirements								
Kinematic viscosity at 100°C (ASTM D445), cSt.	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
HTHS viscosity (ASTM D4683, D4741, or D5481), mPas, min.	SAE J300	2.6	2.3	2.6	2.3	2.3	2.3	2.3
Low temperature cranking viscosity (ASTM D5293), cP at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
Pumpability (ASTM D4684), 60000 cP max./ no yield stress at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
NOACK volatility (ASTM D5800), % loss at 250°C, max.	15 ⁽¹⁾	15 ⁽¹⁾	15 ⁽¹⁾	15 ⁽¹⁾	15 ⁽¹⁾	15 ⁽¹⁾	15 ⁽¹⁾	15 ⁽¹⁾
Volatility loss at 371°C (ASTM D6417), %, max.	10	10	10	10	10	10	10	10
Filterability , % flow reduction, max.								
EOFT (ASTM D6795)	50	50	50	50	50	50	50	50
EOWTT (ASTM D6794), with 0.6, 1.0, 2.0, 3.0% H ₂ O.	50	50	50	50	50	50	50	50
Phosphorus (ASTM D4951), % m/m, max. ^{(3) (4)}	0.08	-	0.08	-	0.08	0.08	-	0.08
Phosphorus (ASTM D4951), % m/m, min. ^{(3) (4)}	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
Sulfur (ASTM D4951 or D2622), sulfur, % m/m, max. ^{(3) (4)}	0.5 / 0.7 ⁽¹³⁾	-	0.5 / 0.6 ⁽¹³⁾	-	0.5 ⁽⁶⁾ / 0.6 ⁽¹⁷⁾	0.5 / 0.6 ⁽¹³⁾	-	0.5 ⁽⁶⁾ / 0.6 ⁽¹⁷⁾
Sequence IIGA (ASTM D4684), aged oil low temperature viscosity or ROBO Test (ASTM D7528), aged oil low temperature viscosity ^{(10) (12)}	Pass	-	Pass	Pass ⁽¹⁰⁾	Pass	Pass	Pass ⁽¹⁰⁾	Pass
Foaming tendency option A (ASTM D892), ml, max., foaming/settling								
Sequence I	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁶⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁶⁾	10 / 0 ⁽⁶⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁶⁾
Sequence II	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁶⁾	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁶⁾	50 / 0 ⁽⁶⁾	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁶⁾
Sequence III	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁶⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁶⁾	10 / 0 ⁽⁶⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁶⁾
High temperature foaming (option A) (ASTM D6082), max.	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾
Homogeneity and miscibility (ASTM D6922).	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾
TEOST MHT (ASTM D7097), high temperature deposits, mg deposit, max. ⁽³⁾	35	45	35	45	35	-	-	-
Ball rust test (ASTM D6557), avg. grey value, min.	100	100	100 ⁽¹⁴⁾	100 ⁽¹⁴⁾	100 ⁽¹⁴⁾	100 ⁽¹⁴⁾	100 ⁽¹⁴⁾	100 ⁽¹⁴⁾
Phosphorus retention (Sequence IIIGB/IIHIB) (ASTM D7320/D8111), min, %	-	-	-	-	79/81	-	-	81
TEOST 33 (ASTM D6335), total deposit weight, mg, max.	-	-	-	-	30 ⁽²⁾	-	-	30 ⁽²⁾

API SM, SN, SN + RC gasoline service category laboratory test limits

- 2 -



API CATEGORY	SM		SN (SN PLUS)		SN (SN PLUS) + RC	SP		SP + RC
SAE Viscosity grades	0W-20/30 , 5W-20/30, 10W-30	Other grades	0W-16/20/30 , 5W-16/20/30, 10W-30	Other grades	All Viscosity grades	0W-16/20/30 , 5W-16/20/30, 10W-30	Other grades	All Viscosity grades
Laboratory test requirements								
Gelation index (ASTM D5133), max. ⁽¹⁴⁾	12 ⁽⁸⁾	-	12 ⁽⁸⁾	-	12 ⁽⁸⁾	12 ⁽⁸⁾	-	12 ⁽⁸⁾
Shear stability (Seq VIII) (ASTM D6709).	Pass ^{(9) (18)}	Pass ^{(9) (18)}	Pass ^{(9) (18)}	Pass ^{(9) (18)}	Pass ^{(9) (18)}	Pass ^{(9) (18)}	Pass ^{(9) (18)}	Pass ^{(9) (18)}
Emulsion retention (ASTM D7563) : Oil mixed with 10% Water, 10 % E85 0°C, 24 Hrs. 25°C, 24 Hrs.	- -	- -	- -	- -	No water separation No water separation	- -	- -	No water separation No water separation
Elastomer compatibility (ASTM D7216) ⁽¹⁵⁾	-	-	Pass	Pass	Pass	Pass	Pass	Pass

Notes:

- (1) Calculated conversions specified in ASTM D5800 are allowed.
- (2) Not required for SAE XW-16 or XW-20.
- (3) For all viscosity grades: If CH-4, CI-4 and/or CJ-4 categories precede the "S" category and there is no API Certification Mark, the limits for phosphorus, sulfur and the TEOST MHT do not apply. However, the CJ-4 limits for phosphorus and sulfur do apply for CJ-4 oils. This footnote cannot be applied if CK-4 or FA-4 is also claimed. Note that these "C" category oils have been formulated primarily for diesel engines and may not provide all of the performance requirements consistent with vehicle manufacturers' recommendations for gasoline-fueled engines.
- (4) This is a non critical specification as described in ASTM D3244.
- (5) Settling volume determined at 10 minutes.
- (6) Settling volume determined at 1 minute.
- (7) Shall remain homogeneous and, when mixed with ASTM reference oils, shall remain miscible.
- (8) To be evaluated from -5°C to temperature at which 40,000 cP is attained or -40°C, or 2°Celsius below the appropriate MRV TP-1 temperature (defined by SAE J 300), whichever occurs first.
- (9) 10-h stripped Kinematic viscosity at 100°C must remain in original SAE grade.
- (10) Not required for monograde and 15W, 20W and 25W multigrade oils.
- (11) If CCS viscosity measured is less than or equal to the maximum CCS viscosity specified for the original viscosity grade, run ASTM D4684 (MRV TP-1) at the MRV temperature specified in SAE J300 for the original viscosity grade.
- (12) If CCS viscosity measured is higher than the maximum viscosity specified for the original viscosity grade in SAEJ300, run ASTM D4684(MRV TP-1) at 5 °C higher temperature (i.e., at MRV temperature specified in SAE J300 for the next higher viscosity grade)
- (13) For SAE 10W-30.
- (14) If CI-4, CJ-4, CK-4 and/or FA-4 categories precede the "S" category and there is no API Certification Mark, the Sequence VG (ASTM D 6593), Ball Rust Test (ASTM D 6557), and Gelation Index (ASTM D5133) tests are not required.
- (15) Please refer to chapter "Elastomer Compatibility" for limits.
- (16) For SAE 0W-20/30, 5W-20/30 viscosity grades.
- (17) For all viscosity grades other than SAEs 0W-20/30, 5W-20/30.
- (18) Data to support stay-in-grade requirement for read-across shall be supported by ASTM D6278 (30 passes). The following limits for kinematic viscosity at 100°C after shear must be met: xW-16 $\geq$ 5.8 mm²/s / xW-20 $\geq$ 6.5 mm²/s / xW-30 $\geq$ 8.5 mm²/s / xW-40 $\geq$ 11.5 mm²/s / xW-50 $\geq$ 15.0 mm²/s / xW-60 $\geq$ 19.8 mm²/s.

API SH, SJ and SL gasoline service category laboratory test limits

- 1 -



API CATEGORY	SH ⁽⁹⁾			SJ		SL	
SAE Viscosity grades	5W-30	10W-30	15W-40	0W-20, 5W-20, 5W-30, 10W-30	Other grades ⁽¹⁴⁾	0W-20, 0W-30, 5W-20, 5W-30, 10W-30	Other grades ⁽¹⁴⁾
Laboratory test requirements							
Kinematic viscosity at 100°C (ASTM D445), mm ² /s.	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
HTHS viscosity (ASTM D4683), mPa.s, min.	SAE J300	SAE J300	SAE J300	SAE J300	2.6	SAE J300	2.6
Low temperature cranking viscosity (ASTM D5293), mPa.s at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
Pumpability (ASTM D4684), 60000 mPa.s max./ no yield stress at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
NOACK volatility (ASTM D5800), % loss at 250°C, max.	25 ⁽¹¹⁾	20 ⁽¹¹⁾	18 ⁽¹¹⁾	22 ⁽²⁾	20 ⁽¹⁾	15	15
Volatility loss at 371°C (ASTM D6417), %, max.	20 ⁽¹¹⁾	17 ⁽¹¹⁾	15 ⁽¹¹⁾	-	-	-	-
Volatility loss at 371°C (ASTM D6417or ASTM D5480), %, max.	-	-	-	17 ⁽²⁾	15 ⁽¹⁾	10	10
Filterability , % flow reduction, max.							
EOFT (ASTM D6795)	50	50	-	50	50	50	50
EOWTT (ASTM D6794), with 0.6, 1.0, 2.0, 3.0% H ₂ O.	-	-	-	Report	Report	50	50
Phosphorus (ASTM D4951 or D5185), % m/m, max.	0.12	0.12	-	0.10 ⁽³⁾	-	0.10 ^{(3) (8)}	-
Phosphorus (ASTM D4951 or D5185), % m/m, min.	0.06	0.06	0.06	0.06 ⁽¹³⁾	0.06 ⁽¹³⁾	0.06 ⁽¹³⁾	0.06 ⁽¹³⁾
Foaming tendency option A (ASTM D892), ml, max., foaming/ settling							
Sequence I	10 / 0 ⁽¹²⁾	10 / 0 ⁽¹²⁾	10 / 0 ⁽¹²⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾
Sequence II	50 / 0 ⁽¹²⁾	50 / 0 ⁽¹²⁾	50 / 0 ⁽¹²⁾	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁵⁾
Sequence III	10 / 0 ⁽¹²⁾	10 / 0 ⁽¹²⁾	10 / 0 ⁽¹²⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾
High temperature foaming optional blending (ASTM D6082), ml, max., foaming/ settling	Report ⁽⁴⁾	Report ⁽⁴⁾	Report ⁽⁴⁾	200 / 50 ⁽⁶⁾	200 / 50 ⁽⁶⁾	100 / 0 ⁽⁶⁾	100 / 0 ⁽⁶⁾
Homogeneity and miscibility (ASTM D6922)	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾
TEOST 33 (ASTM D6335), total deposit weight, mg, max.	-	-	-	60	60	-	-

API SH, SJ and SL gasoline service category laboratory test limits

- 2 -



Oronite

API CATEGORY	SH ⁽⁹⁾			SJ		SL	
SAE Viscosity grades	5W-30	10W-30	15W-40	0W-20, 5W-20, 5W-30, 10W-30	Other grades ⁽¹⁴⁾	0W-20, 0W-30, 5W-20, 5W-30, 10W-30	Other grades ⁽¹⁴⁾
Laboratory test requirements							
TEOST MHT (ASTM D7097), high temperature deposits, mg deposit, max.	-	-	-	-	-	45	45
Gelation index (ASTM D5133), max.	-	-	-	12 ⁽¹⁵⁾	-	12 ⁽¹⁵⁾	-
Shear stability (Seq VIII) (ASTM D6709)	-	-	-	Pass ⁽¹⁶⁾ (17)	Pass ⁽¹⁶⁾ (17)	Pass ⁽¹⁶⁾ (17)	Pass ⁽¹⁶⁾ (17)
Flash point (ASTM D92) ⁽¹⁰⁾ , °C, min.	200	205	215	200	-	-	-
Flash point (ASTM D93) ⁽¹⁰⁾ , °C, min.	185	190	200	185	-	-	-
Ball rust test (ASTM D6557), avg. grey value, min.	-	-	-	100 ⁽¹⁵⁾	100 ⁽¹⁵⁾	100 ⁽¹⁵⁾	100 ⁽¹⁵⁾

Notes:

- (1) Only required for 15W-40 oils.
- (2) Meet the volatility requirement in either Test Method D5800, D5480, or D6417.
- (3) This is a non critical specification as described in ASTM D3244.
- (4) Report kinetic foam volume (ml), static foam volume (ml) and collapse time (s).
- (5) Settling volume determined at 10 minutes.
- (6) Settling volume determined at 1 minute.
- (7) Shall remain homogeneous and, when mixed with ASTM reference oils, shall remain miscible.
- (8) For all viscosity grades: if CF-4, CG-4 and/or CI-4 categories precede the "S" category and there is no API Certification Mark, the limits for phosphorus do not apply. However, the CJ-4 limits for phosphorus and sulfur do apply for CJ-4 oils. This footnote cannot be applied if CK-4 or FA-4 is also claimed. Note that these "C" category oils have been formulated primarily for diesel engines and may not provide all of the performance requirements consistent with vehicle manufacturers' recommendations for gasoline-fueled engines.
- (9) There are no bench tests and measured parameter requirements for other viscosity grades. Only the most recent edition of SAE J300 requirements have to be met on all oils.
- (10) Meet either Test Method D92 or D93 flash point requirement.
- (11) Meet either Test Method D5800 or D2687 volatility requirement.
- (12) Settling volume determined at 5 minutes.
- (13) Not required if passing Sequence VE (ASTM D5302) results are obtained.
- (14) Does not include 0W-16 and 5W-16.
- (15) If CI-4, CJ-4, CK-4 and/or FA-4 categories precede the "S" category and there is no API Certification Mark, the Sequence VG (ASTM D6593), Ball Rust Test (ASTM D6557), and Gelation Index (ASTM D5133) tests are not required.
- (16) 10-h stripped Kinematic viscosity at 100°C must remain in original SAE grade.
- (17) Data to support stay-in-grade requirement for read-across shall be supported by ASTM D6278 (30 passes). The following limits for kinematic viscosity at 100°C after shear must be met: xW-20 $\geq$ 6.5 mm²/s / xW-30 $\geq$ 8.5 mm²/s / xW-40 $\geq$ 11.5 mm²/s / xW-50 $\geq$ 15.0 mm²/s / xW-60 $\geq$ 19.8 mm²/s.

API “S” gasoline service categories engine test limits

- 1 -



API CATEGORY	(SE)	(SF)	(SG)	SH ⁽¹⁾ (6)	SJ ⁽¹⁾	SL	SM	SN (SN PLUS)	SN (SN PLUS) + RC				SP	SP + RC			
SAE Viscosity grades	All	All	All	All	All	All	All	All	xW-16	xW-20	xW-30	10W-30 & other grades	All	xW-16	xW-20	xW-30	10W-30 & other grades
CRC L-38 (ASTM D5119)																	
Bearing weight loss, mg, max.	40	40	40	40	40	-	-	-	-	-	-	-	-	-	-	-	-
Piston skirt varnish, min.	-	-	9.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
10 h. stripped viscosity	-	-	-	Stay in grade	Stay in grade	-	-	-	-	-	-	-	-	-	-	-	-
Sequence VIII (ASTM D6709)																	
Bearing weight loss, mg, max.	-	-	-	26.4 ⁽⁹⁾	26.4 ⁽⁹⁾	26.4	26	26	26	26	26	26	26 ⁽¹⁶⁾	26 ⁽¹⁶⁾	26	26	26 ⁽¹⁶⁾
10 h. stripped viscosity	-	-	-	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ⁽¹¹⁾	Stay in grade ^{(11) (16)}	Stay in grade ^{(11) (16)}	Stay in grade ^{(11) (16)}	Stay in grade ^{(11) (16)}	Stay in grade ^{(11) (16)}
Sequence IID (ASTM D5844)																	
Average engine rust, min.	8.5	8.5	8.5	8.5	8.5	-	-	-	-	-	-	-	-	-	-	-	-
Lifter sticking, max.	none	none	none	none	none	-	-	-	-	-	-	-	-	-	-	-	-
Sequence IIID, IIIE, IIIF ⁽³⁾, IIIG, IIHH (ASTM D5533, D6984, D7320, D8111)	IIID	IIID	IIIE	IIIE/IIIF/IIIG	IIIE/IIIF ⁽³⁾/IIIG	IIIF ⁽³⁾/IIIG/IIHH	IIIG + IIIGA ⁽⁸⁾/IIHH + IIHA	IIIG + IIIG ⁽⁸⁾/IIHH	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB	IIIG + IIIGA ⁽⁸⁾ + IIIGB/IIHH + IIHBB
Viscosity increase at 40°C, %, max.	375 at 40 h.	375 at 64 h.	375 at 64 h.	-/325 ⁽¹⁰⁾ /150	-/325 ⁽¹⁰⁾ /150/307 ⁽¹⁴⁾	275 at 80 h./150 at 100 h./181 ⁽¹⁵⁾	150 at 100 h./150	150 at 100 h.	150 at 100 h./150	150 at 100 h./150	150 at 100 h./150	150 at 100 h./150	100	100	100	100	100
Hours to 375 % vis. inc. at 40°C, min.	-	-	-	64/-/-	64/-/-/-	-	-	-	-	-	-	-	-	-	-	-	-
Average engine sludge, min.	9.2	9.2	9.2	9.2/-/-	9.2/-/-/-	-	-	-	-	-	-	-	-	-	-	-	-
Average piston skirt varnish, min.	9.1	9.2	8.9	8.9/8.5 ⁽¹³⁾ /-	8.9/8.5 ⁽¹³⁾ /7.5 ⁽¹⁴⁾	9.0/-/7.9 ⁽¹⁵⁾	-	-	-	-	-	-	-	-	-	-	-
Average oil ring land deposits, min.	4.0	4.8	3.5	3.5/-/-	3.5/-/-/-	-	-	-	-	-	-	-	-	-	-	-	-
Weighted piston deposits, min.	-	-	-	-/3.2 ⁽¹³⁾ /3.5	-/3.2 ⁽¹³⁾ /3.5/2.5 ⁽¹⁴⁾	4.0/3.5/3.3 ⁽¹⁵⁾	3.5/3.2	4.0/3.7	4.0/3.7	4.0/3.7	4.0/3.7	4.0/3.7	4.2	4.2	4.2	4.2	4.2
Ring sticking (hot stuck)	None	None	None	None ⁽²⁾ ⁽¹³⁾	None ⁽²⁾ ⁽¹³⁾	None	None	None	None	None	None	None	None	None	None	None	None
Lifter sticking	None	None	None	None/-/-	None/-/-/-	-	-	-	-	-	-	-	-	-	-	-	-
Cam or lifter scuffing	None	None	None	None/-/-	None/-/-/-	-	-	-	-	-	-	-	-	-	-	-	-
Maximum cam + lifter wear, μm (in.), max.	254 (0.0100)	203 (0.0080)	64 (0.0025)	64 (0.0025)/-/-	64 (0.0025)/-/-/-	-	-	-	-	-	-	-	-	-	-	-	-
Average cam + lifter wear, μm (in.), max.	102 (0.0040)	102 (0.0040)	30 (0.0012)	30 (0.0012)/20 ⁽¹²⁾ /60	30 (0.0012)/20 ⁽¹²⁾ /60/-	20 ⁽¹²⁾ /60/-	60/-	-	-	-	-	-	-	-	-	-	-

API “S” gasoline service categories engine test limits

- 2 -



API CATEGORY	(SE)	(SF)	(SG)	SH ⁽¹⁾ (6)	SJ ⁽⁷⁾	SL	SM	SN (SN PLUS)	SN (SN PLUS) + RC				SP	SP + RC			
SAE Viscosity grades	All	All	All	All	All	All	All	All	xW-16	xW-20	xW-30	10W-30 & other grades	All	xW-16	xW-20	xW-30	10W-30 & other grades
Low temperature Viscosity	-	-	-	-	-	Report ⁽⁴⁾ /Report ⁽⁵⁾ /-	Pass ⁽⁵⁾	Pass ⁽⁵⁾	Pass ⁽⁵⁾				Pass	Pass			
Phosphorus retention, %, min.	-	-	-	-	-	-	-	-	79 ⁽⁷⁾ /81				-	81			
Sequence VID, VIE, VIF (ASTM D7589, D8114, D8226)									VID/ VIF	VID/VIE				VIF	VIE		
FEI 2, %, min.	-	-	-	-	-	-	-	-	1.3/1.8	1.2/1.5	0.9/1.2	0.6/1.0	-	1.9	1.8	1.5	1.3
Sum of FEI, %, min.	-	-	-	-	-	-	-	-	2.8/3.7	2.6/3.2	1.9/2.5	1.5/2.2	-	4.1	3.8	3.1	2.8

Notes:

- (1) Alternative engine tests may be run instead of those presented as described in ASTM letter of April 28, 2000. Ball Rust Test instead of Sequence IID; Sequence IVA plus Sequence VG instead of Sequence VE; Sequence VIII instead of CRC L-38; Sequence IIIF as an alternative to Sequence IIIE (See ASTM D4485 -11c for limits of these alternative engine tests).
- (2) For IIIE in SH/SJ, an oil related stuck ring occurs on a piston with an individual oil ring land deposit rating < 2.6.
- (3) Oil consumption is no longer a pass/fail limit. The test is invalid if oil consumption is ≥ 5.2 L and Noack Volatility is $\geq 15\%$ or oil consumption is ≥ 6.5 L and Noack Volatility is $> 15\%$.
- (4) Evaluate the 80-hour test oil sample by ASTM Test Method D4684 (MRV TP-1) at the temperature indicated by the low temperature grade of oil as determined on the 80-hour sample by ASTM Test Method D5293 (CCS Viscosity).
- (5) The ASTM Test Method D4684 (MRV TP-1) result on the 100-hour end of test sample must meet the requirements of the original grade or the next higher grade at the SAE J 300 temperature.
- (6) API SH may only be licensed if it is preceded by a "C" category in the Service symbol.
- (7) API SN + Resource Conserving Sequence IIIGB (ASTM D7320).
- (8) A Sequence IIIGA test is identical to a Sequence IIIG test, except only low temperature viscosity performance is measured.
- (9) Alternative for CRC L-38.
- (10) For IIIF in SH/SJ, determine viscosity increase at 40°C at 60h.
- (11) Data to support stay-in-grade requirement for read-across shall be supported by ASTM D6278 (30 passes). The following limits for kinematic viscosity at 100°C after shear must be met:
 $xW-20 \geq 5.6 \text{ mm}^2/\text{s}$ / $xW-30 \geq 8.5 \text{ mm}^2/\text{s}$ / $xW-40 \geq 11.5 \text{ mm}^2/\text{s}$ / $xW-50 \geq 15.0 \text{ mm}^2/\text{s}$.
- (12) Calculate by eliminating the highest and lowest cam-plus-lifter wear results and then calculating an average based on the remaining ten rating positions. For SH and SJ, determine at 80 h.
- (13) For IIIF in SH/SJ, determine at 80 h.
- (14) Kinematic viscosity at 60 hours and weighted piston deposit and piston skirt varnish at 70 hours.
- (15) Kinematic viscosity, weighted piston deposit and piston skirt varnish at 70 hours.
- (16) Sequence VIII bearing weight loss and shear stability not required for SAE XW-16.

API “S” gasoline service categories engine test limits

- 3 -



API CATEGORY	(SE)	(SF)	(SG)	SH ⁽¹⁾	SJ ⁽¹⁾	SL		SM	SN (SN PLUS)	SN (SN PLUS) + RC	SP	SP + RC
SAE Viscosity grades	All	All	All	All	All	All		All	All	All	All	All
Sequence IVA (ASTM D6891)												
Cam wear avg, µm, max.	-	-	-	120 ⁽⁴⁾	120 ⁽⁴⁾	120		90	90	90	-	-
Sequence IVB (ASTM DXXXX)												
Average intake lifter volume loss, mm ³ , max.	-	-	-	-	-	-		-	-	-	2.7	2.7
End of test iron, ppm, max.	-	-	-	-	-	-		-	-	-	400	400
Sequence V	VD	VD	VE	VE/VG ⁽⁴⁾	VE/VG/VH ⁽⁴⁾	VE ⁽²⁾	VG/VH	VG/VH	VG/VH	VG/VH	VH	VH
Average engine sludge, min.	9.2	9.4	9.0	9.0/7.8	9.0/7.8/7.4	-	7.8/7.4	7.8/7.4	8.0/7.6	8.0/7.6	7.6	7.6
Rocker arm cover sludge, min.	-	-	7.0	7.0/8.0	7.0/8.0/7.4	-	8.0/7.4	8.0/7.4	8.3/7.7	8.3/7.7	7.7	7.7
Average piston skirt varnish, min.	6.4	6.7	6.5	6.5/7.5	6.5/7.5/7.4	-	7.5/7.4	7.5/7.6	7.5/7.6	7.5/7.6	7.6	7.6
Average engine varnish, min.	6.3	6.6	5.0	5.0/8.9	5.0/8.9/8.6	-	8.9/8.6	8.9/8.6	8.9/8.6	8.9/8.6	8.6	8.6
Oil screen debris, %, max.	-	-	-	-	-	-	Report/-	Report/-	Report/-	Report/-	Report	Report
Oil screen clogging, %, max.	10.0	7.5	20	20/20	20/20/Report	-	20/Report	20/Report	15/Report	15/Report	Report	Report
Oil ring clogging, %, max. ⁽²⁾	10.0	10.0	15	Report	Report/Report/-	-	Report/-	Report/-	Report/-	Report/-	Report	Report
Compression ring sticking (hot stuck)	None	None	None	None/None	None	-	None	None	None	None	None	None
Cold stuck rings	-	-	-	-	-	-	Report/-	Report/-	Report/-	Report/-	Report	Report
Maximum cam wear, µm (in.), max.	Rate & Report	64 (0.0025)	380 (0.015)	380 (0.015)/-	380 (0.015)/-/-	380 ⁽³⁾	-	-	-	-	-	-
Average cam wear, µm (in.), max.	Rate & Report	25 (0.0010)	130 (0.005)	127 (0.005)/-	127 (0.005)/-/-	127 ⁽³⁾	-	-	-	-	-	-
Sequence IX (ASTM DXXXX)												
Average number of events, max.	-	-	-	-	-	-		-	5 ⁽⁵⁾	5 ⁽⁵⁾	5 ⁽⁵⁾	5 ⁽⁵⁾
Sequence X (ASTM DXXXX)												
chain stretch, % increase, max.	-	-	-	-	-	-		-	-	-	0,085	0,085

Notes:

- (1) Alternative engine tests may be run instead of those presented as described in ASTM letter of April 28, 2000. Ball Rust Test instead of Sequence IID; Sequence IVA plus Sequence VG instead of Sequence VE; Sequence VIII instead of CRC L-38; Sequence IIIF as an alternative to Sequence IIIE (See ASTM D4485 -04 for limits of these alternative engine tests).
- (2) Oil ring clogging as a pass criterion; suspended indefinitely by ASTM on June 1, 1994.
- (3) Not required for oils containing a minimum of 0.08% mass phosphorus in the form of ZDDP.
- (4) Demonstrate passing performance in Sequence VE, or alternatively, in both Sequence IVA and VG.
- (5) Required only for oils claiming to meet API SN with SN PLUS or API SN with SN PLUS and Resource Conserving.

ILSAC GF-4, GF-5 & GF-6 standard laboratory test limits

- 1 -



ILSAC STANDARD	GF-4	GF-5	GF-6
SAE Viscosity grades	0W-xx, 5W-xx, 10W-xx	0W-xx, 5W-xx, 10W-xx	0W-xx, 5W-xx, 10W-xx
Laboratory test requirements			
Kinematic viscosity at 100°C (ASTM D445), mm ² /s.	SAE J300	SAE J300	SAE J300
HTHS viscosity (ASTM D4683), mPa.s, min.	SAE J300	SAE J300	SAE J300
Low temperature cranking viscosity (ASTM D5293), mPa.s at -xx°C	SAE J300	SAE J300	SAE J300
Pumpability (ASTM D4684), 60000 mPa.s max./ no yield stress at -xx°C	SAE J300	SAE J300	SAE J300
NOACK volatility (ASTM D5800), % loss at 250°C, max.	15 ⁽²⁾	15 ⁽²⁾	15 ⁽²⁾
Volatility loss at 371°C (ASTM D6417), %, max.	10	10	10
Filterability , % flow reduction, max.			
EOFT (ASTM D6795)	50	50	50
EOWTT (ASTM D6794), with 0.6, 1.0, 2.0, 3.0% H ₂ O.	50	50	50
Phosphorus (ASTM D4951), % m/m, max. ⁽⁴⁾	0.08	0.08	0.08
Phosphorus (ASTM D4951), % m/m, min. ⁽⁴⁾	0.06	0.06	0.06
Sulfur (ASTM D4951 or D2622), sulfur, % m/m, max. ⁽⁴⁾	0.5 ⁽¹¹⁾ /0.7 ⁽¹⁵⁾	0.5 ⁽¹¹⁾ /0.6 ⁽¹⁵⁾	0.5 ⁽¹¹⁾ /0.6 ⁽¹⁵⁾
Sequence IIIGA (ASTM D4684), aged oil low temperature viscosity or ROBO Test (ASTM D7528), aged oil low temperature viscosity	-	Pass ⁽¹²⁾ ⁽¹³⁾	Pass ⁽¹²⁾ ⁽¹³⁾
Foaming tendency option A (ASTM D892), ml, max., foaming/ settling			
Sequence I	10/0 ⁽⁶⁾	10/0 ⁽⁶⁾	10/0 ⁽⁶⁾
Sequence II	50/0 ⁽⁶⁾	50/0 ⁽⁶⁾	50/0 ⁽⁶⁾
Sequence III	10/0 ⁽⁶⁾	10/0 ⁽⁶⁾	10/0 ⁽⁶⁾
High temperature foaming (option A) (ASTM D6082), max.	100/0 ⁽⁷⁾	100/0 ⁽⁷⁾	100/0 ⁽⁷⁾
Homogeneity and miscibility (ASTM D6922).	Pass ⁽⁸⁾	Pass ⁽⁸⁾	Pass ⁽⁸⁾
TEOST MHT (ASTM D7097), high temperature deposits, mg deposit, max. ⁽⁴⁾	35	35	-
Ball rust test (ASTM D6557), avg. grey value, min.	100	100	100
Phosphorus volatility (Sequence IIIGB) (ASTM D7320), min.	-	79%	81%
TEOST 33 (ASTM D6335), total deposit weight, mg, max.	-	30 ⁽³⁾	30 ⁽³⁾
Gelation index (ASTM D5133), max. ⁽⁹⁾	12 ⁽⁹⁾	12 ⁽⁹⁾	12 ⁽⁹⁾

ILSAC GF-4, GF-5 & GF-6 standard laboratory test limits

- 2 -



ILSAC STANDARD	GF-4	GF-5	GF-6
SAE Viscosity grades	0W-xx, 5W-xx, 10W-xx	0W-xx, 5W-xx, 10W-xx	0W-xx, 5W-xx, 10W-xx
Laboratory test requirements			
Shear stability (Seq VIII) (ASTM D6709).	Pass ⁽¹⁰⁾	Pass ^{(10) (14)}	Pass ^{(10) (14)}
Emulsion retention (ASTM D7563): Oil mixed with 10% Water, 10 % E85			
0°C, 24 Hrs.	-	No separation	No separation
25°C, 24 Hrs.	-	No separation	No separation
Elastomer compatibility (ASTM D7216) ^{(15)w}	-	Pass	Pass

Notes:

- (1) Please refer to chapter "Elastomer Compatibility" for limits.
- (2) Calculated conversions specified in ASTM D5800 are allowed.
- (3) No limit for 0W-20.
- (4) For all viscosity grades: if CF-4, CG-4, CH-4 and/or CI-4 categories precede the "S" category and there is no API Certification Mark, the limits for phosphorus, sulfur and the TEOST MTH do not apply. This is a non-critical specification as described in ASTM D3244.
- Note that these oils have been formulated primarily for diesel engines and may not provide all of the performance requirements consistent with vehicle manufacturers' recommendations for gasoline-fueled engines.
- (5) Test formulation with highest additive (DI/VI) concentration. R/A results to all other base oil/ viscosity grade formulations using same or lower concentration of identical additive (DI/VI) combination. Each different DI/VI combination must be tested.
- (6) Settling volume determined at 10 minutes.
- (7) Settling volume determined at 1 minute.
- (8) Shall remain homogenous and, when mixed with ASTM reference oils, shall remain miscible.
- (9) To be evaluated from -5°C to temperature at which 40.000 cP is attained or -40°C, or 2°Celsius below the appropriate MRV TP-1 temperature (defined by SAE J 300), whichever occurs first.
- (10) 10-h stripped Kinematic viscosity@100°C must remain in original SAE grade.
- (11) For 0W-xx, 5W-xx.
- (12) a) If CCS viscosity measured is less than or equal to the maximum CCS viscosity specified for the original viscosity grade, run ASTM D4684 (MRV TP-1) at the MRV temperature specified in SAE J300 for the original viscosity grade.
- b) If CCS viscosity measured is higher than the maximum viscosity specified for the original viscosity grade in SAEJ300, run ASTM D4684(MRV TP-1) at 5 °C higher temperature (i.e., at MRV temperature specified in SAE J300 for the next higher viscosity grade).
- (13) EOT ROBO or ILLGA Sample must show no yield stress in the D4684 viscosity must be below the maximum specified in SAE J300 for the original viscosity grade or the next higher viscosity grade, as outlined in (12).
- (14) Data to support stay-in-grade requirement for read-across shall be supported by ASTM D6278 (30 passes). The following limits for kinematic viscosity at 100°C after shear must be met:
xW-20 $\geq$ 5.6 mm²/s / xW-30 $\geq$ 8.5 mm²/s / xW-40 $\geq$ 11.5 mm²/s / xW-50 $\geq$ 15.0 mm²/s.
- (15) For 10W-xx.

ILSAC GF-1, GF-2 and GF-3 standard laboratory test limits



ILSAC STANDARD	GF-1		GF-2	GF-3
SAE Viscosity grades	0W-xx, 5W-xx	10W-xx	0W-xx, 5W-xx, 10W-xx	0W-xx, 5W-xx, 10W-xx
Laboratory test requirements				
Kinematic viscosity at 100°C (ASTM D445), mm ² /s.	SAE J300	SAE J300	SAE J300	SAE J300
HTHS viscosity (ASTM D4683), mPa.s, min.	SAE J300	SAE J300	SAE J300	SAE J300
Low temperature cranking viscosity (ASTM D5293), mPa.s at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300
Pumpability (ASTM D4684), 60000 mPa.s max./ no yield stress at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300
NOACK volatility (ASTM D5800) ⁽²⁾ , % loss at 250°C, max.	25 ⁽¹⁾	20 ⁽¹⁾	22	15
Volatility loss at 371°C (ASTM D6417) ⁽³⁾ , % max.	20 ⁽¹⁾	17 ⁽¹⁾	17	10
Filterability ⁽⁶⁾ , % flow reduction, max.				
EOFT (ASTM D6795)	50	50	50	50
EOWTT (ASTM D6794), with 0.6, 1.0, 2.0, 3.0% H ₂ O.	-	-	Report	50
Phosphorus (ASTM D4951 or D5185), wt %, max.	-	-	0.1	0.1
Foaming tendency option A (ASTM D892), ml, max., foaming/ settling				
Sequence I	10 / 0 ⁽⁴⁾	10 / 0 ⁽⁴⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾
Sequence II	50 / 0 ⁽³⁾	50 / 0 ⁽³⁾	50 / 0 ⁽⁵⁾	50 / 0 ⁽⁵⁾
Sequence III	10 / 0 ⁽⁴⁾	10 / 0 ⁽⁴⁾	10 / 0 ⁽⁵⁾	10 / 0 ⁽⁵⁾
High temperature foaming (option A) (ASTM D6082), max.	-	-	200 / 50 ⁽⁴⁾	100 / 0 ⁽⁴⁾
Homogeneity and miscibility (ASTM D6922).	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾	Pass ⁽⁷⁾
TEOST MHT (ASTM D7097), high temperature deposits, mg deposit, max.	-	-	-	45
Gelation index (ASTM D5133), max. ⁽⁹⁾	-	-	-	12 ⁽¹⁰⁾
TEOST 33 (ASTM D6335), total deposit weight, mg, max.	-	-	60	-
Flash point (ASTM D92) ⁽⁶⁾ , °C, min.	200	200	200	200
Flash point (ASTM D93) ⁽⁶⁾ , °C, min.	185	185	185	185

Notes:

(1) Can run either D5800 or D6417.

(2) ILSAC GF-1 requires CEC L-40-A-93 result. Test method CEC L-40-A-93 is equivalent to ASTM D5800.

(3) Settling volume determined at 5 minutes.

(4) Settling volume determined at 1 minute.

(5) Settling volume determined at 10 minutes.

(6) Meet either Test Method D92 or Test Method D93 flash point requirement.

(7) Shall remain homogenous and, when mixed with ASTM reference oils, shall remain miscible. Formerly "Federal Test Method 791B, Method 3470".

(8) Formerly known as GM 9099P.

(9) Formerly known as D2887.

(10) To be evaluated from -5°C to temperature at which 40,000 mPa.s is attained or -40°C, or 2°Celsius below the appropriate MRV TP-1 temperature (defined by SAE J 300), whichever occurs first.

ILSAC standard engine test limits

- 1 -



ILSAC STANDARD	GF-1			GF-2			GF-3			GF-4			GF-5			GF-6B	GF-6A		
SAE Viscosity grades ⁽¹⁾	OW-xx	5W-xx	10W-xx	OW-20 5W-20	Other OW-xx & 5W-xx	10W-xx	OW-20 5W-20	OW-30 5W-30	10W-xx & other grades	OW-20 5W-20	OW-30 5W-30	10W-xx & other grades	xW-20	xW-30	10W-xx & other grades	xW-16	xW-20	xW-30	10W-xx & other grades
CRC L-38 (ASTM D5119)																			
Bearing weight loss, mg, max.		40			40			-			-			-		-		-	
Piston skirt varnish, min.		9.0			-			-			-			-		-		-	
10 h stripped viscosity		Stay in grade ⁽⁶⁾			Stay in grade ⁽⁶⁾			-			-			-		-		-	
Sequence VIII (ASTM D6709)																			
Bearing weight loss, mg, max.		-			-			26.4			26			26		-		26	
10 h stripped viscosity		-			-			Stay in grade ⁽⁶⁾			Stay in grade ⁽⁶⁾			Stay in grade ⁽⁶⁾		-		Stay in grade ⁽⁶⁾	
Sequence IID (ASTM D5844)																			
Average engine rust, min.		8.5			8.5			-			-			-		-		-	
Lifter sticking, max.		none			none			-			-			-		-		-	
Sequence IIID, IIIE, IIIF, IIIG, IIHH (ASTM D5533, D6984, D7320, D8111)																			
Viscosity increase at 40°C, %, max.		375 at 64h			-			275 at 80h			150 at 100h			150 at 100h		100 at 90h		100 at 90h	
Hours to 375% vis. increase at 40°C, min.		-			64			-			-			-		-		-	
Average engine sludge, min.		9.2			9.2			-			-			-		-		-	
Average piston skirt varnish, min.		8.9			8.9			9.0			-			-		-		-	
Average oil ring land deposits, min.		3.5			3.5			-			-			-		-		-	
Weighted piston deposits, min.		-			-			4.0			3.5			4.0 / 3.7		4.2		4.2	
Ring sticking (oil related)		None ⁽²⁾			None ⁽²⁾			-			-			-		-		-	
Hot stuck piston rings								None			None			None		None		None	
Lifter sticking		None			-			-			-			-		-		-	
Cam or lifter scuffing		None			-			-			-			-		-		-	
Maximum cam + lifter wear, µm (in.), max.		64 (0.0025)			64 (0.0025)			-			-			-		-		-	
Average cam + lifter wear, µm (in.), max.		30 (0.0012)			30 (0.0012)			20			60			-		-		-	
Oil consumption, l, max.		5.1			5.1			5.2			-			-		-		-	
Low temperature viscosity		-			-			Report ⁽³⁾			Pass ⁽⁴⁾			-		-		-	

Notes:

- (1) Allowed viscosity grades for ILSAC GF-1 / GF-2 / GF-3 / GF-4 / GF-5 are limited to SAE OW-xx, 5W-xx and 10W-xx.
- (2) An oil related stuck ring occurs on a piston with an individual oil ring land deposit rating < 2.6.
- (3) Evaluate the 80-hour test oil sample by ASTM Test Method D4684 (MRV TP-1) at the temperature indicated by the low temperature grade of oil as determined on the 80-hour sample by ASTM Test Method D5293 (CCS Viscosity).
- (4) The ASTM Test Method D4684 (MRV TP-1) result on the 100-hour end of test sample must meet the requirements of the original grade or the next higher grade at the SAE J 300 temperature.

- (5) A Sequence IIIGA test is identical to a Sequence IIIG test, except only low temperature viscosity performance is measured.
- (6) Data to support stay-in-grade requirement for read-across shall be supported by ASTM D6278 (30 passes).
The following limits for kinematic viscosity at 100°C after shear must be met:
xW-20 ≥ 5.6 mm²/s / xW-30 ≥ 8.5 mm²/s / xW-40 ≥ 11.5 mm²/s / xW-50 ≥ 15.0 mm²/s.

ILSAC standard engine test limits

- 2 -



ILSAC STANDARD	GF-1			GF-2			GF-3			GF-4			GF-5			GF-6B	GF-6A		
SAE Viscosity grades ⁽¹⁾	0W-xx	5W-xx	10W-xx	0W-20 5W-20	Other 0W-xx & 5W-xx	10W-xx	0W-20 5W-20	0W-30 5W-30	10W-xx & other grades	0W-20 5W-20	0W-30 5W-30	10W-xx & other grades	xW-20	xW-30	10W-xx & other grades	xW-16	xW-20	xW-30	10W-xx & other grades
Sequence IVA (ASTM D6891)																2,7 400			
Average cam wear, μm, max.	-			-			120			90			90				-	-	
Sequence IVB (ASTM DXXXX)																	-	2,7	
Average intake lifter volume loss, mm ³ , max.	-			-			-			-			-				2,7	2,7	
End of test iron, ppm, max.	-			-			-			-			-				400	400	
Sequence VE (ASTM D5302)										-						-			
Average engine sludge, min.	9.0			9.0			-						-				-	-	
Rocker arm cover sludge, min.	7.0			7.0			-						-				-	-	
Average piston skirt varnish, min.	6.5			6.5			-						-				-	-	
Average engine varnish, min.	5.0			5.0			-						-				-	-	
Piston undercrown deposits	-			To report			-						-				-	-	
Ring land deposits	-			To report			-			-			-				-	-	
Cylinder bore wear	-			To report			-						-				-	-	
Oil screen clogging, %, max.	20			20			-						-				-	-	
Oil ring clogging, %, max. ⁽²⁾	15			To report			-						-				-	-	
Compression ring sticking (hot stuck)	None			None			-						-				-	-	
Maximum cam wear, μm (in.), max.	380 (0.015)			380 (0.015)			380 ⁽³⁾						-				-	-	
Average cam wear, μm (in.), max.	130 (0.005)			127 (0.005)			127 ⁽³⁾						-				-	-	

Notes:

(1) Allowed viscosity grades for ILSAC GF-1 / GF-2 / GF-3 / GF-4 GF-5 are limited to SAE 0W-xx, 5W-xx and 10W-xx.

(2) Effective 8, October 1993, the oil ring clogging parameter has been suspended indefinitely as a requirement for the sequence VE.

(3) Not required for oils containing a minimum of 0.08% mass phosphorus in the form of Zinc dialkylidithiophosphates (ZDDP).

ILSAC standard engine test limits

- 3 -



ILSAC STANDARD	GF-1			GF-2			GF-3			GF-4			GF-5			GF-6B	GF-6A		
SAE Viscosity grades ⁽¹⁾	0W-xx	5W-xx	10W-xx	0W-20 5W-20	Other 0W-xx & 5W-xx	10W-xx	0W-20 5W-20	0W-30 5W-30	10W-xx & other grades	0W-20 5W-20	0W-30 5W-30	10W-xx & other grades	xW-20	xW-30	10W-xx & other grades	xW-16	xW-20	xW-30	10W-xx & other grades
Sequence VG (ASTM D6593)							VG			VG			VG or VH			VH	VH		
Average engine sludge, min.							7.8			7.8			8.0/7.6			7.6	7.6		
Rocker arm cover sludge, min.							8.0			8.0			8.3/7.7			7.7	7.7		
Average piston skirt varnish, min.							7.5			7.5			7.5/7.6			7.6	7.6		
Average engine varnish, min.							8.9			8.9			8.9/8.6			8.6	8.6		
Oil screen clogging, %, max.							20			20			15/report			Rate and report	Rate and report		
Oil screen debris, %.				-			Rate and report			Rate and report			Rate and report/-			Rate and report	Rate and report		
Oil ring clogging, %.							Rate and report			Rate and report			Rate and report/-			Rate and report	Rate and report		
Hot stuck compression rings.							None			None			None			None	None		
Cold stuck compression rings							Rate and report			Rate and report			Rate and report/-			Rate and report	Rate and report		
Average follower pin wear, cyl #8, µm.							-			Rate and report			-			-	-		
Average ring gap increase, cyl #1 & #8, µm.							-			Rate and report			-			-	-		
Sequence VI (ASTM RR-D-21204)																			
EFEI (fuel economy improvement), %, min.	2.7			-			-			-			-			-	-		
Sequence VIA (ASTM D6202)																			
FEI vs. ASTM BC-2, %, min.	-			1.4 ⁽⁴⁾	1.1 ⁽⁵⁾	0.5 ⁽⁶⁾	-			-			-			-	-		
Sequence VIB (ASTM D6837)																			
FEI relative to ref. oil BC, %, min. : FEI 1	-			-			2.0	1.6	0.9	2.3	1.8	1.1	-			-	-		
FEI relative to ref. oil BC, %, min. : FEI 2							1.7	1.3	0.6	2.0	1.5	0.8							
Sum of FEI 1 + FEI 2, min.							-	3.0	1.6	-	-	-	-			-	-		
Sequence VID (ASTM D7589)													VIE/VIF			VIF	VIE		
FEI 2, %, min.	-			-			-			-			1.2/1.5	0.9/1.2	0.6/1.0	1.9	1.8	1.5	1.3
Sum of FEI, %, min.	-			-			-						2.6/3.2	1.9/2.5	1.5/2.2	4.1	3.8	3.1	2.8

Notes:

- (1) Allowed viscosity grades for ILSAC GF-1 / GF-2 / GF-3 / GF-4 are limited to SAE 0W-xx, 5W-xx and 10W-xx.
(2) Effective 8, October 1993, the oil ring clogging parameter has been suspended indefinitely as a requirement for the sequence VE.
(3) Not required for oils containing a minimum of 0.08% mass phosphorus in the form of Zinc dialkylidithiophosphates (ZDDP).

- (4) 1.7% min. if Sequence VIB is used (calculated FEI at 16h. vs. ASTM reference oil BC run before the candidate oil).
(5) 1.3% min. if Sequence VIB is used (calculated FEI at 16h. vs. ASTM reference oil BC run before the candidate oil).
(6) 0.6% min. if Sequence VIB is used (calculated FEI at 16h. vs. ASTM reference oil BC run before the candidate oil).

API “C” diesel service categories engine and laboratory test requirement summary - Current -



API CATEGORY	CH-4	CI-4	CI-4 PLUS	CJ-4	CK-4	FA-4
SAE Viscosity grades	All				xW-30, xW-40	xW-30
Sequence IIIF or IIIG	X ⁽¹⁾	X	X	X	-	-
CATERPILLAR SINGLE CYLINDER	1P+1K	(1R or 1P) + (1K or 1N)	(1R or 1P) + (1K or 1N)	1N	1N	1N
CATERPILLAR C13	-	-	-	X	X	X
MACK T-8E ⁽²⁾	X	X	X ⁽²⁾	-	-	-
MACK T-9 ⁽³⁾	X or T-10 or T-12	-	-	-	-	-
MACK T-10 ⁽⁴⁾	-	X or T-12	X or T-12	-	-	-
MACK T-11	-	-	X	X	X	X
MACK T-12	-	-	-	X	X	X
MACK T-13	-	-	-	-	X	X
CUMMINS M11/M11 EGR ⁽⁵⁾	M11 or ISM	M11-EGR or ISM	M11-EGR or ISM	-	-	-
CUMMINS ISM	-	-	-	X	X	X
CUMMINS ISB	-	-	-	X	X	X
RFWT	X	X	X	X	X	X
NAVISTAR EOAT (HEUI)	X	X	X	X	-	-
COAT	-	-	-	-	X	X
HTHS ASTM D4683	-	X	X	X	X	X
Sheared oil stay in grade ASTM D6278 or D7109	X	X	X	X	X	X
Sooted Oil MRV, ASTM D6896 Mack T-10A ⁽⁶⁾ or Mack T-11A	-	T-10A or T-12A	T-10A or T-12A	T-11A	T-11A	T-11A
HTCBT, ASTM D6594	X	X	X	X	X	X
ASTM D874, ASTM D4951 P and S	-	-	-	X	X	X
Volatility, ASTM D5800	X	X	X	X	X	X
Foam, ASTM D892, no option A	X	X	X	X	X	X
Elastomer compatibility	-	X	X	X	X	X

Notes:

(1) Seq IIIF 60h viscosity increase.

(2) A passing Mack T-11 can be used in place of the T-8E.

(3) The Mack T-9 and T-10 tests are no longer available to run. This requirement can be satisfied by passing a Mack T-12 against API CH-4 limits.

(4) The Mack T-10 test is no longer available to run. This requirement can be satisfied by passing a Mack T-12 against API CI-4 limits.

(5) The Cummins M11 and M11EGR tests are no longer available to run. This requirement can be satisfied by passing a Cummins ISM against API CH-4 or CI-4 limits.

(6) A passing Mack T-12A can be used in place of the T-10A.

API “C” diesel service categories laboratory test limits - Current - - 1 -



API CATEGORY	CH-4		CI-4		CI-4 PLUS		CJ-4		CK-4			FA-4		
SAE Viscosity grades			All						xW-30, xW-40			xW-30		
Foaming tendency , (ASTM D892), ml, max., foaming/ settling														
Sequence I	10 / 0 ^{(1) (4)}		10 / 0 ^{(1) (4)}		10 / 0 ^{(1) (4)}		10 / 0		10 / 0			10 / 0		
Sequence II	20 / 0 ^{(1) (4)}		20 / 0 ^{(1) (4)}		20 / 0 ^{(1) (4)}		20 / 0		20 / 0			20 / 0		
Sequence III	10 / 0 ^{(1) (4)}		10 / 0 ^{(1) (4)}		10 / 0 ^{(1) (4)}		10 / 0		10 / 0			10 / 0		
HTCBT at 135°C (ASTM D6594), ppm increase, max.														
Copper	20		20		20		20		20			20		
Lead	120		120		120		120		120			120		
Tin	Report		Report		Report		-		-			-		
Copper strip rating (acc. to ASTM D130), max.	3		3		3		3		3			3		
HTHS viscosity (ASTM D4683), mPa.s, min.	SAE J300		3.5		3.5		3.5		xW-30: 3.5, xW-40: SAE J300			2.9		
HTHS viscosity (ASTM D4683), mPa.s, max.	-		-		-		-		xW-30: NA, xW-40: SAE J300			3.2		
Kinematic viscosity at 100°C (ASTM D445), mm²/s, min.	SAE J300		SAE J300		SAE J300		SAE J300		SAE J300			SAE J300		
Low temperature cranking viscosity (ASTM D5293), mPa.s at -xx°C	SAE J300		SAE J300		SAE J300		SAE J300		SAE J300			SAE J300		
Pumpability (ASTM D4684), 60000 mPa.s max./ no yield stress at -xx°C	SAE J300		SAE J300		SAE J300		SAE J300		SAE J300			SAE J300		
NOACK volatility (ASTM D5800)	10W-30	15W-40					Not 10W-30		For 10W-30					
% loss at 250°C, max.	20	18	15		15		13		15		13			
Volatility loss at 371°C (ASTM D6417), %, max.	17	15	-		-		-		-		-			
Kinematic Viscosity after shearing (ASTM D6278)	xW-30	xW-40	xW-30	xW-40	xW-30	xW-40								
Kin. Visc. at 100°C after 30 cycle Bosch shearing, mm²/s, min.	9.3	12.5	9.3	12.5	9.3	12.5	-		-		-			
Kinematic Viscosity after shearing (ASTM D7109)							xW-30		xW-40		xW-30	OW-40	Other xW-40	
Kin. Visc. at 100°C after 90 cycle Bosch shearing, mm²/s, min.	-		-		-		9.3		12.5		9.3	12.5	12.8	9.3
HTHS Visc. at 150°C after 90 cycle Bosch shearing, mm²/s, min.	-		-		-		-		-		3.4	-	-	2.8

API “C” diesel service categories laboratory test limits - Current - - 2 -



Oronite

API CATEGORY	CH-4	CI-4	CI-4 PLUS	CJ-4	CK-4	FA-4
SAE Viscosity grades	All				xW-30, xW-40	xW-30
Elastomer Compatibility (ASTM D7216) ⁽²⁾	-	Pass	Pass	Pass	Pass	Pass
Nitrile NBR		Pass	Pass	Pass	Pass	Pass
Silicone VMQ		Pass	Pass	Pass	Pass	Pass
Polyacrylate ACM		Pass	Pass	Pass	Pass	Pass
Fluorelastomer FKM		Pass	Pass	Pass	Pass	Pass
Vamac G		-	-	Pass	Pass	Pass
MRV TP-1 (ASTM D4684)	-	25000	25000	-	-	-
Viscosity of the 180 h. used oil drain sample from a T-II test ⁽³⁾ , tested at -20°C, mPa.s, max.		25000	25000			
If yield stress is detected, use the modified test method (external preheat), then measure the viscosity, mPa.s, max.		<35	<35			
Measure the yield stress, Pa.						
MRV TP-1 (ASTM D6896)	-	-	-	25000	25000	25000
Viscosity of the 180 h. used oil drain sample from a T-II test, tested at -20°C, mPa.s, max.				25000	25000	25000
If yield stress is detected, use the modified test method (external preheat), then measure the viscosity, mPa.s, max.				<35	<35	<35
Measure the yield stress, Pa.						
Sulfated ash (ASTM D874), % m/m, max. (non critical)	-	-	-	1.0	1.0	1.0
Phosphorus (ASTM D5185), % m/m, max. (non critical)	-	-	-	0.12	0.12	0.12
Sulfur (ASTM D5185), % m/m, max. (non critical)	-	-	-	0.4	0.4	0.4

Notes:

(1) 10 minutes settling.

(2) Please refer to chapter “Elastomer Compatibility” for limits.

(3) Results from T-10A or T-12A can be used as an alternative to T-11A results.

(4) Option A not allowed.

API “C” diesel service categories engine test limits - Current - - 1 -



API CATEGORY	CH-4	CI-4	CI-4 PLUS	CJ-4	CK-4	FA-4
SAE Viscosity grades	All				xW-30, xW-40	xW-30
Sequence IIIF, IIIG (ASTM D6984, D7320)	IIIF (60h) or IIIG	IIIF or IIIG	IIIF or IIIG	IIIF or IIIG		
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	-	-
Viscosity (at 40°C), increase from 10 min sample, %, max. (IIIF)	295 - 295 - 295 (MTAC) ⁽¹⁾	275 - 275 - 275 (MTAC)	275 - 275 - 275 (MTAC)	275 - 275 - 275 (MTAC)		
Kinematic viscosity, % increase at 40°C, max. (IIIG)	150 - 150 - 150 (MTAC)	150 - 150 - 150 (MTAC)	150 - 150 - 150 (MTAC)	150 - 150 - 150 (MTAC)		
CATERPILLAR SINGLE CYLINDER 1K, 1N (ASTM D6750)	1K	1K ⁽²⁾	1K ⁽²⁾	1N	1N	1N
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Top groove fill (TGF), %, max.	24 - 27 - 29	24 - 27 - 29	24 - 27 - 29	20 - 23 - 25	20 - 23 - 25	20 - 23 - 25
Weighted demerits (WD), max.	332 - 347 - 353	332 - 347 - 353	332 - 347 - 353	286.2 - 311.7 - 323.0	286.2 - 311.7 - 323.0	286.2 - 311.7 - 323.0
Top land heavy carbon (TLHC), %, max.	4 - 5 - 5	4 - 5 - 5	4 - 5 - 5	3 - 4 - 5	3 - 4 - 5	3 - 4 - 5
Piston, ring and liner scuffing	none	none	none	none	none	none
Ring sticking	-	-	-	none	none	none
Avg. oil cons., g/MJ max., 0-252 h.	0.139	0.139	0.139	0.15	0.15	0.15
CATERPILLAR SINGLE CYLINDER 1P, 1R (ASTM D6681, D6923)	1P	1R ⁽³⁾	1R ⁽³⁾			
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3			
Top groove carbon (TGC), demerits, max.	36 - 39 - 41	52 - 57 - 59	52 - 57 - 59			
Weighted demerits (WD), max.	350 - 378 - 390	382 - 396 - 402	382 - 396 - 402			
Top land carbon (TLC), demerits, max.	40 - 46 - 49	31 - 35 - 36	31 - 35 - 36			
Piston, Ring and Liner scuffing	none	none	none			
Ring sticking	-	none	none	-	-	-
Avg. oil cons., g/h, max., 0-360 h	12.4	-	-			
Initial oil cons. g/h, max., 0-252 h	-	13.1	13.1			
Final oil cons., g/h, max., 432-504 h	-	Initial + 1.8	Initial + 1.8			
Final oil cons., g/h, max., 312-360 h	14.6	-	-			

Notes:

(1) MTAC - use method without transformations.

(2) Alternatively, Test Method D6750 (1N) can be used; if this test method is used, the measured parameters and primary performance criteria are the same as those shown for Test Method D6750 (1N) in the CJ-4 category, except that oil consumption, max, is 0.5 g/MJ.

(3) Oils shall pass either Cat 1P or Cat 1R. Cat 1P limits are those required for API CH-4.

API “C” diesel service categories engine test limits - Current - - 2 -



API CATEGORY	CH-4	CI-4	CI-4 PLUS	CJ-4	CK-4	FA-4
SAE Viscosity grades	All				xW-30, xW-40	xW-30
CUMMINS M11/M11-EGR ⁽¹⁾	M11	M11 EGR	M11 EGR			
Run number:	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3			
Rocker pad avg. weight loss norm. to 4.5% Soot, mg, max.	6.5 - 7.5 - 8.0	-	-			
Average crosshead weight loss, mg, max.	-	20.0 - 21.8 - 22.6	20.0 - 21.8 - 22.6	-	-	-
Oil filter ΔP at EOT, kPa, max.	79 - 93 - 100	275 - 320 - 341	275 - 320 - 341			
Average engine sludge, CRC merits at EOT, min.	8.7 - 8.6 - 8.5	7.8 - 7.6 - 7.5	7.8 - 7.6 - 7.5			
Average top ring weight loss, mg	-	Report	Report			
CUMMINS ISM ⁽¹⁾ (ASTM D7468)						
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Merit rating, min.	-	-	-	1000 - 1000 - 1000	1000 - 1000 - 1000	1000 - 1000 - 1000
Top ring weight loss, mg, max.	-	-	-	100 - 100 - 100	100 - 100 - 100	100 - 100 - 100
Crosshead wear, mg, max. (anchor)	7.5 - 7.8 - 7.9	7.5 - 7.8 - 7.9	7.5 - 7.8 - 7.9	7.1 (5.7)	7.1 (5.7)	7.1 (5.7)
Oil filter ΔP at 150 h., kPa, max. (anchor)	79 - 95 - 103	55 - 67 - 74	55 - 67 - 74	19 (13)	19 (13)	19 (13)
Valve adj. screw mass loss, mg, max. (anchor)	-	-	-	49 (27)	49 (27)	49 (27)
Engine sludge, CRC merits at EOT, min. (anchor)	8.1 - 8.0 - 8.0	8.1 - 8.0 - 8.0	8.1 - 8.0 - 8.0	8.7 (9.0)	8.7 (9.0)	8.7 (9.0)
ROLLER FOLLOWER WEAR TEST (RFWT) (ASTM D5966)						
Run number:	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Average pin wear, mils, max.	0.30 - 0.33 - 0.36	0.30 - 0.33 - 0.36	0.30 - 0.33 - 0.36	0.30 - 0.33 - 0.36	0.30 - 0.33 - 0.36	0.30 - 0.33 - 0.36
Average pin wear, (μm), max.	(7.6 - 8.4 - 9.1)	(7.6 - 8.4 - 9.1)	(7.6 - 8.4 - 9.1)	(7.6 - 8.4 - 9.1)	(7.6 - 8.4 - 9.1)	(7.6 - 8.4 - 9.1)
ENGINE OIL AERATION TEST (EOAT)						
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	-	-
Oil aeration at 20 h, %, max.	8.0 - 8.0 - 8.0 (MTAC) ⁽²⁾	8.0 - 8.0 - 8.0 (MTAC) ⁽²⁾	8.0 - 8.0 - 8.0 (MTAC) ⁽²⁾	8.0 - 8.0 - 8.0 (MTAC)		
CATERPILLAR OIL AERATION TEST (COAT)						
Run number	-	-	-	-	1 - 2 - 3	1 - 2 - 3
Average aeration, 40 h to 50 h, %, max.					11.8 - 11.8 - 11.8	11.8 - 11.8 - 11.8

Notes:

(1) A Cummins ISM test and its limits can be used as an alternative for the Cummins M11/ M11-EGR test.

(2) MTAC - use method without transformations.

API "C" diesel service categories engine test limits - Current - - 3 -



API CATEGORY	CH-4	CI-4	CI-4 PLUS	CJ-4	CK-4	FA-4
SAE Viscosity grades	All				xW-30, xW-40	xW-30
CATERPILLAR C13 (ASTM D7549)						
Run number				1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Merit rating, min.				1000 - 1000 - 1000	1000 - 1000 - 1000	1000 - 1000 - 1000
Oil consumption, g/h, max. (anchor)	-	-	-	31 (25)	-	-
Top land carbon avg., max., %. (anchor)				35 (30)	-	-
Top groove carbon avg., max., %. (anchor)				53 (46)	-	-
Second ring top carbon, max., %. (anchor)				33 (22)	-	-
Hot stuck piston ring				None	-	-
MACK T-8E ⁽¹⁾						
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	-	-	-
Relative viscosity at 100°C at 4.8% soot, max.	2.1 - 2.2 - 2.3 ⁽²⁾	1.8 - 1.9 - 2.0 ⁽³⁾	1.8 - 1.9 - 2.0 ⁽³⁾			
Visc. Inc. at 100°C at 3.8% soot, mm ² /s, max.	11.5 - 12.5 - 13	-	-			
MACK T-11 ⁽¹⁾ (ASTM D7156)						
Run number			1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Minimum % TGA soot at 4.0 mm ² /s increase at 100°C.	-	-	-	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3
Minimum % TGA soot at 12.0 mm ² /s increase at 100°C.			6.00 - 5.89 - 5.85	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9
Minimum % TGA soot at 15.0 mm ² /s increase at 100°C.			-	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5
CUMMINS ISB (ASTM D7484)						
Run number.				1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Slider tappet weight loss, mg, average, max.	-	-	-	100 - 108 - 112	100 - 108 - 112	100 - 108 - 112
Cam lobe wear, µm, average, max.				55 - 59 - 61	55 - 59 - 61	55 - 59 - 61
Crosshead weight loss, mg, average.				Report	Report	Report

Notes:

(1) A Mack T-11 test and its limits can be used as an alternative for the Mack T8-E test in the applicable categories.

(2) Relative viscosity = Viscosity at 4.8% Soot / (viscosity of new oil - 50% of viscosity loss by ASTM D3945).

(3) Relative viscosity = Viscosity at 4.8 % Soot / Viscosity of New Oil sheared in ASTM D6278.

API “C” diesel service categories engine test limits - Current - - 4 -



API CATEGORY	CH-4	CI-4	CI-4 PLUS	CJ-4	CK-4	FA-4
SAE Viscosity grades	All				xW-30, xW-40	xW-30
MACK T-9 ⁽¹⁾						
Run number	1 - 2 - 3					
Avg. liner wear norm. to 1.75% soot, μm , max.	25.4 - 26.6 - 271	-	-	-	-	-
Average top ring weight loss, mg, max.	120 - 136 - 144					
Lead increase, ppm, max.	25 - 32 - 36					
MACK T-10 ⁽²⁾						
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3			
Merit rating, min.	-	1000 - 1000 - 1000	1000 - 1000 - 1000			
Liner wear, μm , max. (anchor)	32 - 34 - 35	32.0 (30)	32.0 (30)	-	-	-
Ring wear, mg, max. (anchor)	150 - 159 - 163	158 (140)	158 (140)			
Lead content at EOT mg/kg, max. (anchor)	50 - 56 - 59	35 (30)	35 (30)			
Lead content 250-300 h, mg/kg, max. (anchor)	-	14 (10)	14 (10)			
Used oil pumpability at 75 h, MRV at -20°C, mPa.s, max. ⁽³⁾	-	25000 (NYS) ⁽⁴⁾	25000 (NYS) ⁽⁴⁾			
Mack T-12 (ASTM D7422)						
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Merit rating, min.	-	1000 - 1000 - 1000	1000 - 1000 - 1000	1000 - 1000 - 1000	-	-
Liner wear, μm , max. (anchor)	30.0 - 30.8 - 31.1	26 (23)	26 (23)	24 (20)	24.0 - 24.0 - 24.0	24.0 - 24.0 - 24.0
Top ring weight loss, mg, max. (anchor)	120 - 132 - 137	117 (82)	117 (82)	105 (70)	105 - 105 - 105	105 - 105 - 105
Oil consumption, g/h, max. (anchor)	-	95 (82)	95 (82)	85.0 (65.0)	-	-
Lead content at EOT, mg/kg, max. (anchor)	65 - 75 - 79	42 (35)	42 (35)	35 (25)	-	-
Lead content 250-300 h, mg/kg, max. (anchor)	-	18 (13)	18 (13)	15 (10)	-	-
Used oil pumpability at 75 h, MRV at -20°C, mPa.s, max. ⁽³⁾	-	25000 (NYS) ⁽⁴⁾	25000 (NYS) ⁽⁴⁾	25000 (NYS) ⁽⁴⁾	-	-
MACK T-13						
Run number					1 - 2 - 3	1 - 2 - 3
IR Peak at EOT, Abs., cm^{-1}	-	-	-	-	125 - 130 - 133	125 - 130 - 133
Kinematic viscosity increase at 40°C, % max.					75 - 85 - 90	75 - 85 - 90
Average oil consumption, 48 h to 192 h, g/h, max.					Report	Report

Notes:

(1) A Mack T-12 or Mack T-10 test and its limits can be used as an alternative for the Mack T-9 test.

(2) A Mack T-12 test and its limits can be used as an alternative for the Mack T-10 test.

(3) Sample to test can also be from a Mack T-10A test or a Mack T-12A test to generate the sample for ASTM D4684 as used to measure this parameter. (Mack T-10A is the name given to a Mack T-10 test run for 75 h.

Mack T-12A is the name given to a Mack T-12 test run for 100 h.).

(4) If Yield stress is detected, use modified ASTM D4684 (external preheat) ; then limits become Viscosity : 25.000 cP max and Yield Stress, < 35 Pa.

API “C” diesel service categories engine and laboratory test requirement summary - Obsolete -



API CATEGORY	CC	CD	CD-II	CE	CF	CF-2	CF-4	CG-4
SAE Viscosity grades	All							
Sequence VIII (or CRC L-38 ⁽¹⁾)	X	X	X	X	X	X	X	X
Sequence III	-	-	-	-	-	-	-	IIIF or IIIG
CATERPILLAR	1H/1H2	1G2	1G2	1G2	1M-PC	1M-PC	1K	1N
DD6V-53T	-	-	X	-	-	-	-	-
DD6V-92TA	-	-	-	-	-	X	-	-
MACK T-6	-	-	-	X	-	-	X or T-9 or T10	-
MACK T-7	-	-	-	X	-	-	X or T-8A	-
MACK T-8 / T-8E	-	-	-	-	-	-	-	T-8
CUMMINS NTC-400	-	-	-	X	-	-	X ⁽²⁾	-
RFWT	-	-	-	-	-	-	-	X
EOAT aeration Navistar	-	-	-	-	-	-	-	X
Cummins corrosion	-	-	-	-	-	-	X	X
Metals, AN, BN	-	-	-	-	X	X	X	X

Notes:

(1) Test no longer available.

(2) Cummins NTC 400 can be replaced by one additional Cat 1K, meeting CF-4 limits.

API “C” diesel service categories engine test limits - Obsolete - - 1 -



API CATEGORY	CC	CD	CD-II	CE	CF	CF-2	CF-4	CG-4
SAE Viscosity grades	All							
CRC L-38 (ASTM D5119)								
Bearing weight loss, mg, max.	50	50	50	50	-	-	-	-
Piston skirt varnish, min.	9.0	9.0	9.0	-				
Sequence VIII (ASTM D6709) ⁽³⁾								
Run number	-	-	-	-	1 - 2 - 3	1 - 2 - 3	-	1 - 2 - 3
Bearing weight loss, mg, max.					29.3 - 31.9 - 33.0	29.3 - 31.9 - 33.0	33.0	29.3 - 31.9 - 33.0
Used oil vis., mm ² /s > SAE grade limit, min.					-	-	-	0.5 ^{(2) (4)}
Sequence III								IIIF or IIIG
Run number	-	-	-	-	-	-	-	1 - 2 - 3
60 h. Viscosity (at 40°C), increase from 10 min. sample, %, max. (IIIF)								325 - 349 - 360
Kinematic viscosity, % increase at 40°C, max. (IIIG)								150 - 173 - 184
CATERPILLAR	1H2	1G2	1G2	1G2	1M-PC	1M-PC	1K	1N
Run number	-	-	-	-	-	-	1 - 2 - 3	1 - 2 - 3
Top groove fill, %, max.	45	80	80	80	70	-	24 - 26 - 27	20 - 23 - 25
Weighted total demerit, max.	140	300	300	300	240	100(5)	332 - 339 - 342	286.2 - 311.7 - 323.0
Top land heavy carbon (TLHC), %, max.	0.013	0.013	0.013	0.013 (0.0005)	-	-	4 - 4 - 5	3 - 4 - 5
Piston, ring and liner scuffing	-	-	-	-	None	-	None	None
Ring sticking	-	-	-	-	None	-	None	None
Avg. oil cons., g/Mj max., 0-252 h.	-	-	-	-	-	-	0.139	0.139
Avg. oil cons., g/Mj max., 228-252 h.	-	-	-	-	-	-	0.075	-
CUMMINS NTC 400							⁽⁸⁾	
Oil cons. (2 nd order regression)				<ref.oil+1std dev			< ref oil	
Cam follower pin wear, in., max.	-	-	-	0.002	-	-	0.002	-
Crownland heavy carbon, %, max.				25			15	
Piston deposits, third ring land, total CRC demerits for all 6 pistons, max				40			-	

API “C” diesel service categories engine test limits - Obsolete - - 2 -



API CATEGORY	CC	CD	CD-II	CE	CF	CF-2	CF-4	CG-4
SAE Viscosity grades	All							
DETROIT DIESEL			DD6V53T			DD6V 92TA		
Run number						1 - 2 - 3		
Weighted total demerit, avg., max.			400			-		
Hot stuck rings.			None			-		
Liner distress, avg. % area, max.			12.0			-		
Valve distress	-	-	None	-	-	-	-	-
Piston rings face distr.fire ring, demerit, max.			-			0.23 - 0.24 - 0.26		
Piston rings face distr., avg. 2 nd +3 rd ring, demerit, max.			13.0			0.20 - 0.21 - 0.22		
Cylinder liner scuffing, area %, max.			-			45 - 48 - 50		
Cylinder liner port plugging area, avg., %, max.			-			2 - 2 - 2		
Cylinder liner port plugging area, single cylinder, %, max.			-			5 - 5 - 5		
ROLLER FOLLOWER WEAR TEST (RFWT)								
Run number.								1 - 2 - 3
Average pin wear, mils, max.								0.45 - 0.49 - 0.50
Average pin wear, (µm), max.								(11.4 - 12.4 - 12.7)
ENGINE OIL AERATION TEST (EOAT)								
Oil aeration at 20 h., %, max.								10.0
MACK T-6				(1)			(1) (6)	
Merit rating, min.				90 (2)			90 (2)	
MACK T-7								
Avg. rate of vis. inc. at 100°C/h. for last 50 h., mm ² /s/h, max.				0.040			0.04 (7)	

API “C” diesel service categories engine test limits - Obsolete - - 3 -



API CATEGORY	CC	CD	CD-II	CE	CF	CF-2	CF-4	CG-4
SAE Viscosity grades	All							
MACK T-8 / T-8A							T-8A ⁽⁷⁾	T-8
Run number							-	1 - 2 - 3
100-150 hour avg. rate of vis. Inc. at 100°C/h, mm ² /s/h, max.							0.20	-
Relative viscosity at 100°C at 4.8% soot, max.	-	-	-	-	-	-	-	-
Visc. Inc. at 100°C at 3.8% soot, mm ² /s, max.							-	11.5 - 12.5 - 13.0
Filter plugging, diff. press., Kpa (psi), max.							-	138 (20)
Oil consumption, avg. lb/bhp-h(g/kWh), max.							-	0.0005 (0.304)
MACK T-9							⁽⁶⁾	
Avg. liner wear norm. to 1.75% soot, µm, max.							40	
Average top ring weight loss, mg, max.							150	
Lead increase, ppm, max.							-	
MACK T-10							⁽⁹⁾	
Avg. liner wear norm. to 1.75% soot, µm, max.							47	
Average top ring weight loss, mg, max.							180	

Notes:

- (1) 151 mg or greater gives 0 Mack merit.
- (2) All individual ratings must be greater than 0.
- (3) ASTM D4485-5a issue shows that a Sequence VIII is required to meet API CF, API CF-2, API CF-4 and API CG-4. Sequence VIII has been shown to correlate with CRC L-38, now no more available.
- (4) Limit do not apply to monograde oils.
- (5) Rating of top and 2nd groove carbon and land carbon.
- (6) A Mack T-9 test and its limits (as reported in CF-4 above) can be used as an alternate for the Mack T-6 test.
- (7) A Mack T-8A test version and its limits (as reported in CF-4 above) can be used as an alternate for the Mack T-7 test.
- (8) Cummins NTC 400 is no longer available and can be replaced by one additional Caterpillar 1K and ASTM D5968 CBT at copper.
- (9) A Mack T-9 test and its limits (as reported in CF-4 above) can be used as an alternate for the Mack T-6 test.

**ACEA
sequences
for gasoline
and diesel
engine oils**



ACEA sequences - Overview of validity periods



Issue year of full document	First allowable use	Mandatory for new claims	Oils with this claim may be marketed until
1996	January 1, 1996	March 1, 1997	March 1, 2000
1998	March 1, 1998	March 1, 1999	March 1, 2002
1999	September 1, 1999	September 1, 2000	February 1, 2004
2002	February 1, 2002	February 1, 2003	November 1, 2006
2004	November 1, 2004	November 1, 2005	December 31, 2009
2007	February 1, 2007	February 1, 2008	December 23, 2010
2008	December 22, 2008	December 22, 2009	December 22, 2012
2010	December 22, 2010	December 22, 2011	December 22, 2014
2012	December 14, 2012	December 14, 2013	December 1, 2018
2016	December 1, 2016	December 1, 2017	...

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2016
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				A3/B3-16	A3/B4-16	A5/B5-16	
1. Laboratory tests							
1.1 Viscosity Grades		According to SAE J300 Latest Active Issue		No restriction except as defined by shear stability and HTHS requirements. Manufacturers may indicate specific viscosity requirements related to ambient temperature.			
1.2 *Shear Stability	CEC L-014-93 or ASTM D6278 or ASTM D7109	Viscosity after 30 cycles measured at 100°C	mm²/s	All grades to be "stay in grade"			
1.3.1 HTHS Viscosity	CEC L-036-90	Dynamic Viscosity at 150°C and shear rate of 10 ⁶ s ⁻¹	mPa.s	≥ 3.5		≥ 2.9 and ≤ 3.5	
1.3.2 *HTHS Viscosity at 100°C	CEC L-036-90	Dynamic Viscosity at 100°C and shear rate of 10 ⁶ s ⁻¹	mPa.s	-		Report	
1.4 Evaporative Loss (Noack)	CEC L-040-93	Max. weight loss after 1 h at 250°C	%	≤ 13			
1.5 TBN	ASTM D2896		mg KOH/g	≥ 8.0	≥ 10.0	≥ 8.0	
1.6 *Sulphur	ASTM D5185		% m/m	Report			
1.7 *Phosphorus	ASTM D5185		% m/m	Report			
1.8 *Sulfated ash	ASTM D874		% m/m	≥ 0.9 and ≤ 1.5	≥ 1.0 and ≤ 1.6	≤ 1.6	
1.9 Chlorine	ASTM D6443		ppm m/m	Report			
1.10 *Oil / Elastomer compatibility	CEC L-112-16	Max. variation of characteristics after immersion for 7 days in fresh oil without pre-ageing		Elastomer type			
				RE6	RE7	RE8	RE9
				Report	Report	Report	Report
				-70 / +20	-65 / +15	-51 / +9	-65 / +19
				-5.5 / +2.1	-1.8 / +8.9	0.0 / +12.0	-2.5 / +16.0
1.11 Foaming tendency	ASTM D892 without option A	Tendency - stability	ml	Sequence I (24°C) 10 – nil Sequence II (94°C) 50 – nil Sequence III (24°C) 10 – nil			

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2016
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits		
				A3/B3-16	A3/B4-16	A5/B5-16
1. Laboratory tests						
1.12 High temperature foaming tendency	ASTM D6082 High temperature foam test	Tendency – stability	ml	Sequence IV (150°C) 100 – nil		
1.13 Low-temperature pumpability	CEC L-105-12	MRV	mPa.s	-	According to SAE J300 for fresh oil	
		Yield stress (MRV at SAE J300 temperatures applicable for fresh oil viscosity grade)	Pa			
1.14 Oil oxidation with biodiesel	CEC L-109-14	Oil oxidation at 168h (DIN 51453)	A/cm	≤ 120	≤ 120	≤ 100
		Oil oxidation at 216h EOT (DIN 51453)	A/cm	Report	Report	≤ 120
		Viscosity increase, relative at 168h (delta KV100)	%	≤ 150	≤ 150	≤ 60
		Viscosity increase, relative at 216h (delta KV100 at EOT 216h)	%	Report	Report	≤ 150

Notes:

* Additional information is given as footnotes underneath the table for the C-categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2016
------	--	-----------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits		
				A3/B3-16	A3/B4-16	A5/B5-16
2. Engine tests						
2.1 Gasoline DI engine cleanliness	CEC L-111-16 (EP6CDT)	Piston cleanliness Turbo charger deposits **, average value of zones C, D, E and F	merit merit	≥ RL259 ≥ 6.0		
2.2 Low temperature sludge	ASTM D6593-00 (Sequence VG)	Average engine sludge	merit	≥ 7.8		
		Rocker cover sludge	merit	≥ 8.0		
		Average piston skirt varnish	merit	≥ 7.5		
		Average engine varnish	merit	≥ 8.9		
		Comp. ring (hot stuck)		None		
	Under protocol & requirements for API	Oil screen clogging	%	≤ 20		
2.3 *Valve train scuffing wear						
2.4 *Black sudge	Daimler M271	Engine sludge, average	merit	≥ RL140 + 4σ or ≥ RL261 + 1σ		
2.5 Fuel economy	CEC-L-054-96 (M111)	Fuel economy improvement	%	-	-	≥ 2.5
2.6 DI diesel oil dispersion at medium temperature	CEC L-106-16 (DV6C)	Absolute viscosity increase at 100°C and 5.5% soot Piston cleanliness **	mm²/s merit	≤ 0.9 x RL248 result ≥ 2.5		
2.7 Diesel engine wear	CEC L-099-08 (OM646LA)	Cam wear outlet (avg. max. wear 8 cams)	µm	≤ 140		≤ 120
		Cam wear inlet (avg. max. 8 cams) **	µm	≤ 110		≤ 100
		Cylinder wear (avg. 4 cyl.) **	µm	≤ 5.0		≤ 5.0
		Bore polishing (13mm) (max of 4 cyl.) **	%	≤ 3.5		≤ 3.0
		Tappet wear inlet (avg. max. wear 8 cams) **	µm	Report		Report
		Tappet outlet wear (avg. max.wear 8 cams) **	µm	Report		Report
		Piston cleanliness (avg. 4 pistons) **	merit	Report		≥ 12
		Engine sludge average **	merit	Report		≥ 8.8

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2016
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits		
				A3/B3-16	A3/B4-16	A5/B5-16
2. Engine tests						
2.8 *DI diesel piston cleanliness & ring sticking	CEC L-078-99 (VW TDI)	Piston cleanliness	merit	≥ RL 206 minus 4 points	≥ RL 206	≥ RL 206
		Ring sticking (Rings 1 & 2)				
		Average of all 8 rings	ASF	≤ 1.2	≤ 1.0	≤ 1.0
		Max. for any 1 st ring	ASF	≤ 2.5	≤ 1.0	≤ 1.0
		Max. for any 2 nd ring	ASF	0.0	0.0	0.0
		EOT TBN (ISO 3771) **	mg KOH/g	≥ 4.0	≥ 6.0	≥ 4.0
		EOT TAN (ASTM D 664) **	mg KOH/g	Report	Report	Report
2.9 Effects of biodiesel	CEC L-104-16 (OM646LA Bio)	Piston cleanliness	merit	-	≥ RL255 + 2 Report Report	
		Ring sticking **	ASF	-		
		Sludge **	merit	-		

Notes:
*/** Additional information is given as footnotes underneath the table for the C-categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2016
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits				
				C1-16	C2-16	C3-16	C4-16	C5-16
1. Laboratory tests								
1.1 Viscosity Grades		According to SAE J300 Latest Active Issue		No restriction except as defined by shear stability and HTHS requirements. Manufacturers may indicate specific viscosity requirements related to ambient temperature.				
1.2 *Shear Stability	CEC L-014-93 or ASTM D6278 or ASTM D7109	Viscosity after 30 cycles measured at 100°C	mm²/s	All grades to be "stay in grade"				
1.3.1 HTHS Viscosity	CEC L-036-90	Dynamic viscosity at 150°C and shear rate of 10 ⁶ s ⁻¹	mPa.s	≥ 2.9		≥ 3.5		≥ 2.6 and < 2.9
1.3.2 *HTHS Viscosity at 100°C	CEC L-036-90	Dynamic viscosity at 100°C and shear rate of 10 ⁶ s ⁻¹	mPa.s	Report		Report		Report
1.4 Evaporative loss	CEC-L-040-93 (Noack)	Max. weight loss after 1 h at 250°C	%	≤ 13			≤ 11	≤ 13
1.5 TBN	ASTM D2896		mg KOH/g	-		≥ 6.0	≥ 6.0	≥ 6.0
1.6 *Sulphur	ASTM D5185		% m/m	≤ 0.2	≤ 0.3		≤ 0.2	≤ 0.3
1.7 * Phosphorus	ASTM D5185		% m/m	≤ 0.05	≥ 0.07 ≤ 0.09	≥ 0.07 ≤ 0.09	≤ 0.09	≥ 0.07 ≤ 0.09
1.8 *Sulfated ash	ASTM D874		% m/m	≤ 0.5	≤ 0.8		≤ 0.5	≤ 0.8
1.9 Chlorine	ASTM 6443		ppm m/m	Report				
1.10 *Oil / Elastomer compatibility	CEC L-112-16	Max. variation of characteristics after immersion for 7 days in fresh oil without pre-ageing		Elastomer type				
				RE6	RE7	RE8	RE9	
				Report	Report	Report	Report	
				-70 / +20	-65 / +15	-51 / +9	-65 / +19	
				-5.5 / +2.1	-1.8 / +8.9	0.0 / +12.0	-2.5 / +16.0	
1.11 Foaming tendency	ASTM D892 without option A	Tendency - stability	ml	Sequence I (24°C) 10 – nil Sequence II (94°C) 50 – nil Sequence III (24°C) 10 – nil				

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2016
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits				
				C1-16	C2-16	C3-16	C4-16	C5-16
1. Laboratory tests								
1.12 High temperature foaming tendency	ASTM D6082 High temperature foam test	Tendency – stability	ml	Sequence IV (150°C) 100 – nil				
1.13 Low-temperature pumpability	CEC L-105-12	MRV Yield stress (MRV at SAE J300 temperatures applicable for fresh oil viscosity grade)	mPa.s Pa	According to SAE J300 for fresh oil				
1.14 Oil oxidation with biodiesel	CEC L-109-14	Oil oxidation at 168h (DIN 51453)		≤ 100	≤ 100	≤ 100	≤ 100	≤ 100
		Oil oxidation at 216h EOT (DIN 51453)		≤ 120	≤ 120	≤ 120	≤ 120	≤ 120
		Viscosity increase, relative at 168h (delta KV100)		≤ 60	≤ 60	≤ 60	≤ 60	≤ 60
		Viscosity increase, relative at 216h (delta KV100 at EOT 216h)		≤ 150	≤ 150	≤ 150	≤ 150	≤ 150

Notes:

* Additional information is given as footnotes underneath the table for the C-categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2016
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
 Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits				
				C1-16	C2-16	C3-16	C4-16	C5-16
2. Engine tests								
2.1 Gasoline DI engine cleanliness	CEC L-111-16 (EP6CDT)	Piston cleanliness Turbo charger deposits **, average value of zones C, D, E and F	merit merit	≥ RL259 ≥ 6.0				
2.2 Low temperature sludge	ASTM D6593-00 (Sequence VG)	Average engine sludge	merit	≥ 7.8				
		Rocker cover sludge	merit	≥ 8.0				
	Average piston skirt varnish	merit	≥ 7.5					
	Average engine varnish	merit	≥ 8.9					
	Under protocol & requirements for API	Comp. ring (hot stuck)		None				
		Oil screen clogging	%	≤ 20				
2.3 *Valve train scuffing wear								
2.4 *Black sudge	Daimler M271	Engine sludge, average	merit	≥ RL140 + 4σ or ≥ RL261 + 1σ				
2.5 Fuel economy	CEC-L-054-96 (M111)	Fuel economy improvement	%	≥ 3.0	2.5	≥ 1.0 (for -W-30 only, no limit for xW-40)		≥ 3.0
2.6 DI diesel oil dispersion at medium temperature	CEC L-106-16 (DV6C)	Absolute viscosity increase at 100°C and 5.5% soot Piston cleanliness **	mm²/s merit	≤ 0.9 x RL248 result ≥ 2.5				
2.7 Diesel engine wear	CEC L-099-08 (OM646LA)	Cam wear outlet (avg. max. wear 8 cams)	µm	≤ 120		≤ 120		
		Cam wear inlet (avg. max. 8 cams) **	µm	≤ 100		≤ 100		
		Cylinder wear (avg. 4 cyl.) **	µm	≤ 5.0		≤ 5.0		
		Bore polishing (13mm) (max of 4 cyl.) **	%	≤ 3.0		≤ 3.0		
		Tappet wear inlet (avg. max. wear 8 cams) **	µm	Report		Report		
		Tappet outlet wear (avg. max.wear 8 cams) **	µm	Report		Report		
		Piston cleanliness (avg. 4 pistons) **	merit	Report		≥ 12		
		Engine sludge average **	merit	Report		≥ 8.8		

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2016
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits				
				C1-16	C2-16	C3-16	C4-16	C5-16
2. Engine tests								
2.8 *DI diesel piston cleanliness & ring sticking	CEC L-078-99 (VW TDI)	Piston cleanliness	merit	≥ RL 206	≥ RL 206	≥ RL 206		
		Ring sticking (Rings 1 & 2)						
		Average of all 8 rings	ASF	≤ 1.0	≤ 1.2	≤ 1.0		
		Max. for any 1 st ring	ASF	≤ 1.0	≤ 2.5	≤ 1.0		
		Max. for any 2 nd ring	ASF	0	0	0		
		EOT TBN (ISO 3771) **	mg KOH/g	Report	Report	Report		
		EOT TAN (ASTM D 664) **	mg KOH/g	Report	Report	Report		
2.9 Effects of biodiesel	CEC L-104-16 (OM646LA Bio)	Piston cleanliness	merit	≥ RL255 + 2 Report Report				
		Ring sticking **	ASF					
		Sludge **	merit					

Notes:

- (1) Footnotes referring to the following requirements in the A/B- and C-Classes:
- No. 1.2 Referring to the latest Version of the SAE J300 the minimum Viscosity for xW-20 Oils after Shearing is 6.9 cSt.
- No. 1.3.2 The CEC L-036-90 method is not yet approved for the parameter HTHS at 100°C.
- No. 1.6, 1.7, 1.8 Maximum limits. Values take into account method and production tolerances.
- No. 1.6; 1.7 Internal standard method has to be used.
- No. 1.10 For Categories A3/B3, A3/B4, A5/B5 and C1, C2, C3, C4: Available Test data from the Predecessor-Test CEC L-039-96 may be used for ACEA 2016 instead of CEC L-112-16 under the condition that a Full L-039 Data set including RE1, RE2, RE3 & RE4 + the Daimler DBL-AEM (requirements as specified by Daimler AG), provided the requirements as specified in ACEA 2012 are met.
- No. 2.1, 2.6, 2.9 ** Parameter is not an official CEC Parameter.
- No. 2.2 The limits shown are based on those applied in U.S. market requirements. ACEA will continuously review the situation to ensure that these limits are Alternatively, Sequence VH test may be used with limits as defined for API SN: Average engine sludge, merits: 7.6 (min); Average rocker cover sludge, merits: 7.7 (min); Average engine varnish, merits: 8.6 (min); Average piston skirt varnish, merits: 7.6 (min); Oil screen clogging, % area: Rate & Report; Hot-stuck compression rings: None. The limits shown are based on those applied in U.S. market requirements. ACEA will continuously review the situation to ensure that these limits are appropriate for European vehicles and lubricants.
- No. 2.3 The CEC L-038-94 (TU3M) Test was removed from these Oil Sequences since hardware will run out in early 2017. However, in order to assure/support Wear Protection although TU3 is removed, ACEA intends to introduce the ASTM Seq. IVB Test as a TU3-Successor regarding valve train wear with the next Oil Sequences Revision, with Limits for Seq. IVB then to be defined based on ILSAC Spec.
- No. 2.4 Until the new CEC Test Method L-107 is fully developed, the Gasoline Sludge Protection Performance of Engine Oil Formulations must be proven by the M271 Sludge Test procedure as described by Daimler AG. Test results obtained by the M271 procedure will be accepted only under the condition that they come from Test Rigs being referenced and quality controlled by Daimler AG. Limits are based on the same Reference Oil as with the old M111 Sludge Test. Once the L-107 Procedure is fully CEC-approved, the L-107 may be used, with limits officially communicated by ACEA.
- No. 2.8 Daimler M271 Sludge Reference Oil has changed from RL140 to RL261. ACEA claims may be demonstrated using either RL140 or RL261. The limits applicable to each reference oil are given above.
- * Test Report must give measured values before & after the test, all measurements to be taken in the same lab.
- Note: EOT TAN is considered to become performance criteria in the future. Any test run prior to the publication of the ACEA 2012 Oil Sequences can be used whether or not it has data for EOT TAN.

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2016
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				E4-16	E6-16	E7-16	E9-16
1. Laboratory tests							
1.1 Viscosity grades		SAE J300 Latest Active Issue		No restriction except as defined by shear stability and HTHS requirements. Manufacturers may indicate specific viscosity requirements related to ambient temperature.			
1.2 Shear stability	CEC L-014-93 or ASTM D6278 or ASTM D7109	Viscosity after 30 cycles measured at 100°C	mm²/s	Stay in grade			
	ASTM D7109	Viscosity after 90 cycles measured at 100°C	mm²/s		Stay in grade		
1.3 HTHS viscosity	CEC L-036-90	Dynamic Viscosity at 150°C and Shear Rate of 10 ⁶ s ⁻¹	mPa.s	≥ 3.5			
		Dynamic Viscosity at 100°C and Shear Rate of 10 ⁶ s ⁻¹	mPa.s	Report			
1.4 Evaporative loss (Noack)	CEC L-040-93	Max. weight loss after 1 h at 250°C	%	≤ 13			
1.5 Sulfated ash	ASTM D874		% m/m	≤ 2.0	≤ 1.0	≤ 2.0	≤ 1.0
1. 6 Phosphorus	ASTM D5185		% m/m		≤ 0.08		≤ 0.12
1.7 Sulphur	ASTM D5185		% m/m		≤ 0.3		≤ 0.4
1.8 *Oil / Elastomer compatibility	CEC L-112-16	Max. variation of characteristics after immersion for 7 days in fresh oil without pre-ageing		Elastomer type			
		Tensile strength	%	RE6 Report	RE7 Report	RE8 Report	RE9 Report
		Elongation at rupture	%	-70 / +20	-65 / +15	-51 / +9	-65 / +19
		Volume variation	%	-5.5 / +2.1	-1.8 / +8.9	-0.0 / +12.0	-2.5 / +16.0
1.9 Foaming tendency	ASTM D892 without option A	Tendency - stability	ml	Sequence I (24°C) 10 - nil Sequence II (94°C) 50 - nil Sequence III (24°C) 10 - nil			Sequence I 10/0 Sequence II 20/0 Sequence III 10/0
1.10 High temperature foaming tendency	ASTM D6082	Tendency - stability	ml	Sequence IV (150°C) 200 - 50			

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2016
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				E4-16	E6-16	E7-16	E9-16
1. Laboratory tests							
1.11 Oxidation	CEC-L-085-99 (PDSC)	Oxidation induction time	min.	≥ 65			
1.12 Corrosion	ASTM D6594 (HTCBT)	Copper increase	ppm	Report		Report	≤ 20
		Lead increase	ppm	Report		≤ 100	≤ 100
		Copper strip rating	max	Report		Report	3
1.13 *TBN	ASTM D2896		mg KOH/g	≥ 12	≥ 7	≥ 9	≥ 7
1.14 Low-temperature pumpability		MRV					
	CEC L-105-12	Yield stress (MRV at SAE J300 temperatures applicable for fresh oil viscosity grade)					
1.15 Oil oxidation with biodiesel		Oil oxidation at 168h (DIN 51453)	A/cm	≤ 90	≤ 80	≤ 120	≤ 90
	CEC L-109-14	Viscosity increase, relative at 168h (delta KV100)	%	≤ 130	≤ 130	≤ 300	≤ 150

Notes:
* Additional information is given as footnotes underneath the table for the E-categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2016
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				E4-16	E6-16	E7-16	E9-16
2. Engine tests							
2.1 *Wear	CEC L-099-08 (OM 646LA)	Cam wear outlet (avg. Max. wear 8 cams)	µm	≤ 140	≤ 140	≤ 155	≤ 155
2.2 *Soot in oil	ASTM D5967 (Mack T8-E)	Test duration 300 h, Relative viscosity at 4.8% soot and 50% shear loss, 1 test / 2 test avg / 3 test average	mm²/s	≤ 2.1 / 2.2 / 2.3			
2.3 *Bore polishing Piston cleanliness	CEC L-101-08 (OM50ILA)	Piston Cleanliness, average	merit	≥ 26		≥ 17	
		Bore polishing, average **	%	≤ 1.0		≤ 2.0	
		Oil consumption **	kg/test	≤ 9		≤ 9	
		Engine sludge, average **	merit	Report		Report	
2.4 *Soot-induced wear	ASTM D7468 (Cummins ISM)	Merit		-		-	≥ 1000
		Crosshead weight loss	mg	-		≤ 7.5 / 7.8 / 7.9	≤ 7.1
		1 test / 2 test avg / 3 test avg Oil filter diff. press at 150h	kPa	-		≤ 55 / 67 / 74	≤ 19
		1 test / 2 test avg / 3 test avg Engine sludge	merit	-		≥ 8.1 / 8.0 / 8.0	≥ 8.7
		1 test / 2 test avg / 3 test avg Adj. screw weight loss	mg	-			≤ 49
2.5 *Wear (liner-ring-bearings)	ASTM D7422 (Mack T-12)	Merit		-	≥ 1000		≥ 1000
		Cylinder liner wear (CLW)	µm	-	≤ 26		≤ 24
		Top ring weight loss (TRWL)	mg	-	≤ 117		≤ 105
		End of test lead	ppm	-	≤ 42		≤ 35
		Δ lead 250 h -300 h	ppm	-	≤ 18		≤ 15
		Oil consumption (phase II)	g/h	-	≤ 95		≤ 85

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2016
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				E4-16	E6-16	E7-16	E9-16
2. Engine tests							
2.6 Biofuel impacted piston cleanliness and engine sludge	CEC L-104-16 (OM646LA Bio)	Piston cleanliness	merit	-	≥ RL255 + 4	-	≥ RL255 + 2
		Ring sticking **	ASF	-	Report	-	Report
		Engine Sludge, average **	merit	-	Report	-	Report

Notes:

* Footnotes referring to the following requirements in the E-Class:

No. 18 Full Data sets being obtained on CEC L-039-96 + the Daimler requirements for DBL-AEM as specified by Daimler AG can be used instead of CEC L-112-16, provided the requirements as specified in ACEA 2012 are met.

No. 113 For E7, values < 9.00 are not accepted.

No. 21 Additional parameters may be included once approved by CEC.

No. 2,2 Mack T11 results obtained as part of an API CI-4, CI-4 plus, CJ-4, CK-4 or FA-4 approval program, can be used in place of Mack T8E.

No. 2,3, 2,6 ** Not CEC approved parameters.

No. 2,4 Merit number shall be calculated according to the API CI-4 specification.

No. 2,5 For E6 & E7 merit number shall be calculated according to the API CI-4 specification.

For E6 & E7 Mack T10 results obtained as part of an API CI-4 or CI-4 plus approval program, can be used in place of Mack T12.

Mack T-12 Cylinder Liner Wear and Top Ring Weight Loss results obtained as part of an API CK-4 or FA-4 approval program,

which includes a passing Volvo T-13 at the API CK-4 or API FA-4 level, may be used to satisfy the requirements of the Mack T-12 in the ACEA Oil Sequences.

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2012
------	--	-----------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits				
				A1/B1-12	A3/B3-12	A3/B4-12	A5/B5-12	
1. Laboratory tests								
1.1 Viscosity grades		SAE J300 Latest Active Issue		No restriction except as defined by shear stability and HTHS requirements. Manufacturers may indicate specific viscosity requirements related to ambient temperature				
1.2 *Shear stability	CEC L-014-93 (Bosch Injector) or ASTM D6278	Viscosity after 30 cycles measured at 100°C	mm²/s	xW-20 ≥ 5.6 xW-30 ≥ 9.3 xW-40 ≥ 12.0	All grades to be stay in grade			
1.3 Viscosity at high temperature & high shear rate	CEC-L-036-90 (2 nd Edition)	Viscosity at 150°C and 10 ⁶ s ⁻¹ Shear rate	mPa.s	≥2.9 and ≤3.5 xW-20: 2.6 min.	≥ 3.5		≥ 2.9 and ≤3.5	
1.4 Evaporative loss	CEC-L-040-93 (Noack)	Max. weight loss after 1 h at 250°C	%	≤ 13				
1.5 TBN	ASTM D 2896		mg KOH/g	≥ 8.0	≥ 8.0	≥ 10.0	≥ 8.0	
1.6 *Sulphur	ASTM D5185		% m/m	Report				
1.7 *Phosphorus	ASTM D5185		% m/m	Report				
1.8 *Sulfated ash	ASTM D874		% m/m	≤ 1.3	≥ 0.9 and ≤ 1.5	≥ 1.0 and ≤ 1.6	≤ 1.6	
1.9 Chlorine	ASTM 6443		% m/m	Report				
1.10 *Oil / Elastomer compatibility	CEC-L-039-96	Max. variation of characteristics after immersion for 7 days in fresh oil without pre-ageing		Elastomer type				
				RE1 FLUORO	RE2-99 ACM	RE3-04 SILICONE	RE4 NBR	DBL-AEM
		Hardness DIDC	points	-1 / +5	-5 / +8	-22 / +1	-5 /+5	+5 / +10
		Tensile strength	%	-40 / +10	-15 / +18	-30 / +10	-20 / +10	-35 / -
		Elongation at rupture	%	-50 / +10	-35 / +10	-20 / +10	-50 / +10	-50 / -
		Volume variation	%	-1 / +5	-7 / +5	-1 / +22	-5 / +5	-5 / +15
1.11 Foaming tendency	ASTM D892 without option A	Tendency - stability	ml	Sequence I (24°C) 10 – nil Sequence II (94°C) 50 – ni Sequence III (24°C) 10 – nil				

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2012
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				A1/B1-12	A3/B3-12	A3/B4-12	A5/B5-12
1. Laboratory tests							
1.12 High temperature foaming tendency	ASTM D6082 High temperature foam test	Tendency – stability	ml	Sequence IV (150°C) 100 – nil			
1.13 *Oxidation in presence of biodieselw	GFC-Lu-43A-11	Catalysed ageing test until 144h at 170°C & with air bubbling: 1. on pure oil 2. with B10 added (B71 1892 GO B10 LUB) PAI at 144h Kin. Viscosity at 100°C variation: - at 72h - at 96h - at 120h - at 144h	% cST & % cST & % cST & % cST & %				Report Report Report Report and at 144 h: < +200% (no solidification)
1.14 Low-temperature pumpability	CEC L-105	MRV at SAE J300 temperatures applicable for fresh oil viscosity grade		Acc to SAE J300 for fresh oil		Acc to SAE J300 for fresh oil	Acc to SAE J300 for fresh oil
		Viscosity	mPa.s				
		Yield stress	Pa				

Notes:
* Additional information is given as footnotes underneath the table for the C-categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2012
------	--	-----------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				A1/B1-12	A3/B3-12	A3/B4-12	A5/B5-12
2. Engine tests							
2.1 High temperature deposits Ring sticking oil thickening	CEC-L-088-02 (TU5JP-L4) 72 Hour test	Ring sticking (each part)	merit	≥ 9.0			
		Piston varnish (5 elements, average of 4 pistons)	merit	≥ RL 216			
		Absolute viscosity increase at 40°C between min and max values during test	mm²/s	≤ 0.8 x RL 216			
		Oil consumption	kg/test	Report			
2.2 *Low temperature sludge	ASTM D6593-00 (Sequence VG) Under protocol & requirements for API	Average engine sludge	merit	≥ 7.8			
		Rocker cover sludge	merit	≥ 8.0			
		Average piston skirt varnish	merit	≥ 7.5			
		Average engine varnish	merit	≥ 8.9			
		Comp. ring (hot stuck)		None			
		Oil screen clogging	%	≤ 20			
2.3 Valve train scuffing wear	CEC-L-038-94 (TU3M)	Cam wear, average	µm	≤ 10			
		Cam wear, max.	µm	≤ 15			
		Pad merit (avg. of 8 pads)	merit	≥ 7.5			
2.4 *Black sludge		Engine sludge, average	merit	≥ RL140 + 4σ			
2.5 *Fuel economy	CEC-L-054-96 (M111)	Fuel economy improvement vs. reference oil RL 191 (15W40)	%	≥ 2.5	-		≥ 2.5
2.6 Medium temperature dispersivity	CEC-L-093-04 (DV4TD) To be replaced by DV6C	Absolute viscosity increase at 100°C and 6% soot	mm²/s	≤ 0.60 x RL 223 result			
		Piston merit	merit	≥ (RL 223 minus 2.5 pts)			
2.7 *DV6C oil dispersion at medium temperature for passenger car direct injection diesel engines	CEC L-106 (DV6C)	Absolute viscosity increase at 100°C and 6% soot	mm²/s				
		Piston merit	merit	Limits to defined			

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines	Dec. 2012
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				A1/B1-12	A3/B3-12	A3/B4-12	A5/B5-12
2. Engine tests							
2.8 *Wear	CEC-L-099-08 (OM646LA)	Cam wear outlet (avg. max. wear 8 cams)	µm	≤ 120	≤ 140	≤ 120	
		Cam wear inlet (avg. max. 8 cams)	µm	≤ 100	≤ 110	≤ 100	
		Cylinder wear (avg. 4 cyl.)	µm	≤ 5.0	≤ 5.0	≤ 5.0	
		Bore polishing (13mm) (max of 4 cyl.)	%	≤ 3.0	≤ 3.5	≤ 3.0	
		Tappet wear inlet (avg. max. wear 8 cams)	µm	Report	Report	Report	
		Tappet outlet wear (avg. max.wear 8 cams)	µm	Report	Report	Report	
		Piston cleanliness (avg. 4 pistons)	merit	Report	Report	≥ 12	
		Engine sludge avg.	merit	Report	Report	≥ 8.8	
2.9 *DI diesel piston cleanliness & ring sticking	CEC-L-078-99 (VW DI)	Piston cleanliness	merit	≥ RL 206	≥ RL 206 minus 4 points	≥ RL 206	≥ RL 206
		Ring sticking (Rings 1 & 2)					
		Average of all 8 rings	ASF	≤ 1.0	≤ 1.2	≤ 1.0	≤ 1.0
		Max. for any 1 st ring	ASF	≤ 1.0	≤ 2.5	≤ 1.0	≤ 1.0
		Max. for any 2 nd ring	ASF	0.0	0.0	0.0	0.0
		EOT TBN (ISO 3771)	mg KOH/g	≥ 4.0	≥ 4.0	≥ 6.0	≥ 4.0
		EOT TAN (ASTM D 664)	mg KOH/g	Report	Report	Report	Report
2.10 *Effects of bio-diesel	CEC L-104	Piston cleanliness	merit			Report	
		Ring sticking	ASF			Report	
		Sludge	merit			Report	

Notes:
* Additional information is given as footnotes underneath the table for the C-categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2012
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
 Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits				
				C1-12	C2-12	C3-12	C4-12	
1. Laboratory tests								
1.1 Viscosity grades		SAE J300 Latest Active Issue		No restriction except as defined by shear stability and HTHS requirements. Manufacturers may indicate specific viscosity requirements related to ambient temperature.				
1.2 *Shear stability	CEC L-014-93 or ASTM D6278	Viscosity after 30 cycles measured at 100°C	mm²/s	All grades to be stay in grade				
1.3 Viscosity at high temperature & high shear rate	CEC-L-036-90	Viscosity at 150°C and 10 ⁶ s ⁻¹ Shear rate	mPa.s	≥2.9		≥3.5		
1.4 Evaporative loss	CEC-L-040-93 (Noack)	Max. weight loss after 1 h at 250°C	%	≤ 13			≤ 11	
1.5 TBN	ASTM D 2896		mg KOH/g	-		≥ 6.0		
1.6 *Sulphur	ASTM D5185		% m/m	≤ 0.2	≤ 0.3		≤ 0.2	
1.7 *Phosphorus	ASTM D5185		% m/m	≤ 0.05	≤ 0.09	≥ 0.07 and ≤ 0.09		
1.8 *Sulfated ash	ASTM D874		% m/m	≤ 0.5	≤ 0.8		≤ 0.5	
1.9 Chlorine	ASTM 6443		ppm m/m	Report				
1.10 *Oil / Elastomer compatibility	CEC-L-039-96	Max. variation of characteristics after immersion for 7 days in fresh oil without pre-ageing		Elastomer type				
				RE1 FLUORO	RE2-99 ACM	RE3-04 SILICONE	RE4 NBR	DBL-AEM
		Hardness DIDC	points	-1 / +5	-5 / +8	-25 / +1	-5 / +5	-5 / +10
		Tensile strength	%	-50 / +10	-15 / +18	-45 / +10	-20 / +10	-35 / -
		Elongation at rupture	%	-60 / +10	-35 / +10	-20 / +10	-50 / +10	-50 / -
		Volume variation	%	-1 / +5	-7 / +5	-1 / +30	-5 / +5	-5 / +15
1.11 Foaming tendency	ASTM D892 without option A	Tendency - stability	ml	Sequence I (24°C) 10 – nil Sequence II (94°C) 50 – nil Sequence III (24°C) 10 – nil				

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2012
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				C1-12	C2-12	C3-12	C4-12
1. Laboratory tests							
1.12 High temperature foaming tendency	ASTM D6082 High temperature foam test	Tendency – stability	ml	Sequence IV (150°C) 100 – nil			
1.13 *Oxidation in presence of biodieselw	GFC-Lu-43A-11	Catalysed ageing test until 144h at 170°C & with air bubbling: 1. on pure oil 2. with B10 added (B71 1892 GO B10 LUB) PAI at 144h Kin. Viscosity at 100°C variation: - at 72h - at 96h - at 120h - at 144h	% cST & % cST & % cST & % cST & %	Report Report Report Report Report and at 144 h: < +200% (no solidification)			
1.14 Low-temperature pumpability	CEC L-105	MRV at SAE J300 temperatures applicable for fresh oil viscosity grade		Acc to SAE J300 for fresh oil			
		Viscosity	mPa.s				
		Yield stress	Pa				

Notes:

* Additional information is given as footnotes underneath the table for the C-categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2012
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				C1-12	C2-12	C3-12	C4-12
2. Engine tests							
2.1 High temperature deposits Ring sticking oil thickening	CEC-L-088-02 (TU5JP-L4) 72 Hour test	Ring sticking (each part)	merit	≥ 9.0			
		Piston varnish (5 elements, average of 4 pistons)	merit	≥ RL 216			
		Absolute viscosity increase at 40°C between min and max values during test	mm²/s	≤ 0.8 x RL 216			
		Oil consumption	kg/test	Report			
2.2 *Low temperature sludge	ASTM D6593-00 (Sequence VG) Under protocol & requirements for API	Average engine sludge	merit	≥ 7.8			
		Rocker cover sludge	merit	≥ 8.0			
		Average piston skirt varnish	merit	≥ 7.5			
		Average engine varnish	merit	≥ 8.9			
		Comp. ring (hot stuck)		None			
		Oil screen clogging	%	≤ 20			
2.3 Valve train scuffing wear	CEC-L-038-94 (TU3M)	Cam wear, average	µm	≤ 10			
		Cam wear, max.	µm	≤ 15			
		Pad merit (avg. of 8 pads)	merit	≥ 7.5			
2.4 *Black sludge		Engine sludge, average	merit	≥ RL140 + 4σ			
2.5 *Fuel economy	CEC-L-054-96 (M111)	Fuel economy improvement vs. reference oil RL 191 (15W40)	%	≥ 3.0	≥ 2.5	≥ 1.0 (for xW-30 grades)	
2.6 Medium temperature dispersivity	CEC-L-093-04 (DV4TD)" To be replaced by DV6C	Absolute viscosity increase at 100°C and 6% soot	mm²/s	≤ 0.60 x RL 223 result			
		Piston merit	merit	≥ (RL 223 minus 2.5 pts)			
2.7 *DV6C oil dispersion at medium temperature for passenger car direct injection diesel engines ⁽¹⁾	CEC L-106 (DV6C)	Absolute viscosity increase at 100°C and 6% soot	mm²/s				
		Piston merit	merit	Limits to defined			

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2012
------	---	-----------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				C1-12	C2-12	C3-12	C4-12
2. Engine tests							
2.8 *Wear	CEC-L-099-08 (OM646LA)	Cam wear outlet (avg. max. wear 8 cams)	µm	≤ 120	≤ 120		≤ 120
		Cam wear inlet (avg. max. 8 cams)	µm	≤ 100	Report		≤ 100
		Cylinder wear (avg. 4 cyl.)	µm	≤ 5.0	≤ 5.0		≤ 5.0
		Bore polishing (13mm) (max of 4 cyl.)	%	≤ 3.0	≤ 3.0		≤ 3.0
		Tappet wear inlet (avg. max. wear 8 cams)	µm	Report	Report		Report
		Tappet outlet wear (avg. max.wear 8 cams)	µm	Report	Report		Report
		Piston cleanliness (avg. 4 pistons)	merit	Report	Report		≥ 12
		Engine sludge avg.	merit	Report	Report		≥ 8.8
2.9 *DI diesel piston cleanliness & ring sticking	CEC-L-078-99 (VW DI)	Piston cleanliness	merit	≥ RL 206	≥ RL 206		≥ RL 206
		Ring sticking (Rings 1 & 2)					
		Average of all 8 rings	ASF	≤ 1.0	≤ 1.2		≤ 1.0
		Max. for any 1 st ring	ASF	≤ 1.0	≤ 2.5		≤ 1.0
		Max. for any 2 nd ring	ASF	0.0	0.0		0.0
		EOT TBN (ISO 3771)	mg KOH/g	Report	Report		Report
		EOT TAN (ASTM D 664)	mg KOH/g	Report	Report		Report

ACEA	ACEA 2016 European oil sequence for service-fill oils for gasoline and diesel engines with after treatment devices	Dec. 2012
-------------	---	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				C1-12	C2-12	C3-12	C4-12
2. Engine tests							
2.10 *Effects of bio-diesel	CEC L-104	Piston cleanliness	merit			Report	
		Ring sticking	ASF			Report	
		Sludge	merit			Report	

Notes:

- * Footnotes referring to the following requirements in the A/B- and C-Classes:
- No. 12 The minimum viscosity for xW-20 oils after shearing is 5.6 cSt.
- No. 1.6; 1.7; 1.8 Maximum limits. Values take into account method and production tolerances
- No. 1.6; 1.7 Internal standard method has to be used.
- No. 1.10 All reference materials and limits for RE1, RE2, RE3, RE4 and DBL-AEM can be used until acceptable new reference materials (proposed from CEC L-039-96) are available and appropriate limits have been set. The Daimler requirements for DBL-AEM D (proposed from CEC L-039-96) are available and appropriate limits have been set. The Daimler requirements for DBL-AEM D 8948/200 are VDA 675301, 7 days $\pm 2h$, 150°C $\pm 2^\circ C$, closed cup test.
- RE-1, RE-2, RE-3, RE-4 based on CEC and DBL-AEM based on Daimler AG data may continue to be used "grandfathered" for the lifetime of the ACEA 2012 sequences.
- On April 16, 2016 ACEA issued a clarification advising that CEC has declared the CEC L-039-96 test method to be out of control in respect of the elastomers RE3 (VMQ) and RE4 (NBR). Those elastomers are therefore deleted from the CEC L-039-96 test method and the CEC test method has been updated accordingly."
- No. 113 Until a CEC Test Method is developed, the oxidation behavior of engine oil formulations must be proved by GFC-Lu-43A-11. Test results obtained by this procedure will be accepted under the condition that they come from labs having participated to the official round robin and comply with the quality criteria of GFC.
- No. 2.2 The limits shown are based on those applied in U.S. market requirements. ACEA will continuously review the situation to ensure that these limits are appropriate for European vehicles and lubricants.
- No. 2.4 Until a new CEC Test Method is developed, the gasoline sludge protection performance of engine oil formulations must be proved by the M 271 sludge test procedure as described by Daimler AG. Test results obtained by the M 271 procedure will be accepted under the condition that they come from test rigs being referenced and quality controlled by Daimler AG.
- M111 SL data, in place of M271 data, can be used to support a claim against the ACEA 2012 Sequences concerning the sludge requirement.
- Limits are based on the same reference oil as with the old M111 sludge test.
- No. 2.5 ACEA considers the CEC L-54-T-96 test the only valid comparator against which claims of lubricant fuel economy improvement should be made.
- No. 2.7 May be performed as soon as it becomes available as an alternative to the DV4 test. ACEA will decide when the DV4 test will be finally deleted from this specification.
- CEC-L-093-04 (DV4 Test) test results obtained in accordance with the ATIEL guidelines may be used by a grandfathering process also after this test has become unavailable to run and is replaced by the CEC-L-106 (DV6 Test) procedure.
- No. 2.8 Not all parameters are yet official CEC parameters. C2 limit for inlet cam wear under definition.
- No. 2.9 Test report has to give measured values before & after the test, all measurements to be taken in the same lab.
- Note: TAN is considered to become performance criteria in the future. Not all parameters are yet official CEC parameters.
- Any test run prior to the publication of the ACEA 2012 Sequences can be used whether or not it has EOT TAN. Test run since the ACEA 2012 Sequences became active on 1 December 2012 require VWTDI EOT TAN.
- No. 2.10 Test is still under development at the time of publishing of this specification.
- Test has to be performed for all qualifications against 2012 Oil Sequences from the time the test is officially released by CEC (running programs only).
- All test criteria is rate and report.

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2012
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits						
				E4-12	E6-12	E7-12	E9-12			
1. Laboratory tests										
1.1 Viscosity grades		SAE J300 Latest Active Issue		No restriction except as defined by shear stability and HTHS requirements. Manufacturers may indicate specific viscosity requirements related to ambient temperature.						
1.2 Shear stability	CEC-L-014-93 (Bosch Injector) or ASTM D6278	Viscosity after 30 cycles measured at 100°C	mm²/s	Stay in grade						
	ASTM D6278	Viscosity after 90 cycles measured at 100°C	mm²/s		Stay in grade					
1.3 Viscosity at high temperature & high shear rate	CEC L-036-90	Viscosity at 150°C and 10 ⁶ s ⁻¹ Shear rate	mPa.s	≥ 3.5						
1.4 Evaporative loss	CEC L-040-93 (Noack)	Max. weight loss after 1 h at 250°C	%	≤ 13						
1.5 Sulfated ash	ASTM D874		% m/m	≤ 2.0	≤ 1.0	≤ 2.0	≤ 1.0			
1. 6 *Phosphorus	ASTM D5185		% m/m		≤ 0.08		≤ 0.12			
1.7 *Sulphur	ASTM D5185		% m/m		≤ 0.3		≤ 0.4			
1.8 *Oil / Elastomer compatibility	CEC-L-039-96	Max. variation of characteristics after immersion for 7 days in fresh oil without pre-ageing		Elastomer type						
				RE1 FLUORO	RE2-99 ACM	RE3-04 SILICONE	RE4 NBR	DBL-AEM		
				Hardness DIDC	points	-1 / +5	-5 / +8	-22 / +1	-5 / +5	+5 / +10
				Tensile strength	%	-40 / +10	-15 / +18	-30 / +10	-20 / +10	-35 / -
				Elongation at rupture	%	-50 / +10	-35 / +10	-20 / +10	-50 / +10	-50 / -
				Volume variation	%	-1 / +5	-7 / +5	-1 / +22	-5 / +5	-5 / +15
1.9 Foaming tendency	ASTM D892 without option A	Tendency - stability	ml	Sequence I (24°C) 10 - nil Sequence II (94°C) 50 - nil Sequence III (24°C) 10 - nil			Sequence I 10/0 Sequence II 20/0 Sequence III 10/0			
1.10 High temperature foaming tendency	ASTM D6082	Tendency - stability	ml	Sequence IV (150°C) 200 - 50						

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2012
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				E4-12	E6-12	E7-12	E9-12
1. Laboratory tests							
1.11 Oxidation	CEC-L-085-99 (PDSC)	Oxidation induction time	min.	R&R		≥ 65	
1.12 Corrosion	ASTM D6594 (HTCBT)	Copper increase	ppm	R&R		R&R	≤ 20
		Lead increase	ppm	R&R		≤ 100	≤ 100
		Copper strip rating	max	R&R		R&R	3
1.13 *TBN	ASTM D2896		mg KOH/g	≥ 12	≥ 7	≥ 9	≥ 7
1.14 Low-temperature pumpability	CEC L-105	MRV at SAE J300 temperatures applicable for fresh oil viscosity grade		Acc to SAE J300 for fresh oil			
		Viscosity	mPa.s				
		Yield stress	Pa				

Notes:

* Additional information is given as footnotes underneath the table for the E-engine test categories.

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2012
------	--	-----------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				E4-12	E6-12	E7-12	E9-12
2. Engine tests							
2.1 *Wear	CEC L-099-08 (OM 646LA)	Cam wear outlet (avg. Max. wear 8 cams)	µm	≤ 140	≤ 140	≤ 155	≤ 155
2.2 *Soot in oil	ASTM D5967 (Mack T8-E)	Test duration 300 h, Relative viscosity at 4.8% soot and 50% shear loss, 1 test / 2 test avg / 3 test avg	mm²/s	≤ 2.1 / 2.2 / 2.3	≤ 2.1 / 2.2 / 2.3	≤ 2.1 / 2.2 / 2.3	
2.3 Soot in oil	Mack T-11 (ASTM D7156)	Min TGA soot @ 4.0 cSt (100°C)	%				3.5 / 3.4 / 3.3
		Min TGA soot @ 12.0 cSt (100°C)	%				6.0 / 5.9 / 5.9
		Min TGA soot @ 15.0 cSt (100°C)	%				6.7 / 6.6 / 6.5
2.4 *Bore polishing Piston cleanliness	CEC L-101-08 (OM501LA)	Bore polishing, average	%	≤ 1.0	≤ 1.0	≤ 2.0	≤ 2.0
		Piston Cleanliness, average	merit	≥ 26	≥ 26	≥ 17	≥ 17
		Oil consumption	kg/test	≤ 9	≤ 9	≤ 9	≤ 9
		Engine sludge, average	merit	R&R	R&R	R&R	R&R
2.5 *Soot-induced wear	Cummins ISM (ASTM D7468)	Merit					≥ 1000
		Rocker pad avg weight loss at 3.9% soot	mg			≤ 7.5 / 7.8 / 7.9	≤ 7.1
		1 test / 2 test avg / 3 test avg Oil filter diff.press at 150h	kPa			≤ 55 / 67 / 74	≤ 19
		1 test / 2 test avg / 3 test avg Engine sludge	merit			≥ 8.1 / 8.0 / 8.0	≥ 8.7
		1 test / 2 test avg / 3 test avg Adj, screw weight loss	mg				≤ 49

ACEA	ACEA 2016 European oil sequence for service-fill oils for heavy duty diesel engines	Dec. 2012
-------------	--	------------------

This sequence defines the minimum quality level of a product for self-certification to EELQMS and for presentation to ACEA members.
Performance parameters other than those covered by the tests shown or more stringent limits may be indicated by individual member companies.

Requirements	Test method	Properties	Unit	Limits			
				E4-12	E6-12	E7-12	E9-12
2. Engine tests							
2.6 *Wear (liner-ring-bearings)	Mack T-12 (ASTM D7422)	Merit		-	≥ 1000	≥ 1000	≥ 1000
		Avg. liner wear	µm	-	≤ 26	≤ 26	≤ 24
		Average top ring weight loss	mg	-	≤ 117	≤ 117	≤ 105
		End of test lead	ppm	-	≤ 42	≤ 42	≤ 35
		Δ lead 250-300 hrs	ppm	-	≤ 18	≤ 18	≤ 15
		Oil consumption (phase II)	g/hr	-	≤ 95	≤ 95	≤ 85

Notes:

- (1) Footnotes referring to the following requirements in the E-Class:
 No. 1.6; 1.7 Internal standard method has to be used.
 No. 1.8 All reference materials and limits for RE1, RE2, RE3, RE4 and DBL-AEM can be used until acceptable new reference materials (proposed from CEC L-039-96) are available and appropriate limits have been set.
 The Daimler requirements for DBL-AEM D (proposed from CEC L-039-96) are available and appropriate limits have been set.
 The Daimler requirements for DBL-AEM D 8948/200 are VDA 675301, 7 days ± 2h, 150°C ± 2°C, closed cup test.
 RE-1, RE-2, RE-3, RE-4 based on CEC and DBL-AEM based on Daimler AG data may continue to be used "grandfathered" for the lifetime of the ACEA 2012 sequences.
 On April 16, 2016 ACEA issued a clarification advising that CEC has declared the CEC L-039-96 test method to be out of control in respect of the elastomers RE3 (VMQ) and RE4 (NBR). Those elastomers are therefore deleted from the CEC L-039-96 test method and the CEC test method has been updated accordingly.
 For E7, values < 9.00 are not accepted.
 No. 113 OM602A data can be used instead of OM646LA data providing it meets the requirements as specified in the 2007 ACEA sequences.
 No. 21 Additional parameters may be included once approved by CEC.
 No. 2.2 Mack T11 results obtained as part of an API CI-4, CI-4 plus or API CJ-4 approval program, can be used in place of Mack T8E.
 No. 2.4 Bore polish, oil consumption and engine sludge are non-approved CEC parameters.
 OM441LA data can be used instead of OM501LA data providing it meets the requirements as specified in the 2007 ACEA sequences.
 No. 2.5 For E7 results from M11HST (ASTM D6838), at API CH-4, or M11EGR (ASTM D6975), at API CI-4 or CI-4 Plus, can be used in place of Cummins ISM. Merit number shall be calculated according to the API CI-4 specification.
 No. 2.6 For E6 & E7 merit number shall be calculated according to the API CI-4 specification.
 For E6 & E7 Mack T10 results obtained as part of an API CI-4 or CI-4 plus approval program, can be used in place of Mack T12.

**China GB,
Global DHD-1,
JASO HD-DL
and US Military
requirements
for diesel
engine oils**



GB 11121 - 2006 (#) - Passenger car gasoline engine oil

- 1 -



PERFORMANCE CATEGORY		SE	SF	SG	SH	SJ	SL	GF-1 ⁽²⁾	GF-2 ⁽²⁾	GF-3 ⁽²⁾
	Viscosity grades ⁽¹⁾	0W-20, 0W-30, 5W-20, 5W-30, 5W-40, 5W-50, 10W-30, 10W-40, 10W-50, 15W-30, 15W-40, 15W-50, 20W-40, 20W-50, 30, 40, 50								
Viscosity at 100°C (ASTM D445) ⁽³⁾ , mm²/s		SAE J300 ⁽¹⁾								
Low temp cranking (ASTM D5293), mPa.s, max.	0W-xx	3250 (-30°C)	6200 (-35°C)	6200 (-35°C)	6200 (-35°C)	6200 (-35°C)	6200 (-35°C)	6200 (-35°C)	6200 (-35°C)	6200 (-35°C)
	5W-xx	3500 (-25°C)	6600 (-30°C)	6600 (-30°C)	6600 (-30°C)	6600 (-30°C)	6600 (-30°C)	6600 (-30°C)	6600 (-30°C)	6600 (-30°C)
	10W-xx	3500 (-20°C)	7000 (-25°C)	7000 (-25°C)	7000 (-25°C)	7000 (-25°C)	7000 (-25°C)	3500 (-20°C)	3500 (-20°C)	7000 (-25°C)
	15W-xx	3500 (-15°C)	7000 (-20°C)	7000 (-20°C)	7000 (-20°C)	7000 (-20°C)	7000 (-20°C)	7000 (-20°C)	7000 (-20°C)	7000 (-20°C)
	20W-xx	4500 (-10°C)	9500 (-15°C)	9500 (-15°C)	9500 (-15°C)	9500 (-15°C)	9500 (-15°C)	9500 (-15°C)	9500 (-15°C)	9500 (-15°C)
Viscosity index (ASTM D2270), min.	xW-xx	-								
	30	75								
	40, 50	80								
Pour point (ASTM D97), °C, max.	0W-xx	-40	-40							
	5W-xx	-35	-35							
	10W-xx	-30	-30							
	15W-xx	-23	-25							
	20W-xx	-18	-20							
	30	-15	-15							
	40	-10	-10							
	50	-5	-5							
Borderline pumping temperature (ASTM D3829), °C, max.	0W-xx	-35	-							
	5W-xx	-30	-							
	10W-xx	-25	-							
	15W-xx	-20	-							
	20W-xx	-15	-							
Low temperature pumping viscosity (ASTM D4684), mPa.s, max.(no yield stress)	0W-xx	-	60000 (-40°C)	60000 (-40°C)	60000 (-40°C)	60000 (-40°C)	60000 (-40°C)	60000 (-40°C)	60000 (-40°C)	60000 (-40°C)
	5W-xx	-	60000 (-35°C)	60000 (-35°C)	60000 (-35°C)	60000 (-35°C)	60000 (-35°C)	60000 (-35°C)	60000 (-35°C)	60000 (-35°C)
	10W-xx	-	60000 (-30°C)	60000 (-30°C)	60000 (-30°C)	60000 (-30°C)	30000 (-25°C)	60000 (-30°C)	60000 (-30°C)	60000 (-30°C)
	15W-xx	-	60000 (-25°C)	60000 (-25°C)	60000 (-25°C)	60000 (-25°C)	60000 (-25°C)	60000 (-25°C)	60000 (-25°C)	60000 (-25°C)
	20W-xx	-	60000 (-20°C)	60000 (-20°C)	60000 (-20°C)	60000 (-20°C)	60000 (-20°C)	60000 (-20°C)	60000 (-20°C)	60000 (-20°C)

GB 11121 - 2006 ^(#) - Passenger car gasoline engine oil

- 2 -



PERFORMANCE CATEGORY		SE	SF	SG	SH	SJ	SL	GF-1 ⁽²⁾	GF-2 ⁽²⁾	GF-3 ⁽²⁾
	Viscosity grades ⁽¹⁾	0W-20, 0W-30, 5W-20, 5W-30, 5W-40, 5W-50, 10W-30, 10W-40, 10W-50, 15W-30, 15W-40, 15W-50, 20W-40, 20W-50, 30, 40, 50								
High temperature high shear viscosity, (ASTM D4741), mPa.s, min.	xW-20	-	2.6							
	0W-30, 5W-30, 5W-40, 10W-30, 10W-40, 15W30	-	2.9							
	5W-50, 10W-50, 15W-40, 15W-50, 20W-40, 20W-50	-	3.7							
Water (ASTM D95), %, max.		Trace (0.03)								
Mechanical impurities (ASTM D2273), wt%, max.		0.01								
Flash point (COC), (ASTM D92),°C, min.	0W-xx, 5W-xx	200								
	10W-xx	205								
	15W-xx, 20W-xx	215								
	30, 40, 50	220(30), 225(40), 230(50)								
TBN (ASTM D2896), Sulphated ash (ASTM D874), Sulfur (ASTM D4951), Nitrogen (ASTM D5762) ⁽⁴⁾		Report								
Engine test and laboratory tests corresponding API requirements (including their footnotes) ⁽⁵⁾		Yes								

Notes:

(#) Note that all P&C and bench tests are treated as critical limits by China authorities who sample finished oils from the market for quality check (although ASTM D4485 is included in 'Reference Documents'). Delivery inspections are required. Batch inspections: KV, VI, CCS, PP, impurities, water, FP, foaming, high temp. foaming, ash, TBN, Nitrogen and Phosphorus. Periodic inspections (every 6 months): volatility, borderline pumping temperature; MRV; HTHS and sulfur. Periodic inspections (once a year): gelation index, high temp. deposit, homogeneity and miscibility, filterability, L-38 or Seq. VIII.

For the latest API oil categories or other oil categories not listed in GB 11121: Lubricant manufacturers' 'Enterprise Standard' is allowed with following conditions: 'Enterprise Standard' is more stringent than GB 11121; Get approval from and keep record in local authorities.

(1) Early version of SAE J300 fresh oil properties are listed within respective category: SAE J300-1987 (corresponding to GB/T 14906-94) for SE and SF, SAE J300-1999 for other categories.

(2) GF-x specifications are obsolete under ILSAC (only the latest version is in use at any time) but adopted by GB without reference to ILSAC because there is no Energy Conserving or Resource Conserving listed in GB.

(3) Corresponding ASTM test methods are listed instead of original Chinese methods (i.e.: GB/T or SH/T) if applicable (e.g.: GB/T 265 is corresponding to ASTM D445; SH/T 260 is modified in relation to ISO 3733:1999, which is corresponding to ASTM D95).

(4) At the time of ex-factory of each batch of products, the producer shall report the actual measured value of this item to the users and dealers, if any disputes, the result of engine test shall prevail. 'Report' of phosphorus (ASTM D5185) is also required for SE & SF.

(5) The original specification tests and limits are listed but replacement tests and limits for older categories can be used. Additional requirements: Volatility for SF, use API SH/SG limits; Foaming (ASTM D892) for SE and SF; 25/0, 150/0, 25/0.

GB 11122 - 2006 ^(#) - Heavy duty diesel engine oil

- 1 -



PERFORMANCE CATEGORY		CC	CD	CF	CF-4	CH-4	CI-4 ⁽²⁾
	Viscosity grades ⁽¹⁾	0W-20, 0W-30, 0W-40, 5W-20, 5W-30, 5W-40, 5W-50, 10W-30, 10W-40, 10W-50, 15W-30, 15W-40, 15W-50, 20W-40, 20W-50, 20W-60, 30, 40, 50, 60					
Viscosity at 100°C (ASTM D445) ⁽³⁾ , mm²/s		SAE J300 ⁽¹⁾					
Low temperature cranking (ASTM D5293), mPa.s, max.	0W-xx	3250 (-30°C)		6200 (-35°C)			
	5W-xx	3500 (-25°C)		6600 (-30°C)			
	10W-xx	3500 (-20°C)		7000 (-25°C)			
	15W-xx	3500 (-15°C)		7000 (-20°C)			
	20W-xx	4500 (-10°C)		9000 (-15°C)			
Viscosity index (ASTM D2270), min.	xW-xx	-					
	30	75					
	40, 50	80					
Pour point (ASTM D97), °C, max.	0W-xx	-40		-40			
	5W-xx	-35		-35			
	10W-xx	-30		-30			
	15W-xx	-23		-25			
	20W-xx	-18		-20			
	30	-15		-15			
	40	-10		-10			
	50, 60	-5		-5			
Pumping temperature (ASTM D3829), °C, max.	0W-xx	-35	-35	-	-	-	-
	5W-xx	-30	-30	-	-	-	-
	10W-xx	-25	-25	-	-	-	-
	15W-xx	-20	-20	-	-	-	-
	20W-xx	-15	-15	-	-	-	-
Low temperature pumping viscosity (ASTM D4684), mPa.s, max.(no yield stress)	0W-xx	-		60000 (-40°C)			
	5W-xx	-		60000 (-35°C)			
	10W-xx	-		60000 (-30°C)			
	15W-xx	-		60000 (-25°C)			
	20W-xx	-		60000 (-20°C)			

GB 11122 - 2006 ^(#) - Heavy duty diesel engine oil

- 2 -



PERFORMANCE CATEGORY		CC	CD	CF	CF-4	CH-4	CI-4 ⁽²⁾
	Viscosity grades ⁽¹⁾	0W-20, 0W-30, 0W-40, 5W-20, 5W-30, 5W-40, 5W-50, 10W-30, 10W-40, 10W-50, 15W-30, 15W-40, 15W-50, 20W-40, 20W-50, 20W-60, 30, 40, 50, 60					
High temperature high shear viscosity, (ASTM D4741), mPa.s, min.	xW-20	-	2.6	2.6	2.6	2.6	3.5
	0W-30, 5W-30, 5W-40, 10W-30, 10W-40, 15W30	-	2.9	2.9	2.9	2.9	3.5
	5W-50, 10W-50, 15W-40, 15W-50, 20W-40, 20W-50, 20W-60	-	3.7	3.7	3.7	3.7	3.7
Water (ASTM D95), %, max.		Trace (0.03)					
Mechanical impurities (ASTM D2273), wt%, max.		0.01					
Flash point (COC), (ASTM D92), °C, min.	0W-xx, 5W-xx	200					
	10W-xx	205					
	15W-xx, 20W-xx	215					
	30, 40, 50, 60	220 (30), 225 (40), 230 (50), 240 (60)					
TBN (ASTM D2896), Sulphated ash (ASTM D874), Sulfur (ASTM D4951), Phosphorus (ASTM D5185), Nitrogen (ASTM D5762) ⁽⁴⁾		Report					
Engine test and laboratory tests corresponding API requirements (including their footnotes) ⁽⁵⁾		Yes					

Notes:

(#) Note that all P&C and bench tests are treated as critical specifications by China authorities who sample finished oils from the market for quality check (although ASTM D4485 is included in "Reference Documents"). Delivery inspections are required. Batch inspections: KV, VI, CCS, PP, impurities, water, FP, foaming, ash, TBN, Nitrogen and Phosphorus. Periodic inspections (every 6 months): volatility, borderline pumping temperature; MRV; HTHS and sulfur. Periodic inspections (once a year): corrosion, high temp. corrosion, KV after shearing, L-38 or Seq. VIII.

For the latest API oil categories or other oil categories not listed in GB 11122: Lubricant manufacturers' 'Enterprise Standard' is allowed with following conditions: 'Enterprise Standard' is more stringent than GB 11122; Get approval from and keep record in local authorities.

(1) Early version of SAE J300 fresh oil properties are listed within respective category: SAE J300-1987 (corresponding to GB/T 14906-94) for CC and CD, SAE J300-1999 for other categories.

(2) There is no CI-4+ in GB.

(3) Corresponding ASTM test methods are listed instead of original Chinese methods (i.e.: GB/T or SH/T) if applicable (e.g.: GB/T 265 is corresponding to ASTM D445; SH/T 260 is modified in relation to ISO 3733:1999, which is corresponding to ASTM D95).

(4) At the time of ex-factory of each batch of products, the producer shall report the actual measured value of this item to the users and dealers, if any disputes, the result of engine test shall prevail.

(5) The original specification tests and limits are listed but replacement tests and limits for older categories can be used. Additional foaming (ASTM D892) requirements: For CF and CF-4: 20/0, 50/0, 20/0; For CD and CC: 25/0, 150/0, 25/0.

GLOBAL DHD-1 specification

- 1 -



Laboratory tests	Limits
Foaming tendency w/o option A (ASTM D892), ml, max.	
Sequence I	10 / 0 ⁽¹⁾
Sequence II	50 / 0 ⁽¹⁾
Sequence III	10 / 0 ⁽¹⁾
High temperature foaming (ASTM D6082), ml, max.	100 / 0 ⁽¹⁾
Sulfated ash (ASTM D874), % m/m, max.	2.0
Base number (ASTM D4739), mg KOH/g, min.	10
HTCBT at 135°C (ASTM D6594), ppm increase, max.	
Copper	20
Lead	120
Tin	50
Copper strip rating (acc. to ASTM D130), max.	3.5
Kinematic viscosity at 100°C (ASTM D445), mm ² /s.	SAE J300
Low temperature cranking viscosity (ASTM D5293), mPa.s at -xx°C	SAE J300
Pumpability (ASTM D4684), 60.000 mPa.s max. at -xx°C	SAE J300
NOACK volatility , ASTM D5800 or CEC L-40-93, % loss, max.	15
Shear stability , ASTM D3945 or CEC L-14-A-93	
Kin. Visc. at 100°C after 30 cycle Bosch shearing, mm ² /s, min.	Stay in grade
Oxidation induction time , PDSC, CEC-L-085-99, Min, min.	35
Elastomer compatibility , CEC-L-039-96 ⁽²⁾	Pass

Notes:

(1) After 1 min. settling.

(2) Please refer to chapter "Elastomer Compatibility" for limits.

GLOBAL DHD-1 specification - 2 -



Engine tests	Limits
Run number	1 / 2 / 3
Aeration, EOAT (ASTM RR D02-1379) Oil Aeration at 20 h., %, max.	8.0
OM 441 LA (CEC L-52-T-97) Bore polishing, average, %, max. Piston cleanliness, average, merit, min. Boost pressure loss, 400 h, %, max. Specific oil consumption, kg/test, max.	2.0 25.0 4 40
Mack T-9 (ASTM D6483) Average liner wear at 1.75% soot, µm, max. Top ring weight loss, mg, max. Used oil lead increase, ppm, max. TAN increase at EOT, max.	25.4 / 26.6 / 27.1 120 / 136 / 144 15 ⁽³⁾ 2.0
Cummins M11 (300 h extended test) (ASTM RR:D02-1440) Rocker pad total weight loss at 4.5% soot, mg, max. Engine sludge at 200 h, CRC merit, min. Oil filter ΔP at 200 h, kPa, max.	6.5 / 7.5 / 8.0 8.7 / 8.6 / 8.5 79 / 93 / 100
Caterpillar 1R (ASTM D6923) ⁽⁴⁾ Weighted total demerit, max. Top groove carbon fill, %, max. Top land carbon, %, max. Average initial oil consumption, 0-252 h, g/h, max. Average final oil consumption, 432-504 h, g/h, max. Piston ring sticking and liner scuffing	397 / 416 / 440 40 / 42 / 44 37 / 42 / 46 13.1 1.5X Initial None
Sequence IIIF (ASTM D6984) ⁽⁵⁾ Viscosity increase at 40°C at 60 h (unadjusted), %, max.	200
Mack T-8E (300 h extended test) (ASTM D5967) Relative viscosity at 4.8% soot TGA, max.	2.1 / 2.2 / 2.3
Mitsubishi Fuso 4D34T4 Valve train wear test (JASO M 354:1999) Avg.cam diameter loss, µm, max. ⁽⁶⁾	95
Roller Follower Wear Test (ASTM D5966) Pin wear, µm, max.	7.6 / 8.4 / 9.1

Notes:

(3) Lead max. 25 ppm, if fresh oil has TBN (ASTM D4739) greater than 10.

(4) The Caterpillar 1R requirements may be satisfied with a passing API CH-4 test result in the Caterpillar 1P.

(5) The Sequence IIIF oxidation requirements may be satisfied with a passing API CH-4 test result in the Sequence IIIE.

(6) Normalized at 4.5 mass % carbon residue increase.

JASO DH-1, DH-2, DH-2F, DL-0, DL-1 specification - Laboratory test

- 1 -



Specifications	DH-1-05	DH-1-14 DH-1-15 DH-1-17	DH-2-08	DH-2-14 DH-2-15 DH-2-17 DH-2F-17	DL-0-17	DL-1-08 xW-20, xW-30	DL-1-14 DL-1-15 DL-1-17 xW-20, xW-30
SAE Viscosity grades	-	-	-	-	-	-	-
Laboratory tests	Limits						
Kinematic viscosity at 100°C (ASTM D445), mm ² /s.	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
HTHS viscosity (ASTM D4683), mPa.s, min.	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
Low temperature cranking viscosity (ASTM D5293), mPa.s at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
Pumpability (ASTM D4684), 60.000 mPa.s max. at -xx°C	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300	SAE J300
Hot surface deposit control at 280°C (JPI-55-55-99), merit, min.	7.0	7.0	7.0	7.0	7.0	7.0	7.0
Foaming tendency w/o option A (ASTM D892), ml, max.							
Sequence I	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
Sequence II	50 / 0	50 / 0	50 / 0	50 / 0	50 / 0	50 / 0	50 / 0
Sequence III	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
High temperature foaming (ASTM D6082), ml, max.	-	-	-	-	100 / 0	100 / 0	100 / 0
NOACK volatility (ASTM D5800), % loss at 250°C, max.	18.0	18.0	18.0	18.0	15	15	15
HTCBT at 135°C (ASTM D6594), ppm increase, max.							
Copper	20	20	20	20	20	20	20
Lead	120	120	100	100	120	120	120
Tin	50	50	50	50	50	50	50
Copper strip rating (acc. to ASTM D130), max.	3	3	3	3	3	3	3
Shear stability (ASTM D6278) Kin. Visc. at 100°C after 30 cycle Bosch shearing, mm ² /s, min.	Stay in grade ⁽¹⁾	Stay in grade ⁽¹⁾	Stay in grade ⁽¹⁾	Stay in grade ⁽¹⁾	Stay in grade ⁽¹⁾	xW-30: 8.6 xW-20: Stay in grade ⁽¹⁾	xW-30: 8.6 xW-20: Stay in grade ⁽¹⁾
Sulfated ash (ASTM D874), % m/m, max.	Report	Report	1.0 ± 0.1	1.0 ± 0.1	1.6	0.6	0.6
Base number (ASTM D4739), mg KOH/g, min.	10.0 ⁽²⁾	10.0 ⁽²⁾	-	-	-	Report ⁽²⁾	Report ⁽²⁾
Base number (JIS K2501:2003 8.), mg KOH/g, min.	10.0 ⁽²⁾	10.0 ⁽²⁾	5.5	5.5	-	Report ⁽²⁾	Report ⁽²⁾
Base number (ASTM D2896 or JIS K2501:2003 9.), mg KOH/g, min.	-	-	-	-	8.0	-	-

JASO DH-1, DH-2, DH-2F, DL-0, DL-1 specification - Laboratory test - 2 -



Specifications	DH-1-05	DH-1-14 DH-1-15 DH-1-17	DH-2-08	DH-2-14 DH-2-15 DH-2-17 DH-2F-17	DL-0-17	DL-1-08	DL-1-14 DL-1-15 DL-1-17
SAE Viscosity grades	-	-	-	-	-	xW-20, xW-30	xW-20, xW-30
Laboratory tests	Limits						
Phosphorus (ASTM D5185), % m/m, max.	Report	Report	0.12	0.12	Report	0.1	0.1
Sulfur (ASTM D5185), % m/m, max.	Report	Report	0.5	0.5	Report	0.5	0.5
Chlorine (ASTM D6443), ppm, max.	Report	Report	150	150	Report	150	150
Elastomer compatibility (CEC L-39-T-96) ⁽¹⁾ or Elastomer compatibility (ASTM D7216) ⁽³⁾	Pass	Pass	Pass	Pass	Pass	Pass	Pass
	-	Pass	-	Pass	Pass	-	Pass

Notes:

(1) Only for multi grade oils.

(2) Only one of Base number has to be run.

(3) Only one of Elastomer compatibility has to be run. Please refer to chapter "Elastomer Compatibility" for limits.

JASO DH-1, DH-2, DH-2F, DL-0, DL-1 specification - Engine test

- 1 -



Specifications	DH-1-05 DH-2-08	DL-1-08	DH-1-14 DH-2-14	DL-1-14	DH-1-15 DH-2-15	DL-1-15	DH-1-17 DH-2-17 DL-0-17	DH-2F	DL-1-17
First date when classification indication is allowed	-		October 1, 2014		October 1, 2015		October 1, 2017		
Last date when a new reporting is accepted	March 31, 2016		March 31, 2017		March 31, 2018		-		
On-file termination date	September 30, 2019		September 30, 2020		September 30, 2021		-		
Engine tests	Limits								
Nissan Diesel TD25 Piston detergency test (JASO M 336:1998) ⁽¹⁾									
Top groove fill, %, max.	60.0	60.0	-	-	-	-	-	-	-
Deposits on ring lands, merit	Report	Report	-	-	-	-	-	-	-
Piston ring sticking	All free	All free	-	-	-	-	-	-	-
Hino N04C Piston detergency test (JASO M 336:2014)									
Weighted Total Demerit, max.	-	-	740	740	740	740	740	740	740
Top groove fill, %, max.	-	-	Report	Report	Report	Report	Report	Report	Report
Deposits on ring lands, merit	-	-	Report	Report	Report	Report	Report	Report	Report
Piston ring sticking	-	-	All free	All free	All free	All free	All free	All free	All free
Mitsubishi Fuso 4D34T4 Valve train wear test (JASO M 354:2006)									
Avg.cam diameter loss, µm, max. ⁽²⁾	95.0	95.0	95.0	95.0	-	-	-	-	-
Max.cam diameter loss, µm, max. ⁽²⁾	210	210	210	210	-	-	-	-	-
Cam surface wear	No pitting	No pitting	No pitting	No pitting	-	-	-	-	-
Hino N04C Valve train wear test (JASO M 354:2015)									
Tappet Wear, µm, max.	-	-	-	-	11.3	11.3	11.3	11.3	11.3
Mack T-8A (ASTM D5967) ⁽³⁾									
Viscosity increase (100 to 150 h.) at 100°C, mm ² /s/h., max.	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
or Mack T-8E (ASTM D5967) ⁽³⁾									
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Relative viscosity at 100°C at 4.8% soot, max.	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3

JASO DH-1, DH-2, DH-2F, DL-0, DL-1 specification - Engine test

- 2 -



Specifications	DH-1-05 DH-2-08	DL-1-08	DH-1-14 DH-2-14	DL-1-14	DH-1-15 DH-2-15	DL-1-15	DH-1-17 DH-2-17 DL-0-17	DH-2F	DL-1-17
First date when classification indication is allowed	-		October 1, 2014		October 1, 2015		October 1, 2017		
Last date when a new reporting is accepted	March 31, 2016		March 31, 2017		March 31, 2018		-		
On-file termination date	September 30, 2019		September 30, 2020		September 30, 2021		-		
Engine tests	Limits								
or Mack T-11 (ASTM D7156) ⁽³⁾									
Run number	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3	1 - 2 - 3
Minimum % TGA Soot at 4.0 cSt increase at 100°C	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3	3.5 - 3.4 - 3.3
Minimum % TGA Soot at 12.0 cSt increase at 100°C	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9	6.0 - 5.9 - 5.9
Minimum % TGA Soot at 15.0 cSt increase at 100°C	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5	6.7 - 6.6 - 6.5
SEQUENCE IIIE (ASTM D5533), or SEQUENCE IIIF (ASTM D6984), or SEQUENCE IIIG (ASTM D7320) ⁽⁴⁾	IIIE, or IIIF, or IIIG	IIIF, or IIIG	IIIE, or IIIF, or IIIG	IIIF, or IIIG	IIIE, or IIIF, or IIIG	IIIF, or IIIG	IIIE, or IIIF, or IIIG	IIIE, or IIIF, or IIIG	IIIF, or IIIG
Viscosity increase at 40°C, increase after 64 h, %, max. (IIIE)	200	-	200	-	200	-	200	200	-
Viscosity increase at 40°C, increase after 60 h, %, max. (IIIF)	295	275 (after 80 h.)	295	275 (after 80 h.)	295	275 (after 80 h.)	295	295	275 (after 80 h.)
Viscosity increase at 40°C, increase after 100 h, %, max. (IIIG)	150	150	150	150	150	150	150	150	150
Hino N04C Fuel economy test (JASO M 362:2017)									
Average fuel economy improvement (fresh oils), %, min.	-	-	-	-	-	-	-	3.7	-
Sum of average fuel economy improvement (fresh + aged oils), %, min. ⁽⁵⁾	-	-	-	-	-	-	-	6.8	-
M111 Fuel economy test (CEC L-54-T-96) ⁽⁶⁾									
Fuel economy improvement, %, min.	-	2.5	-	2.5	-	2.5	-	-	2.5

Notes:

(1) TD25 engine is no longer supplied since March 2009.

Alternative detergency tests for DH-1-05 and DH-2-08 are: Caterpillar 1K (ASTM D6750), Caterpillar 1N (ASTM D6750), Caterpillar 1P (ASTM D6681), Caterpillar 1R (ASTM D6923), Caterpillar C13 (ASTM D7549) according to the limits of API CH-4, CI-4 and CJ-4.

Alternative detergency test for DL-1-08 is: VWTDI2 (CEC-L-78-T-99) according to the limits of ACEA C2-08.

(2) Normalized at 4.5 mass % carbon residue increase.

(3) Only one of the Mack tests has to be run.

(4) Only one of the Sequence III tests has to be run.

(5) Aged oil after 200 h operation, which was obtained according to the JASO M 336 or JASO M 354, shall be used.

(6) Not required for 10W-30.

MIL-PRF-2104M specification ⁽²⁾ **- 1 -**



Laboratory tests	Limits				
SAE Viscosity grades	10W	30	40	15W-40	SCPL ⁽⁴⁾
API performance level	CH-4	CH-4	CH-4	CI-4	CI-4
Foaming tendency w/o option A (ASTM D892), ml, max.					
Sequence I	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾
Sequence II	20 / 0 ⁽¹⁾	20 / 0 ⁽¹⁾	20 / 0 ⁽¹⁾	20 / 0 ⁽¹⁾	20 / 0 ⁽¹⁾
Sequence III	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾	10 / 0 ⁽¹⁾
Sulfated ash (ASTM D874), % m/m, max.	1,5	1,5	1,5	1,5	1,5
HTCBT at 135°C (ASTM D6594), ppm increase, max.					
Copper	20	20	20	20	20
Lead	120	120	120	120	120
Tin	Report	Report	Report	Report	Report
Copper strip rating (acc. to ASTM D130), max.	3	3	3	3	3
HTHS viscosity (ASTM D4683, D4741, or D5481), mPa.s, min.	-	3,5	3,7	3,7	2,7
Kinematic viscosity at 100°C (ASTM D445), mm ² /s.	5.6 to <7.4	9.3 to <12.5	12.5 to <16.3	12.5 to <16.3	8.0 to <9.3
Low temperature cranking viscosity (ASTM D5293), mPa.s at -xx°C	7000 at -25°C	-	-	7000 at -20°C	4300 at -35°C
Pumpability (ASTM D4684), mPa.s max. at -xx°C	60000 at -30°C	-	-	60000 at -25°C	13000 at -40°C
NOACK volatility , ASTM D5800, % loss, max.	18	-	-	15	14
Shear Stability KV100 , CEC L-014-93 or ASTM D3945, Kin. Viscosity, mm ² /s	-	-	-	12.5	8
Flash Point , ASTM D92, °C, min.	205	220	225	215	210
Pour point , ASTM D97, D5949 or D5950, °C, max.	-30	-18	-15	-25	-55
Allison TES-295 Elastomer compatibility ⁽⁵⁾	Pass	Pass	Pass	Pass	Pass
Allison C-4 Graphite and paper friction	≥ qualified batch sample mean mid-point friction coefficient minus 0.012 ≤ max. acceptable slip time criteria				
Mid-point dynamic friction					
Slip time					

MIL-PRF-2104M specification ⁽²⁾

- 2 -



Laboratory tests	Limits				
SAE Viscosity grades	10W	30	40	15W-40	SCPL ⁽⁴⁾
API performance level	CH-4	CH-4	CH-4	CI-4	CI-4
Caterpillar TO-4/TO-4M (SEQ1220)	TO-4	TO-4	TO-4	TO-4M	TO-4M
Avg.dynamic coefficient, %			90.0-140.0		
Avg.static coefficient, %			91.0-127.0		
Disc wear, mm, max.			0.04		
Energy limit, m/s, min.			25		
Caterpillar TO-4/TO-4M (SEQFRRET)	TO-4	TO-4	TO-4	TO-4M	TO-4M
Avg.dynamic coefficient, %			85.0-130.0		
at 3000 cycles			90.0-125.0		
at 8000 cycles			90.0-125.0		
at 15000 cycles			95.0-125.0		
at 25000 cycles					
Homogeneity and miscibility (ASTM D6922)	Pass ⁽³⁾	Pass ⁽³⁾	Pass ⁽³⁾	Pass ⁽³⁾	Pass ⁽³⁾

Notes:

(1) After 1 min. settling.

(2) Specification covers engine oils suitable for lubrication of reciprocating compression-ignition internal combustion engines and for power transmission fluid applications.

(3) Shall remain homogenous and, when mixed with ASTM reference oils, shall remain miscible.

(4) Single Common Powertrain Lubricants (full synthetic, all season, i.e., artic-to-desert, heavy duty diesel engine oil to reduce fuel consumption and extend oil drain interval).

(5) Please refer to chapter "Elastomer Compatibility" for limits.

MIL-PRF-2104M specification ⁽²⁾

- 3 -



Engine tests		Limits	
SAE Viscosity grades		10W, 30, 40	15W-40, SCPL
API performance level		CH-4	CI-4
Aeration, EOAT (ASTM RR D02-1379)			
Oil Aeration at 20 h., %, max.		8.0	
Caterpillar 1K (ASTM D6750)	Run number	1 / 2 / 3	1 / 2 / 3
	Weighted total demerit, max.	332 / 347 / 353	332 / 347 / 353
	Top groove carbon fill, %, max.	24 / 27 / 29	24 / 27 / 29
	Top land heavy carbon, %, max.	4 / 5 / 5	4 / 5 / 5
	Oil consumption, g/MJ (0-250h), max.	0,139	0,139
	Piston ring sticking and liner scuffing	None	None
Caterpillar 1P, 1R (ASTM D6681, D6923)		1P	1R ⁽⁴⁾
Run number		1 / 2 / 3	1 / 2 / 3
	Weighted total demerit	350 / 378 / 390	382 / 396 / 402
	Top groove carbon fill, %	36 / 39 / 41	52 / 57 / 59
	Top land heavy carbon, %	40 / 46 / 49	31 / 35 / 36
	Average oil consumption, 0-360 h, g/h	12.4	-
	Initial oil cons. g/h, max., 0-252 h	-	13,1
	Final oil consumption, 312-360 h, g/h	14.6	-
	Final oil consumption, 432-504 h, g/h	-	Initial + 1.8
	Ring sticking	-	None
	Piston, ring and liner scuffing	None	None
Cummins ISM (ASTM D7468) ⁽⁵⁾	Run number	1 - 2 - 3	1 / 2 / 3
	Crosshead wear, mg, max.	7.5 - 7.8 - 7.9	7.5 - 7.8 - 7.9
	Oil filter ΔP at 150 h, kPa, max.	79 - 95 - 103	55 - 67 - 74
	Engine sludge at end-of-test, CRC merit, min.	8.1 - 8.0 - 8.0	8.1 - 8.0 - 8.0
Mack T-8E (300 h extended test) (ASTM D5967) (5)	Run number	1 - 2 - 3	1 - 2 - 3
	Relative viscosity at 4.8% soot TGA, max.	2.1 - 2.2 - 2.3	1.8 - 1.9 - 2.0
	Viscosity increase at 3.8% soot TGA, mm ² /s max.	11.5 - 12.5 - 13.0	-

MIL-PRF-2104M specification ⁽²⁾

- 4 -



Engine tests		Limits	
SAE Viscosity grades		10W, 30, 40	15W-40, SCPL
API performance level		CH-4	CI-4
Sequence IIIF, IIIG (ASTM D6984, D7320)		IIIF (60h) or IIIG	IIIF or IIIG
Run number		1 - 2 - 3	1 - 2 - 3
Viscosity (at 40°C), increase from 10 min sample, %, max. (IIIF)		295 (MTAC)	275 (MTAC)
Kinematic viscosity, % increase at 40°C, max. (IIIG)		150 (MTAC)	150 (MTAC)
Roller follower wear test (RFTW) (ASTM D5966)		Run number	
Average Pin Wear, (µm) max		1 - 2 - 3	1 - 2 - 3
		7.6 - 8.4 - 9.1	7.6 - 8.4 - 9.1
Mack T-12 (ASTM D7422) ⁽⁵⁾			
Run number		1 - 2 - 3	1 - 2 - 3
Merit rating, min.		-	1000 - 1000 - 1000
Liner wear, µm, max. (anchor)		30.0 - 30.8 - 31.1	-
Top ring weight loss, mg, max. (anchor)		120 - 132 - 137	-
Lead content at EOT, mg/kg, max. (anchor)		65 - 75 - 79	-
Used oil pumpability at 75 h, MRV at -20°C, mPa.s, max. ⁽⁷⁾		-	25000 (NYS) ⁽⁶⁾
Fuel Consumption Improvement (FCI) test			
FCI, %, min.		-	2.0 (relative to baseline oil)
High temperature durability test			
Viscosity increase, %, max.		-	70
TBN, mg KOH/g, min.		-	4,0
Copper, mg/kg, max.		-	60
Iron, mg/kg, max.		-	430
Lead, mg/kg, max.		-	150
TBN/ TAN, min.		-	0,50

- Notes:**
- (1) Per ASTM D5862, with the exception that ratings from any five of the six cylinders shall be averaged.
- (2) Specification covers engine oils suitable for lubrication of reciprocating compression-ignition internal combustion engines and for power transmission fluid applications.
- (3) If yieldstress is detected, modified ASTM D4684 can be used.
- (4) Oil grades 15W-40 and SCPL shall pass either Cat 1P or Cat 1R. Cat 1P limits are those required for API CH-4.
- (5) See ASTM D4485 for alternate test method(s) and performance criteria.
- (6) If Yield Stress is detected, use modified ASTM D4684 (external preheat); then limits become Viscosity: 25000 cP max and Yield Stress: <35 Pa.
- (7) Sample to test can also be from a Mack T-10A test or a Mack T-12A test to generate the sample for ASTM D4684 as used to measure this parameter. Mack T-10A is the name given to a Mack T-10 test run for 75 h. Mack T-12A is the name given to a Mack T-12 test run for 100 h.)

**OEM
requirements
for Gasoline
and Diesel
engine oils**



BMW Long Life specification overview

- 1 -



BMW Specifications	LL-01	LL-01 FE	LL-04	LL-12 FE	LL-14 FE+	LL-17 FE+
Application	Minimum level for Gasoline from MY2002 Minimum level for non-DPF Diesels from MY2003 OK for older engines Not allowed for M engines in general, only for new S55- and S63-M-engines	All Gasoline engines from MY 2005 OK for older Gasoline engines with Valvetronic Not allowed for Diesel Engines Not allowed for M engines in general, only for new S55- and S63-M-engines	Mandatory for DPF Diesels OK for non-DPF Diesels OK for gasoline from MY 2002 in Europe only Not allowed for M engines in general, only for new S55- and S63-M-engines	Standard BMW Diesels from MY 2013 onwards. (Not backward compatible) NOT allowed for high power Diesels. Check manual for details. (Rule of thumb: Multiple turbos) OK for gasoline from MY 2002 in Europe only Not allowed for M engines in general, only for new S55- and S63-M-engines	ONLY for EU and USA Allowed for Gasoline from MY 2013 with N20 and "Baukasten" engines NOT allowed for other engines Not allowed for M engines in general, only for new S55- and S63-M-engines	Backward compatible with LL-14 FE+ ONLY for EU, NAFTA, China Mandatory for engines with Gasoline Particulate Filters (GPF's) OK for Gasoline from MY 2013 with N20 and "Baukasten" engines NOT allowed for other engines Not allowed for M engines in general, only for new S55- and S63-M-engines
ACEA basis	A3/B4 ⁻¹⁶	A5/B5 ⁻¹⁶	C3 ⁻¹⁶ excl. P limit	C2 ⁻¹⁶	C5 ⁻¹⁶ excl. S. Ash limit	C5 ⁻¹⁶
SAE Viscosity grade	0/5W-30/40	xW-30	0/5W-30/40	xW-30	xW-20	xW-20
HTHS viscosity (CEC L-036-90), mPa.s, min.	3.5	3.0	3.5	2.9	2.6	2.6
Kin. viscosity at 100 °C , mm ² /s	SAE J300	≥ 10.0	SAE J300	≥ 8.8	≥ 7.8 & < 9.3	≥ 7.8 & < 9.3
Noack (ASTM D5800), %	ACEA	ACEA	ACEA	ACEA	ACEA	ACEA
TBN (ASTM D2896), mg KOH/g, min.	10.0	10.0	6.0	6.0	9.5	6.0
Sulfated ash (ASTM D874), % m/m	≥ 1.0 & ≤ 1.6	≤ 1.6	≤ 0.8	≤ 0.8	≤ 1.3	≤ 0.8
Pour Point (ASTM D97), °C, max.	-42 for 0W-xx, TBD for 5W-xx	-42 for 0W-xx, TBD for 5W-xx	-42 for 0W-xx, TBD for 5W-xx	-42 for 0W-xx, TBD for 5W-xx	-42	-42

BMW Long Life specification overview

- 2 -



BMW Specifications	LL-01	LL-01 FE	LL-04	LL-12 FE	LL-14 FE+	LL-17 FE+
Required BMW laboratory tests:						
FZG Wear test A10/16.6R/130 (CEC L-84-02), failure load stage, min.	8	8	8	8	8	8
Required BMW engine tests:						
N20 Performance						
Piston cleanliness (average 4 pistons), merit, min.	44.0	44.0	44.0	44.0	44.0	44.0
Engine sludge avg., merit, min.	9.1	9.1	9.1	9.1	9.1	9.1
Average weighted turbo deposits, merit, max.	2.2	2.2	2.2	2.2	2.2	2.2
Viscosity increase at 40°C, %, max.	20	20	20	20	20	20
Viscosity increase at 100°C, %, max.	20	20	20	20	20	20
Fe-content, ppm, max.	130	130	130	130	130	130
N20 Aeration						
Fresh oil, part 1 (Avg. run 3, 4, 5 at 6500 rpm), %, max.	4.0	4.0	4.0	4.0	4.0	4.0
Fresh oil, part 2 at 3125 ml, %, max.	15.0	15.0	15.0	15.0	15.0	15.0
Used oil (70h), part 1 (Avg. run 3, 4, 5 at 6500 rpm), %, max.	8.0	8.0	8.0	8.0	8.0	8.0
Used oil, part 2 at 3125 ml, %, max.	15.0	15.0	15.0	15.0	15.0	15.0
N42 Valvetronic RNT , ratio: candidate/reference, max	44.0	44.0	44.0	44.0	44.0	44.0
B48 Gasoline fuel economy NEDC/WLTP/CAFE	-	Pass ⁽¹⁾	-	Pass ⁽¹⁾	Pass ⁽²⁾	Pass ⁽²⁾
B47 Diesel fuel economy WLTP	-	-	-	Pass ⁽³⁾	-	Pass ⁽⁴⁾
B47 Aeration	-	-	Comparable or better than reference oil	Comparable or better than reference oil	-	Comparable or better than reference oil
B47 Diesel turbo charger deposits test, merit, max	-	-	1.6	1.6	-	1.6

Notes:

(1) Limit $\geq -0.5\%$ vs OW-20 ref oil on NEDC and WLTP, $\geq -0.4\%$ for CAFE

(2) Limit $\geq 0.0\%$ vs OW-20 ref oil for NEDC, WLTP and CAFE

(3) Limit $\geq -0.0\%$ vs OW-30 ref oil for WLTP

(4) Limit $\geq -0.5\%$ vs OW-30 ref oil on WLTP

CATERPILLAR Engine Crankcase Fluid (ECF) recommendations

- 1 -



	Model year 2007 ⁽¹⁾	Pre-model year 2007 ⁽¹⁾
Viscosity grades (SAE J300)	10W-30, 15W-40	
Preferred	Cat DEO-ULS Cat DEO and Cat DEO-ULS require in addition to the tests required for Cat ECF classifications, pass results in a number of Cat Proprietary multi-cylinder tests, field tests and a variety of quality assurance tests.	Cat DEO-ULS Cat DEO
Commercial lubricants	Cat ECF-3 / API CJ-4 ⁽²⁾	Cat ECF-3 / API CJ-4 Cat ECF-2 Cat ECF-1-a

Notes:

- (1) The oils are listed in order of preference
(2) Cat ECF-2 oils of $\leq$ 1 percent ash content are also allowed

Caterpillar specification	Application	Caterpillar ECF specifications requirements
Cat ECF-3	Caterpillar 2007 model year on-highway diesel engines. Also highly recommended for other Caterpillar engines in on-highway applications. Cat 3500 series and smaller machine and commercial diesel engines.	API CJ-4
Cat ECF-2	All 2006 model year and older Caterpillar on-highway diesel engines and Cat 3500 Series and smaller commercial and machine diesel engines. <u>Not</u> applicable to Cat engines equipped with Diesel Particulate Filters (DPF)	API CI-4 / CI-4 PLUS Cat C13 500h. engine test as defined in the API CJ-4 oil category requirements and 2- Oils of sulfated ash >1.50 wt% are not allowed. Sulfated ash $\leq$ 1.50wt% API oil categories older than API CI-4 may not claim to meet the Cat ECF-2 specification.
Cat ECF-1-a	All 2006 model year and older Cat on-highway diesel engines and Cat 3500 series and smaller commercial and machine diesel engines. Not applicable to Cat model year 2007 and newer on-highway engine models. Not applicable to Cat engines equipped with Diesel Particulate Filters (DPF).	API CH-4 Cat 1P SCOTE ⁽¹⁾ test (ASTM D6681). Sulfated ash $\leq$ 1.30wt% If 1.30 < sulfated ash $\leq$ 1.50wt%, two passing Cat 1P test (ASTM D4485) at the single pass limits API oil categories older than API CI-4 may not claim to meet Cat ECF-1-a specification.

Notes:

- (1) SCOTE Single Cylinder Oil Test Engine.

CATERPILLAR Engine Crankcase Fluid (ECF) recommendations
- 2 -



Fuel sulfur level (ppm)	Cat engine oils	TBN of commercial engine oils (mg KOH/g)
≤ 500	Cat DEO-ULS, Cat DEO	≥ 7
> 500 - 1000	Cat DEO-ULS, Cat DEO	≥ 7
> 1000	Cat DEO	≥ 10

CHRYSLER GROUP LLC requirements – MS-6395 specification



Oronite

Specification	MS-6395
Bench test requirements and limits	According to ILSAC GF-5
Engine test requirements and limits	According to ILSAC GF-5
Chrysler field test	
Chrysler vehicles for 100000 miles in taxicabs in Las Vegas over two summers and one winter	Pass

CUMMINS Engineering Standards (CES)

- 1 -



CES Number	20076	20077	20078	20081	20086 / 20087
API, ACEA, JASO performance level	API CH-4/SJ, ACEA E5, JASO DH-1	API CH-4/SJ, ACEA E5, JASO DH-1	API CI-4, ACEA E7	API CJ-4, ACEA E9, JASO DH-2	API CK-4 / FA-4
Viscosity grades (SAE J300)	xW-30, xW-40	10W-30, 10W-40, 15W-40	xW-30, xW-40	xW-30, xW-40	xW-30, xW-40 / xW-30
Laboratory tests ⁽¹⁾					
Viscosity at 40°C (ASTM D445), mm ² /s	Report	Report	Report	Report	Report
at 100°C	Per SAE J300	Per SAE J300	Report	Report	Report
Shear stability (ASTM D3945, D6278, D7109, CEC L-14-A-96)				D7109 (90 cycles)	D7109 (90 cycles)
Kinematic viscosity at 100°C (ASTM D445), mm ² /s, min.	xW-30: 9.5, xW-40: 12.5	Stay in grade	xW-30: 9.3, xW-40: 12.5	xW-30: 9.3, xW-40: 12.5	xW-30: 9.3; 0W-40: 12.5; xW-40: 12.8
Low temperature cranking and pumping viscosity					
CCS (ASTM D5293), mPa.s, max.	Per SAE J300	Per SAE J300	Report	Report	Report
MRV (ASTM D4684), mPa.s, max.	Per SAE J300	Per SAE J300	Report	Report	Report
HTHS viscosity (ASTM D4683, CEC L-36-90), mPa.s, min.	3.7	Per SAE J300	3.5	3.5	3.5 / 2.9 - 3.2
Gelation index (ASTM D5133), max.	12	-	12	12	12
Evaporative loss (Noack) (ASTM D5800), %, max.	xW-30: 20, xW-40: 18	-	15	xW-30: 15, xW-40: 13	13
(CEC L-40-A-93), %, max.	-	12	-	-	-
TBN (ASTM D2896), mg KOH/g, min.	Report	Report	-	-	-
(ASTM D4739), mg KOH/g, min.	-	-	10.0	Report	Report
TAN (ASTM D664), mg KOH/g	Report	Report	Report	Report	Report
Run number				1 / 2 / 3	1 / 2 / 3
Sulfated ash (ASTM D874), % m/m, max.	1.85	1.85	1.85	1.00 / 1.02 / 1.03	1.0 / 1.0 / 1.0
Ba, Bo, Ca, Cu, Mg, Mo, Si, Na, Zn (ICP)	Report	Report	Report	Report	Report
Phosphorus (ASTM D4951), % m/m, max.	Report	Report	Report	0.12	0.12
Sulfur (ASTM 4951), % m/m, max.	Report	Report	Report	0.4	0.4
Nitrogen (ASTM D4629 / D5762), % m/m	Report	Report	Report	Report	Report
Infrared spectrum (CES 60005)	Report	Report	Report	Report	Report
Oxidation induction time (PDSC) (CEC-L-85-T-99), min.	-	35	-	-	-

CUMMINS Engineering Standards (CES)

-2 -



CES Number	20076	20077	20078	20081	20086 / 20087
Elastomer compatibility (CEC L-39-96, ASTM D7216) ⁽²⁾					
Nitrile (NBR)	Pass	Pass	Pass	Pass	Pass
Silicone (VMQ)	Pass	Pass	Pass	Pass	Pass
Polyacrylate (ACM)	Pass	Pass	Pass	Pass	Pass
Fluorelastomer (FKM)	Pass	Pass	Pass	Pass	Pass
Vamac G (AEM)	-	-	-	Pass	Pass
Corrosion tendency (HTCBT) (ASTM D5968 at 275°F, D6594 at 135°C)	D5968	D5968	D6594	D6594	D6594
Copper increase, ppm, max.	20	20	20	20	20
Lead increase, ppm, max.	120	100	120	120	120
Tin increase, ppm, max.	50	100	50	50	50
Copper strip rating (ASTM D130), max.	3	-	3	3	3
Foaming tendency					
Sequence I (24°C), II (94°C), III (24°C) (ASTM D892) (No option A), ml, max.	10 / 0, 50 / 0, 10 / 0	10 / 0, 50 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0
Sequence IV (150°C) (ASTM D6082), ml, max.	-	200 / 50	-	-	-
Low temperature pumping viscosity (75 / 180 h T10(A) / T11(A)) (ASTM D4684)					
MRV viscosity at -20°C, mPa.s, max.	-	-	25000	25000	18000
MRV yield stress	-	-	No yield stress	No yield stress	No yield stress

CUMMINS Engineering Standards (CES)

- 3 -



CES Number	20076	20077	20078	20081	20086 / 20087
Engine tests ⁽¹⁾					
Caterpillar 1P (ASTM D6681)					
Weighted total demerit	Report	-	-	-	-
Top groove carbon fill, %	Report	-	-	-	-
Top land heavy carbon, %	Report	-	-	-	-
Average oil consumption, 0-360 h, g/h	Report	-	-	-	-
Final oil consumption, 336-360 h, g/h	Report	-	-	-	-
Piston ring and liner scuffing	Report	-	-	-	-
Caterpillar 1R (ASTM D6923)					
Weighted total demerit, max.	-	-	382	-	-
Top groove carbon fill, %, max.	-	-	52	-	-
Top land carbon, %, max.	-	-	31	-	-
Average oil consumption - initial 0-252 h, g/h, max.	-	-	13.1	-	-
Average oil consumption - final 432-504 h, g/h, max.	-	-	Initial + 1.8	-	-
Piston ring sticking and liner scuffing	-	-	None	-	-
Caterpillar 1K (ASTM D6750) ⁽³⁾ Run number	1 / 2 / 3				
Weighted total demerit, max.	332 / 347 / 353	-	332	-	-
Top groove carbon fill, %, max.	24 / 27 / 29	-	24	-	-
Top land heavy carbon, %, max.	4 / 5 / 5	-	4	-	-
Oil consumption, g/bhp-h / g/kW-h, max.	0.5 g/bhp-h	-	0.5 g/kW-h	-	-
Piston ring sticking and liner scuffing	None	-	None	-	-
Caterpillar 1N (ASTM D6750) ⁽³⁾ Run number					1 / 2 / 3
Weighted total demerit, max.	-	-	286.2	286.2	286.2 / 311.7 / 323
Top groove carbon fill, %, max.	-	-	20	20	20 / 23 / 25
Top land heavy carbon, %, max.	-	-	3	3	3 / 4 / 5
Oil consumption (0 - 252 h), g/kWh, max.	-	-	0.5	0.5	0.5
Piston ring sticking and liner scuffing	-	-	None	None	None

CUMMINS Engineering Standards (CES)

- 4 -



CES Number	20076	20077	20078	20081	20086 / 20087
Caterpillar C13 (ASTM D7549)					
Merit rating, min.	-	-	-	Report	1000
Oil consumption delta , g/h, max.	-	-	-	Report	31
TLC, %, max.	-	-	-	Report	35
TGC, %, max.	-	-	-	Report	53
2 nd Ring top carbon, %, max.	-	-	-	Report	33
Hot stuck piston ring	-	-	-	Report	None
Aeration volume Run number					1 / 2 / 3
Aeration volume (ASTM D6894), vol%, max.	8.0	-	8.0	8.0	
Average aeration (COAT) (ASTM D8047), vol%, max	-	-	-	-	11.8 / 11.8 / 11.8
Cummins ISB (ASTM D7484) Run number				1 / 2 / 3	1 / 2 / 3
Slider tappet weight loss, avg., mg, max.	-	-	-	100 / 108 / 112	100 / 108 / 112
Cam shaft wear, avg., µm, max.	-	-	-	50 / 53 / 55	50 / 53 / 55
Crosshead weight loss, avg., mg	-	-	-	Report	Report
Cummins ISM (ASTM D7468)					
Merit rating, min.	-	-	-	1000	1000
Crosshead total weight loss, mg at 3.9% avg. soot, max.	-	-	-	71	71
Diff. pressure across oil filter after 150 h, kPa, max.	-	-	-	19	19
Adjusting screw weight loss, mg, max.	-	-	-	45	45
Avg. engine sludge CRC merits at EOT, min.	-	-	-	8.7	8.7
Cummins M11 (300 h extended test) (ASTM D6838) Run number	1 / 2 / 3	1 / 2 / 3			
Rocker pad total weight loss at 4.5% soot, mg, max.	-	-	-	-	-
Crosshead wear weight loss at 6.5% soot, avg., mg, max.	12.0	12.0	-	-	-
Engine sludge at 200 h, CRC merit, min.	8.7 / 8.6 / 8.5	8.7 / 8.6 / 8.5	-	-	-
Oil filter ΔP at 200 h, kPa, max.	79 / 93 / 100	79 / 93 / 100	-	-	-
Cummins M11 EGR (ASTM D6975)					
Crosshead total weight loss at 4.6% avg. soot, mg, max.	-	-	20.0	-	-
Top ring weight loss, mg, max.	-	-	175.0	-	-
Engine sludge at end-of-test, CRC merit, min.	-	-	7.80	-	-
Oil filter ΔP at 250 h, kPa, max.	-	-	275.0	-	-

CUMMINS Engineering Standards (CES)

- 5 -



CES Number		20076	20077	20078	20081	20086 / 20087
Mack T-8 (250 h) (ASTM D5967)	Run number					
Viscosity increase at 3.8% soot, mm ² /s, max.		-	-	-	-	-
Oil filter ΔP, kPa, max.		-	-	-	-	-
Oil consumption, g/kWh, max.		-	-	-	-	-
Mack T-8E (300 h extended test) (ASTM D5967)	Run number	1 / 2 / 3	1 / 2 / 3			
Relative viscosity at 4.8% soot TGA, max.		1.8 / 1.9 / 2.0	1.8 / 1.9 / 2.0	1.8	-	-
Viscosity increase at 100°C at 3.8% soot, mm ² /s, max.		11.5 / 12.5 / 13.0	11.5 / 12.5 / 13.0	Report	-	-
Oil filter ΔP, kPa, max.		-	138	-	-	-
Oil consumption, g/kWh, max.		-	0.304	-	-	-
Mack T-9 (ASTM D6483)	Run number	1 / 2 / 3	1 / 2 / 3			
Average liner wear at 1.75% soot, μm, max.		25.4 / 26.6 / 27.1	25.4 / 26.6 / 27.1	-	-	-
Top ring weight loss, mg, max.		120 / 136 / 144	120 / 136 / 144	-	-	-
Used oil lead increase, ppm, max.		20 / 27 / 31	25 / 32 / 36	-	-	-
Lead increase from 400 to 500 h, ppm, max.		10	-	-	-	-
Mack T-10 (ASTM D6987)						
Merit rating, min.		-	-	1000	-	-
Average liner wear, μm, max.		-	-	32	-	-
Average top ring weight loss, mg, max.		-	-	158	-	-
Lead increase from 0 to 300 h, ppm, max.		-	-	35	-	-
Lead increase from 250 to 300 h, ppm, max.		-	-	14	-	-
Oil consumption, avg., g/h, max.		-	-	65	-	-
Mack T-11 (ASTM D7156)	Run number					1 / 2 / 3
Minimum % TGA Soot at 4.0 mm ² /s increase at 100°C		-	-	-	3.5	3.5 / 3.4 / 3.3
Minimum % TGA Soot at 12.0 mm ² /s increase at 100°C		-	-	-	6.0	6.0 / 5.9 / 5.9
Minimum % TGA Soot at 15.0 mm ² /s increase at 100°C		-	-	-	6.7	6.7 / 6.6 / 6.5
Mack T-12 (ASTM D7422)						1 / 2 / 3
Merit rating, min.		-	-	-	1300	-
Liner wear, avg., μm, max.		-	-	-	20	21 / 22 / 23
Top ring weight loss, avg., mg, max.		-	-	-	105	105
EOT used oil lead / new oil lead content, ppm, max.		-	-	-	30	Report
Lead increase from 250 h to 300 h, mg/kg, max.		-	-	-	12	Report
Oil consumption, avg., g/h, max.		-	-	-	80	Report

CUMMINS Engineering Standards (CES)

- 6 -



CES Number		20076	20077	20078	20081	20086 / 20087
Roller follower wear test (ASTM D5966)	Run number	1 / 2 / 3				1 / 2 / 3
Pin wear, mils max.		0.30 / 0.33 / 0.36	-	-	-	0.30 / 0.33 / 0.36
µm, max.		7.6 / 8.4 / 9.1	-	7.6	7.6	7.6 / 8.4 / 9.1
Mitsubishi 4D34T (JASO M354-1999)						
Cam lobe wear, µm., max.		-	-	95.0	-	-
Sequence IIIE (ASTM D5533)						
Viscosity increase at 64 h at 40°C from 10 min sample, %, max.		100	-	-	-	-
Sequence IIIF (ASTM D6984) / Sequence IIIG (ASTM D7320)						
Cam and tappet wear, µm, max.		-	-	20.0	-	-
Viscosity increase at EOT at 40°C, %, max.		-	-	275	275 (150)	-
Oil consumption, l, max.		-	-	5.2	-	-
OM 441 LA (CEC L-52-T-97)						
Bore polishing, avg., %, max.		-	2	-	-	-
Piston cleanliness, avg., merit, min.		-	25	-	-	-
Boost pressure loss at 400 h, %, max.		-	4	-	-	-
Oil consumption, kg/test, max		-	40	-	-	-
OM 602A (CEC L-51-A-97)						
Viscosity increase at 40°C, %, max.		-	90	-	-	-
Cam wear, avg., µm, max.		-	45.0	-	-	-
Cylinder wear (avg. 4 cyl.), µm, max.		-	20.0	-	-	-
Bore polishing, %, max.		-	7.0	-	-	-
Oil consumption, kg/test, max.		-	10	-	-	-
Piston cleanliness, avg., merit, min.		-	Report	-	-	-
Engine sludge, avg., merit		-	Report	-	-	-
Volvo T-13 (ASTM WK50204) ⁽⁴⁾	Run number					1 / 2 / 3
IR peak height at EOT, A/cm, max		-	-	-	-	80 / 80 / 80
Kinematic viscosity at 40°C, %, max		-	-	-	-	50 / 50 / 50
Average oil consumption 48-192 h, max		-	-	-	-	Report

Notes:

(1) Unless a Cummins limit is more stringent, all applicable tiered limits shall be consistent with requirements of ASTM D4485 or relevant ASTM body.

(2) Please refer to chapter "Elastomer Compatibility" and ACEA Sequence E for limits.

(3) For CES 20078, oil shall pass either Caterpillar 1K or Caterpillar 1N.

(4) Candidate base oil saturates shall be no less than the reproducibility of ASTM D2007-11 (currently 4.0 mass%) from the base oil saturates of the T-13 tested oil.

DETROIT Fluids Specification (DFS)

- 1 -



Specifications	93K214	93K215	93K218	93K222 / 93K223
API performance level	API CI-4 PLUS	API CH-4	API CJ-4	API CK-4 / API FA-4
Description	Cooled EGR-equipped engines without after treatment devices or any engine operating on Low Sulfur fuel. These engines meet 2002 to 2006 model year emission requirements.	Non-EGR-equipped engines, operating on fuel below 5000 ppm sulfur fuel.	Recommended for all four-cycle Detroit™ engines including with and without an after treatment system, EPA07/10/GHG14/GHG17 and older (including legacy engines), operating on ULSD fuel.	Recommended for all four-cycle Detroit™ engines including with and without an after treatment system, EPA07/10/GHG14/GHG17 and older (including legacy engines), operating on ULSD fuel with extended drain interval. 93K223 not recommended to use in EPA07 and older engine.
SAE J300 viscosity grades	-	-	xW-30, xW-40	xW-30, xW-40 / xW-30 (x ≥ 5)
Laboratory tests				
Sulphated ash (ASTM D874), % m/m, max.	2.0	2.0	1.0	1.0
Phosphorus (ASTM D4951, ASTM D5185), % m/m, max.	-	-	0.12	0.12
Sulphur (ASTM D4951, ASTM D2622), % m/m, max.	-	-	0.4	0.4
HTHS viscosity at 150°C (ASTM D4683), mPa.s, min.	4.2	3.5	xW-30: 3.5; xW-40: Report	xW-30: 3.5; xW-40: Report / 2.9-3.2
Shear stability (ASTM D6278 / D7109)				
Viscosity at 100°C after 30 cycles shear (ASTM D445), mm²/s, min.	-	12.5	-	-
Viscosity at 100°C after 90 cycles shear (ASTM D445), mm²/s, min.	12.5	-	xW-30: 9.3; xW-40: 12.5	xW-30: 9.3; xW-40: 12.8 / 9.3
HTHS viscosity after 90 cycles shear (ASTM D4683), mPa.s, min.	3.9	-	xW-30: Report; xW-40: 3.9	xW-30: 3.4; xW-40: 3.9 / 2.8
Low temperature pumpability (ASTM D4684 or D6896)				
MRV viscosity TP-1 at -20°C, mPa.s	-	-	-	Report
Yield stress, Pa, max.	-	-	-	35
Evaporative loss (Noack) (ASTM D5800), % loss, max.	13	18	13	13
(ASTM D5480), % loss, max.	-	15	-	-
Pour point (ASTM D97), °C, max.	-25	-25	-27	-27
Foaming tendency (ASTM D892)	No option A	No option A	Option A allowed	Option A allowed
Sequence I, II, III, ml, max.	10 / 0, 20 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0 ⁽⁴⁾	10 / 0, 20 / 0, 10 / 0 ⁽⁴⁾
Corrosion tendency (HTCBT) (ASTM D6594)				
Copper increase, ppm, max.	20	20	20	20
Lead increase, ppm, max.	120	120	120	120
Tin increase, ppm, max.	50	50	-	-
Copper strip rating (ASTM D130), max.	3	3	3	3

DETROIT Fluids Specification (DFS)

- 2 -



Specifications	93K214	93K215	93K218	93K222 / 93K223
Elastomer compatibility (ASTM D7216 / CEC L-39-96) ⁽¹⁾				
Nitrile (NBR)	Pass ⁽²⁾	Pass ⁽³⁾	Pass ⁽²⁾	Pass ⁽²⁾
Silicone (VMQ)	Pass ⁽²⁾	-	Pass ⁽²⁾	Pass ⁽²⁾
Polyacrylate (ACM)	Pass ⁽²⁾	Pass ⁽³⁾	Pass ⁽²⁾	Pass ⁽²⁾
Fluorelastomer (FKM)	Pass ⁽²⁾	Pass ⁽³⁾	Pass ⁽²⁾	Pass ⁽²⁾
Vamac G	Rate & report ⁽³⁾	Pass ⁽³⁾	Pass ⁽²⁾	Pass ⁽²⁾
Engine tests				
Low temperature pumpability of sooted oil (ASTM D4684 / D7110)				
MRV viscosity at -20°C of 75 h oil from Mack T-10, T-10A or T-11 test at 5% soot, mPa.s, max.	25000	-	-	-
MRV viscosity at -20°C of 180 h oil from Mack T-II or T-IIA test, mPa.s, max.	-	-	18000	18000
Yield stress, Pa, max.	35	-	35	35
Sequence IIIF (ASTM D6984)				
Viscosity increase at 80 h at 40°C, %, max.	275	295	275 (MTAC) ⁽⁵⁾	-
Oil consumption, l, max.	5.2	-	-	-
Sequence IIIG (ASTM D7320) (Alternative to IIIF)				
EOT viscosity increase at 40°C, %, max.			150 (MTAC) ⁽⁵⁾	-
Roller follower wear test (ASTM D5966) Run number		1 / 2 / 3	1 / 2 / 3	1 / 2 / 3
Average pin wear, mils, max.	0.30	0.30 / 0.33 / 0.36	0.30 / 0.33 / 0.36	0.30 / 0.33 / 0.36
or µm, max.	7.6	7.6 / 8.4 / 9.1	7.6 / 8.4 / 9.1	7.6 / 8.4 / 9.1
Engine oil aeration test Run number				1 / 2 / 3
EOAT (ASTM D6994), aeration, vol %, max.	-	8.0	8.0 (MTAC)	-
COAT (ASTM D8047), avg. aeration, 40 h to 50 h, %	-	-	-	11.8 / 11.8 / 11.8
Mitsubishi 4D34T4 (JASO M 354)				
Valve train wear, cam lobe wear, µm, max.	-	95	-	-
OM 441 LA (CEC L-52-T-97) ⁽⁶⁾				
Bore polishing, avg., %, max.	2.0	2.0	2.0	-
Piston deposits, avg., merit, min.	25.0	25.0	25.0	-
Boost pressure loss at 400 h, %, max.	4	4	4	-
Specific oil consumption, kg/test, max.	40	40	40	-

DETROIT Fluids Specification (DFS)

- 3 -



Specifications	93K214	93K215	93K218	93K222 / 93K223
OM 501 LA (CEC L-101-09) ^{(7), (8)}				
Piston cleanliness avg., merit, min.	-	-	19.0	20.0
Ring sticking 2 nd ring, ASF, max.	-	-	1.0	1.0
Engine sludge avg., merit, min.	-	-	9.0	9.0
General engine deposits avg., demerit, max.	-	-	2.0	2.0
Wear rating (visual) avg., demerit, max.	-	-	3.0	3.0
Bore polishing avg., %, max.	-	-	2.0	2.0
Cylinder wear avg., mm, max.	-	-	0.008	0.008
Turbocharger deposits, demerit, max.	-	-	2.0	2.0
TBN (ASTM D4739) at end of test, mg KOH/g	-	-	Rate & report	Rate & report
TAN (ASTM D664) at end of test, mg KOH/g	-	-	Rate & report	Rate & report
Specific oil consumption, g/h, max.	-	-	30.0	30.0
OM 646 DE22LA Wear test (CEC L-99-08) ⁽⁷⁾				
Cam wear inlet / outlet valve (avg. max. wear 8 cams), μm , max.	-	-	100 / 130	100 / 130
Cylinder wear (avg. 4 cylinders), μm , max.	-	-	5.0	5.0
Bore polishing (13 mm), %, max. value of 4 cylinders	-	-	3.5	3.5
Piston cleanliness (avg. 4 pistons), merit, min.	-	-	12.0	14.0
Engine sludge avg., merit, min.	-	-	8.8	8.8
Ring sticking	-	-	No	No
Tappet wear inlet (avg. max. wear 8 cams), μm	-	-	Rate & report	Rate & report
Tappet wear outlet (avg. max. wear 8 cams), μm	-	-	Rate & report	Rate & report
Bearing wear main / con rod bearing, μm , max. ⁽⁹⁾	-	-	21 / 21	21 / 21
Piston ring wear axial at ring 1 / ring 2 / ring 3, μm , max. ⁽⁹⁾	-	-	10.4 / 6.0 / 5.0	10.4 / 6.0 / 5.0
Piston ring wear radial at ring 1 / ring 2 / ring 3, μm , max. ⁽⁹⁾	-	-	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0
Timing chain wear (elongation), %, max.	-	-	0.4	0.4
Oil consumption, g/test, max.	-	-	7000	7000
Soot, %, max.	-	-	4.0 - 7.0	3.0 - 6.0
Viscosity increase at 100°C, %, max.	-	-	100	100

DETROIT Fluids Specification (DFS)

- 4 -



Specifications	93K214	93K215	93K218	93K222 / 93K223
Caterpillar 1K or 1N (ASTM D6750)	1K (1N) ⁽¹⁰⁾	1K	1N	1N
Run number		1 / 2 / 3	1 / 2 / 3	1 / 2 / 3
Weighted total demerits (WDN), max.	332 (286)	332 / 347 / 353	286.2 / 311.7 / 323.0	286.2 / 311.7 / 323.0
Top groove fill (TGF), %, max.	24 (20)	24 / 27 / 29	20 / 23 / 25	20 / 23 / 25
Top land heavy carbon (TLHC), %, max.	4 (3)	4 / 5 / 5	3 / 4 / 5	3 / 4 / 5
Oil consumption, 0-252 h, avg., g/kW-h, max.	0.5 (0.5)	0.5 / 0.5 / 0.5	0.5	0.55 / 0.54 / 0.54
Oil consumption, 0-252 h, g/MJ, max.	-	-	-	0.15 / 0.15 / 0.15
Piston ring sticking and liner scuffing	None (None)	None	None	None
Caterpillar 1R (ASTM D6923), 1P (ASTM D6681)	1R	1P		
Run number		1 / 2 / 3	-	-
Weighted total demerits (WDR), max.	382	350 / 378 / 390	-	-
Top groove carbon fill (TGC), %, max.	52	36 / 39 / 41	-	-
Top land carbon (TLC), %, max.	31	40 / 46 / 49	-	-
Average oil consumption, g/h, max.	-	14.4 / 14.6 / 14.6	-	-
Initial, 0-252 h, g/h, max.	13.1	-	-	-
Final, 432-504 h, g/h, max.	Initial + 1.8	-	-	-
Piston ring and liner scuffing	None	None	-	-
Caterpillar C13 (ASTM D7549)				1 / 2 / 3
Run number				
Merit rating, min.	-	-	1000	1000 / 1000 / 1000
Hot stuck piston rings	-	-	None	None
Top land carbon (TLC)	-	-	Rate & report	Rate & report
Top groove carbon (TGC)	-	-	Rate & report	Rate & report
Cummins M11 EGR (ASTM D6975) ⁽¹¹⁾				
Crosshead total weight loss at 4.6% avg. soot, mg, max.	20.0	-	-	-
Top ring weight loss, mg, max.	175	-	-	-
Oil filter ΔP at 250 h, kPa, max.	275	-	-	-
Engine sludge, avg., CRC merits, min.	7.80	-	-	-
Cummins M11 (ASTM RR: DO2 1439)				
Run number		1 / 2 / 3		
Crosshead weight loss, mg, max.	-	6.5 / 7.5 / 8.0	-	-
Oil filter ΔP at end-of-test, kPa, max.	-	79 / 93 / 100	-	-
Sludge rating, merits, min.	-	8.7 / 8.6 / 8.5	-	-

DETROIT Fluids Specification (DFS)

- 5 -



Specifications		93K214	93K215	93K218	93K222 / 93K223
Cummins ISM (ASTM D7468)	Run number			1 / 2 / 3	1 / 2 / 3
Merit rating, min.		-	-	1000	1000
Top ring weight loss, mg, max.		-	-	100 / 100 / 100	100 / 100 / 100
Crosshead weight loss, avg., mg		-	-	Rate & report	Rate & report
Cummins ISB (ASTM D7484)	Run number			1 / 2 / 3	1 / 2 / 3
Slider tappet weight loss, mg, avg., max.		-	-	100 / 108 / 112	100 / 108 / 112
Cam lobe wear, μm , avg., max.		-	-	55 / 59 / 61	55 / 59 / 61
Crosshead weight loss, avg., mg		-	-	Rate & report	Rate & report
Mack T-8E (ASTM D5967)	Run number		1 / 2 / 3		
Relative viscosity at 100°C at 4.8% soot, max.		-	2.1 / 2.2 / 2.3	-	-
Viscosity increase at 100°C at 3.8% soot, mm ² /s, max.		-	11.5 / 12.5 / 13	-	-
Mack T-10 (ASTM D6987)	Run number		1 / 2 / 3		
Merit rating, min.		1000	1000	-	-
Liner wear, avg., μm , max.		32	32 / 34 / 35	-	-
Top ring weight loss, avg., mg, max.		158	150 / 159 / 163	-	-
EOT used oil / new oil lead content, ppm, max.		35	50 / 56 / 59	-	-
Lead increase from 250 to 300 h, ppm, max.		14	-	-	-
Oil consumption, avg., g/h, max.		65	65	-	-
Mack T-11 (ASTM D7156)	Run number			1 / 2 / 3	1 / 2 / 3
Soot at 12.0 mm ² /s increase at 100°C from 90 pass sheared (ASTM D6278 mod.) new oil as interpolated from 2 data points, %, min.		6.00	-	-	-
TGA soot at 4.0 mm ² /s increase at 100°C, %, min.		-	-	3.5 / 3.4 / 3.3	3.5 / 3.4 / 3.3
TGA soot at 12.0 mm ² /s increase at 100°C, %, min.		-	-	6.0 / 5.9 / 5.9	6.0 / 5.9 / 5.9
TGA soot at 15.0 mm ² /s increase at 100°C, %, min.		-	-	6.7 / 6.6 / 6.5	6.7 / 6.6 / 6.5

DETROIT Fluids Specification (DFS)

- 6 -



Specifications		93K214	93K215	93K218	93K222 / 93K223
Mack T-12 (ASTM D7422)	Run number				1 / 2 / 3
Merit rating, min.		-	-	1000	-
Top ring mass loss, mg, max.					105 / 105 / 105
Cylinder liner wear, μm , max.					24.0 / 24.0 / 24.0
Mack T-13 (ASTM D8048)	Run number				1 / 2 / 3
IR peak at EOT, Abs., cm^{-1}		-	-	-	80 / 80 / 80
Kinematic viscosity increase at 40°C, %, max.		-	-	-	50 / 50 / 50
Average oil consumption, 48 h - 192 h, g/h, max.		-	-	-	Report
DD13 Scuffing test (WK53775)					
Hours-to-Scuff, h, min.		-	-	-	31

Notes:

- (1) Please refer to chapter "Elastomer Compatibility" for limits.
- (2) According to ASTM D7216.
- (3) According to CEC L-39-96.
- (4) Option A is allowed.
- (5) Either the Sequence IIIF of Sequence IIIG requirement shall be met.
- (6) Requirement can be satisfied by submitting MB 228.3 approval documentation and information relating the candidate formulation and that tested.
- (7) Requirements for the OM 501 LA and/or the OM 646DE22LA engine tests may be satisfied by a MB trading approval for MB 228.31 or 228.51 on the candidate formulation.
- (8) Only for xW-30 or OW-40: Evaluation of bearing wear in an OM 501 LA engine with new crankshaft and premeasured bearings is required. Rerating by Daimler at TP/PHC.
- (9) The worst result (outlier result) will be replaced by the second worst to calculate the average to control outliers.
- (10) Requirement can be satisfied with passing result from either Caterpillar 1K or 1N test.
- (11) M11 EGR tests ending after March 1, 2003 may not be used to satisfy this requirement. The Mack T10 (ASTM D6981) Top Ring Weight Loss max. limit of 140 mg then applies.

DEUTZ lubricating oil Quality Classes (DQC)

- 1 -



DQC I-02: Minimum oil quality, some shorter oil change intervals.

DQC II-18: Engine oil, usually used in engines with open crankcase ventilation.

DQC III-18: Standard quality, high performance diesel engine oils, for use in engines with closed crankcase ventilation and/or with high thermal loads.

DQC IV-18: Ultra high performance diesel engine oils for engines with the highest levels of output, with closed crankcase ventilation and/or with the highest thermal loads and the highest requirement for piston cleanliness (suitable for TTCD steel piston engines).

DQC II-18 LA: Low ash engine oil, usually used in engines with open crankcase ventilation.

DQC III-18 LA: Low ash high performance diesel and gas engine oil, standard quality, for use in engines with closed crankcase ventilation and/or with high thermal loads.

DQC IV-18 LA: Low ash ultra high performance diesel and gas engine oil for engines with the highest levels of output, with closed crankcase ventilation and/or with the highest thermal loads and very high requirements for piston cleanliness (suitable for TTCD steel piston engines) and extended oil change intervals.

Specifications	DQC I-02	DQC II-18	DQC II-18 LA	DQC III-18	DQC III-18 LA	DQC IV-18	DQC IV-18 LA
ACEA performance level	ACEA E2-96, API CF, or CF-4	CEA E3-96, E4-16, E5-02, E7-16, API CG-4, CH-4, CI-4, CI-4 PLUS, or DHD-1	ACEA E6-16, E9-16, or API CJ-4	ACEA E7-16 ⁽¹⁾	ACEA E9-16 ⁽¹⁾	ACEA E4-16, E7-16 ⁽¹⁾	ACEA E6-16, E9-16 ⁽¹⁾
Viscosity grades (SAE J300)	xW-30, xW-40, 15W-50, 20W-50 (x = 0, 5, 10, 15)			xW-30, xW-40 (x = 0, 5, 10, 15)		xW-30, xW-40 (x = 0, 5, 10)	
Laboratory Tests							
Density at 15°C (DIN ISO EN 12185, DIN 51757, ASTM D4052)	Report			Report		Report	
Viscosity at 40°C (DIN EN ISO 3104, DIN 51562-1, ASTM D445), mm²/s at 100°C	Report			Report		Report	
	Report			Report		Report	
HTHS viscosity at 150°C (CEC L-36-90), mPa.s, min. at 100°C	3.5			3.5		3.5	
	Report			Report		Report	
Viscosity index (VI) (DIN ISO 2209, ASTM D2270)	Report			Report		Report	

DEUTZ lubricating oil Quality Classes (DQC)

- 2 -



Specifications	DQC I-02	DQC II-18	DQC II-18 LA	DQC III-18	DQC III-18 LA	DQC IV-18	DQC IV-18 LA
Shear stability (CEC L-14-93, ASTM D6278, D7109)	Stay in grade			Stay in grade		Stay in grade	
Viscosity at 100°C after 30 cycles shear (ASTM D445), mm ² /s	Stay in grade			Stay in grade		Stay in grade	
Viscosity at 100°C after 90 cycles shear (ASTM D445), mm ² /s							
Low temperature pumping viscosity (ASTM D4684, CEC L-105-12), mPa.s, max.	according to SAE J300			according to SAE J300		according to SAE J300	
Low temperature cranking viscosity (DIN 51377, ASTM D5293), mPa.s	Report			Report		Report	
Evaporative loss (Noack) (CEC L-40-93, DIN 51581-13), %, max.	as ACEA or API			12		11	
TAN (DIN EN 12634, ASTM D664), mg/KOH/g	Report			Report		Report	
TBN (DIN ISO 3771, ASTM D2896), mg KOH/g, min.	as ACEA or API			9	7	12	7
Sulfated ash (DIN 51575, ASTM D874), % m/m, max.	as ACEA or API; DQC II-18 LA: ≤1.0			2.0	1.0	2.0	1.0
Ca, Mg, Zn, Mo, Bo, Na, Si, K (DIN 51391-2, -3, 51399-1, -2, 51443-2 (Bo), ASTM D4951)	Report			Report		Report	
Chlorine (DIN ISO 15597, ASTM D6443), % m/m, max.	0.015			0.015		0.015	
Phosphorus (DIN 51399-1, -2, ASTM D4951), % m/m, max.	Report			Report	0.12	Report	0.08
Sulfur (DIN 51399-1, -2, DIN EN ISO 14596, 16591, ASTM D4951), % m/m, max.	Report			Report	0.4	Report	0.3
Flash point (COC) (DIN EN ISO 2592, ASTM D92), °C, min.	Report			Report		Report	
Pourpoint (DIN ISO 3016, ASTM D97), °C, max.	Report			Report		Report	
Oxidation induction time (PDSC) (CEC L-85-99), min, min.	as ACEA or API			70	70	70 ⁽²⁾ / 110 ⁽³⁾	70
Oil oxidation with biodiesel , CEC L-109-14							
Oxidation increase after 168 h, A/cm, max.	-			120	90	90	80
Kinematic viscosity increase at 100°C after 168 h, %, max.	-			300	150	130	130
Corrosion (HTCBT) (ASTM D6594)							
Copper, ppm increase, max.	as ACEA or API			20		20	
Lead, ppm increase, max.	as ACEA or API			90		70	
Copper strip rating (ASTM D130), max.	as ACEA or API			3		3	
Elastomer compatibility (CEC-L-116-16) ⁽²⁾	according to ACEA			according to ACEA		according to ACEA	
Foaming tendency (ASTM D892) (No option A), ml, max.	as ACEA or API			according to ACEA		according to ACEA	
High temp foaming tendency (ASTM D6082), ml, max.	as ACEA or API			according to ACEA		according to ACEA	
Turbocharger deposits (DIN 51535), mg, max.	-			110		90 ⁽⁵⁾	

DEUTZ lubricating oil Quality Classes (DQC)

- 3 -



Specifications	DQC III-10	DQC III-10 LA	DQC IV-10	DQC IV-10 LA
Engine Tests				
OM 646 LA (CEC-L-99-A-08)				
Cam wear outlet, average, μm , max.		140		120
Cam wear inlet, average, μm , max.		110		100
Cylinder wear, average, μm , max.		5.0		5.0
Bore polishing, %, max.		3.5		3.0
Tappet wear, inlet		Rate & report		Rate & report
Tappet wear, outlet		Rate & report		Rate & report
Viscosity increase at 100°C, %, max.		100		100
Oil consumption, target value, kg/test, max.		7		7
Mack T-8E (ASTM D5967) Run number		1 / 2 / 3		1 / 2 / 3
Relative viscosity at 4.8% soot (300 h), %, max.		2.1 / 2.2 / 2.3		2.1 / 2.2 / 2.3
Mack T-11 (ASTM D7156), alternative to Mack T-8E				
Minimum TGA soot at 4.0 mm ² /s increase at 100°C, %, max.	-	3.5 / 3.4 / 3.3		-
Minimum TGA soot at 12.0 mm ² /s increase at 100°C, %, max.	6.0 / 5.9 / 5.9	6.0 / 5.9 / 5.9		6.0 / 5.9 / 5.9
Minimum TGA soot at 15.0 mm ² /s increase at 100°C, %, max.	-	6.7 / 6.6 / 6.5		-
OM 501 LA (CEC L-101-08)				
Bore polishing, avg., %, max.		2.0		1.0
Piston cleanliness, avg., merit, min.		17		30
Turbocharger deposits, demerit, max.		Rate & report		Rate & report
Oil consumption, kg/test, max.		9		9
Sludge, avg., merit, min.		Rate & report		Rate & report
Wear (visual), avg., demerit, max.		Rate & report		Rate & report
Total deposits, avg., demerit, max.		Rate & report		Rate & report
Cylinder wear, μm , max.		Rate & report		Rate & report
Ring sticking piston ring 2, ASF, max.		Rate & report		Rate & report
Cummins ISM (ASTM D7468)				
Rocker pad weight loss at 3.9% soot, avg., mg, max.	7.5	7.1	7.5	7.1
Oil filter ΔP at 150 h, kPa, max.	55	19	55	19
Engine sludge, avg., merit, min.	8.1	8.7	8.1	8.7
Adjusting screw weight loss, mg, max.	-	49	-	49

DEUTZ lubricating oil Quality Classes (DQC)

- 4 -



Specifications	DQC III-18	DQC III-18 LA	DQC IV-18	DQC IV-18 LA
Mack T-12 (ASTM D7422), alternative to Volvo T-13 for DQC III-18 LA				
Merit rating, min.	1150 ⁽⁶⁾	1150 ⁽⁶⁾ / 1200 ⁽⁷⁾	1300 ⁽⁶⁾	Volvo T-13 mandatory
Liner wear, avg., µm, max.	26	26	24	
Top ring weight loss, avg., mg, max.	117	105	117	
Lead end-of-test, mg/kg, max.	42	35	42	
Δ lead 250-300 h, mg/kg, max.	18	15	18	
Oil consumption (phase II), g/h, max.	95	85	95	
Volvo T-13 (ASTM D8048), alternative to Mack T-12 for DQC III-18 and DQC IV-18				
FTIR Oxidation peak height at EoT, abs., max.	125	125	125	80
Viscosity increase at 40°C (300-360 h), %, max.	75	75	75	50
Nitration	Rate & report	Rate & report	Rate & report	Rate & report
Δ lead	Rate & report	Rate & report	Rate & report	Rate & report
Oil consumption, avg. 48-192 h, g/h, max.	40	40	40	40
OM 646 LA Bio (CEC L-104-16)				
Piston cleanliness, avg., merit, min.	-	RL255 + 2	-	RL255 + 4
Ring sticking, ASF	-	Rate & report	-	Rate & report
Sludge, avg.	-	Rate & report	-	Rate & report

Notes:

(1) DEUTZ requirements may be higher than the ACEA specification.

(2) If Mack T-12 engine test is used.

(3) If Volvo T-13 engine test is used instead of Mack T-12 engine test.

(4) Alternative CEC L-39-T-96 (Use either the most recent complete Daimler requirements +RE3, or complete requirements + Daimler requirements for AEM).

(5) Variation of DIN 51535: Calibration with RL 206 and FES T-XH5-12.

(6) Merit calculation as per API CI-4.

(7) Merit calculation as per API CJ-4.

FIAT service fill engine oil specifications, conventional SAPS



FIAT 9.55535 Specifications	G1	G2	M2	N1	N2	Z2
Chrysler equivalent	MS-50081	-	MS-12991	-	MS-12991 (only for spark ignition engines)	MS-12991 (only SAE 5W-40 for NAFTA)
Application	Service fill engine oil - Long Life - Low HTHS	Service fill engine oil - Long Life - Low HTHS	Service fill engine oil - Long Life - High HTHS	Service fill engine oil - Low HTHS	Service fill engine oil - Long Life - High HTHS	Service fill engine oil - High HTHS
Description	Energy saving oils for spark ignition engines and ethanol blended gasoline	Standard oils for spark ignition engines and ethanol blended gasoline	"Long drain" oils for spark ignition engines	Energy saving oil for Diesel engines	"Long drain" oils for spark ignition and Diesel engines	"Long drain" oils for spark ignition and Diesel engines with high features turbochargers
Fuel type	Gasoline & Ethanol	Gasoline & Ethanol	Gasoline (& Diesel)	Diesel	Diesel & Gasoline	Diesel & Gasoline
Main region	Latin America	Latin America (Brazil)	Worldwide, minimum requirement	-	India	Europe & North America
ACEA, API, or ILSAC required level	A1/B1 ⁻¹²	A3/B4 ⁻¹²	A3/B4 ⁻¹²	A5/B5 ⁻¹²	A3/B4 ⁻¹²	A3/B4 ⁻¹²
Acceptable SAE Grades	5W-30	5W-40	0W/5W-40	5W-30	0/5W-40	0/5W-40
Laboratory tests (on fresh oil)						
HTHS viscosity (CEC L-036-A-90), mPa.s	≥ 2.9	≥ 3.5	≥ 3.5	≥ 2.9 and ≤ 3.5	≥ 3.5	≥ 3.5
Noack (CEC L-40-A-93), % (m/m), max.	11.5	11.5	11.5	11.5	11.5	8.0
TBN (ASTM D2896), mg KOH/g, min.	9.0	9.0	10.0	10.0	10.0	10.0
Sulfur (DIN 51400), % (m/m), max.	0.50	0.50	0.50	0.50	0.50	0.50
Sulfated ash (ASTM D874), % (m/m), max.	1.2	1.2	1.2	1.2	1.2	1.2
Molybdenum (ASTM D4951), ppm	150-300	150-300	-	-	-	50-150
Oxidation stability (PDSC), (CEC L-085-99), min.	≥ 80	≥ 80	-	-	-	≥ 120
Oil-elastomers compatibility	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above
Physical and chemical data (FPT MEC031)	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report
FIAT engine tests						
Aeration test (LP.MEC100) (2015)	-	-	-	M756 - 1.3 M-JET2 4V E5 95hp	M756 - 1.3 M-JET2 4V E5 95hp	M758 - 1.3 M-JET 4V E6b 95hp
Air content ⁽¹⁾ , %, max.	-	-	-	10.0	10.0	10.0
Turbocharger test (LP. DUR114) (2017)	-	-	-	M756 - 1.3 M-JET2 4V E5 95hp	M756 - 1.3 M-JET2 4V E5 95hp	M758 - 1.3 M-JET 4V E6b 95hp
Air temperature variation, %, max.	-	-	-	5	5	5
Total deposit, g, max.	-	-	-	1	1	1

Notes:

(1) After oil temperature stabilization at 130°C and 4500 rpm.

FIAT service fill engine oil specifications, mid-SAPS

- 1 -



FIAT 9.55535 Specifications	S1	S2	S3	S4	T2	DS1	DSX	DM1	D3	GH2	GS1	GSX	CR1
Other requirements	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	MS-90047 Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾	Standard FPT 07988 ⁽¹⁾
Application	Service Fill Engine Oil - Mid SAPS - Low HTHS	Service Fill Engine Oil - Mid SAPS - High HTHS	Service Fill Engine Oil - Mid SAPS - High HTHS	Service Fill Engine Oil - Low SAPS - High HTHS	Service fill engine oil - Mid SAPS - High HTHS - High TBN	Service fill engine oil - Mid SAPS - Low HTHS	Service fill engine oil - Mid SAPS - Low HTHS	Service fill engine oil - Mid SAPS - Very Low HTHS	Service fill engine oil - Mid SAPS - High HTHS - High TBN	Service fill engine oil - Long Life - High HTHS	Service fill engine oil - Mid SAPS - Low HTHS	Service fill engine oil - Mid SAPS - Low HTHS	Service fill engine oil - Low HTHS
Description	Energy saving "Mid-SAPS" oils for Diesel engines Specific for high features turbochargers	"Mid-SAPS" oils for spark ignition engines	"Mid-SAPS" oils for spark ignition and Diesel engines	"Low-SAPS" oils for Diesel engines	"Mid-SAPS" - High performance oils for spark ignition and CNG-LPG engines	Energy saving "Mid-SAPS" oils specific for EURO 6 Diesel with high features turbo	Very High energy saving "Mid-SAPS" oils specific for EURO 6 Diesel with high features turbo	Very High energy saving "Mid-SAPS" oils specific for EURO 6 Diesel with high features turbo	"Mid SAPS" oils for Heavy Diesel and Light Trucks with DPF	"Mid-SAPS" high perform / "long drain" oils for spark ignition engines	Energy saving "Mid-SAPS" oils for EURO 6 spark ignition engines	Very high energy saving oils for EURO 6 spark ignition engines	Energy saving oils for spark ignition engines
Fuel type	Diesel	Gasoline	Diesel & Gasoline	Diesel	CNG & LPG	Diesel	Diesel	Diesel	Diesel	Gasoline	Gasoline	Gasoline	Gasoline
Main region	Europe (Euro 5) India & Brazil (Euro 4)	Europe	Europe	Europe	Europe	Europe	Europe	Europe		Europe	Europe	Europe	North America
ACEA, API, or ILSAC required level	C1 or C2 ¹²	C3 ¹²	C3 ¹²	C4 ¹²	C3 ¹²	C2 ¹²	C5 ¹⁶	C5 ¹⁶	API CJ-4 / SM	C3 ¹²	C2 ¹²	API SN and ILSAC GF-5	API SN and ILSAC GF-5
Other requirements	-	-	Chrysler MS-III06	RN 0720	-	-	-	-	Chrysler MS-10902	-	-	-	Chrysler MS-6395
Acceptable SAE grades	5W-30	0W/5W-40	5W-30	5W-30	0W/5W-40	0W-30	0W-20	0W-20	5W-40	5W-40 / 10W-50	0W-30	0W-20	0W/5W/10W-20/30
Laboratory tests (on fresh oil)													
HTHS viscosity (CEC L-036-A-90), mPa.s	≥ 2.9 and ≤ 3.5	≥ 3.5	≥ 3.5	≥ 3.5	≥ 3.5	≥ 2.9 and < 3.5	≥ 2.8 and ≤ 2.9	≥ 2.6 and ≤ 2.9	-	≥ 3.5	≥ 2.9 and ≤ 3.5	≥ 2.6 and ≤ 2.9	-
HTHS viscosity (ASTM D4683), mPa.s	-	-	-	-	-	-	-	-	≥ 3.5	-	-	-	≥ 2.6 for xW-20 ≥ 2.9 for xW-30
HTHS after shear (30 pass) (ASTM D6278), mPa.s	-	-	-	-	-	-	-	-	-	-	-	-	≥ 2.3 for xW-20 ≥ 2.6 for xW-30
Borderline pumping viscosity (ASTM D4684A), mPa.s	-	-	-	-	-	-	-	-	-	-	-	-	≤ 40000 at -40°C for OW-xx ≤ 40000 at -35°C for 5W-xx ≤ 50000 at -30°C for 10W-xx
Noack (CEC L-40-A-93), % (m/m), max.	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	13.0	8.0	11.0	11.0	-
TBN (ASTM D2896), mg KOH/g, min.	6.0	6.0	6.0	7.0	9.5	7.0	7.0	7.0	10.0	7.0	7.0	7.0	-
Sulfur (DIN 51 400), % (m/m), max.	-	-	-	-	-	-	-	-	-	0.30	-	-	-
Sulfur (ASTM D5185), % (m/m), max.	0.30	0.30	0.30	0.20	0.30	0.30	0.30	0.30	0.40	-	0.30	0.50	-

FIAT service fill engine oil specifications, mid-SAPS - 2 -



FIAT 9.55535 Specifications	S1	S2	S3	S4	T2	DS1	DSX	DM1	D3	GH2	GS1	GSX	CR1
Phosphorus (ASTM D5185), % (m/m), max.	0.090	0.090	0.090	0.090	0.090	0.090	0.090	0.090	-	0.090	0.090	0.080	-
Sulfated ash (ASTM D874), % (m/m), max.	0.8	0.8	0.8	0.5	0.8	0.8	1.0	1.0	1.0	0.8	0.8	1.0	-
Molybdenum (ASTM D4951), ppm	-	-	-	-	-	-	-	450-550	-	-	-	150-300	-
Oxidation stability (PDSC), (CEC L-085-99), min.	-	-	-	-	120	100	100	100	-	120	100	100	-
Flash point (ASTM D92A), °C	-	-	-	-	-	-	-	-	-	-	-	-	200
Oil-elastomers compatibility	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to API CJ-4 / SM and MS-10902	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to latest ACEA oil sequence above	According to MS-6395
Physical and chemical data (FPT MEC031)	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report
FIAT engine tests													
Aeration test (LPMEC100) (2015)	M756 - 1.3 M-JET2 4V E5 95hp	-	M756 - 1.3 M-JET2 4V E5 95hp	-	-	M758 - 1.3 M-JET 4V E6b 95hp	M758 - 1.3 M-JET 4V E6b 95hp	M758 - 1.3 M-JET 4V E6b 95hp	-	-	M062 - 1.0 Twinair NA 65hp	M062 - 1.0 Twinair NA 65hp	-
Air content ⁽²⁾ , %, max	10.0	-	10.0	-	-	10.0	10.0	10.0	-	-	≤ 10.0	≤ 10.0	-
Turbocharger test (LPDUR114) (2017)	M756 - 1.3 M-JET2 4V E5 95hp	-	M756 - 1.3 M-JET2 4V E5 95hp	-	-	M758 - 1.3 M-JET 4V E6b 95hp	M758 - 1.3 M-JET 4V E6b 95hp	M758 - 1.3 M-JET 4V E6b 95hp	-	-	-	-	-
Air temperature variation, %, max	5	-	5	-	-	5 ⁽³⁾	5 ⁽³⁾	5 ⁽³⁾	-	-	-	-	-
Total deposit at 300h, g	1	-	1	-	-	1.0	1.0	1.0	-	-	-	-	-
Accelerated DPF test (FPT DUR017)	-	-	-	-	-	M735 - 1.6 M-Jet2 4V E5 120hp	M735 - 1.6 M-Jet2 4V E5 120hp	M735 - 1.6 M-Jet2 4V E5 120hp	-	-	-	-	-
Total oil consumption, kg/test	-	-	-	-	-	Rate & Report	Rate & Report	Rate & Report	-	-	-	-	-
Engine oil analysis:	-	-	-	-	-	-	-	-	-	-	-	-	-
Soot (DIN 51452), wt%	-	-	-	-	-	Rate & Report	Rate & Report	Rate & Report	-	-	-	-	-
TBN (ASTM D664), mg KOH/g	-	-	-	-	-	Rate & Report	Rate & Report	Rate & Report	-	-	-	-	-
Viscosity increase at 40°C (ASTM D445), %	-	-	-	-	-	Rate & Report	Rate & Report	Rate & Report	-	-	-	-	-
Fe content (suitable method to be declared), ppm	-	-	-	-	-	Rate & Report	Rate & Report	Rate & Report	-	-	-	-	-
Pb content (suitable method to be declared), ppm	-	-	-	-	-	Rate & Report	Rate & Report	Rate & Report	-	-	-	-	-

FIAT service fill engine oil specifications, mid-SAPS - 3 -



Oronite

FIAT 9.55535 Specifications	S1	S2	S3	S4	T2	DS1	DSX	DM1	D3	GH2	GS1	GSX	CR1
Engine wear:	-	-	-	-	-	-	-	-	-	-	-	-	-
Rod bearing loss average top, μm	-	-	-	-	-	≤ 6	≤ 6	≤ 6	-	-	-	-	-
Main bearing loss average bottom, μm	-	-	-	-	-	≤ 4	≤ 4	≤ 4	-	-	-	-	-
Cam profile max wear (h max), μm	-	-	-	-	-	≤ 20	≤ 20	≤ 20	-	-	-	-	-
Cam profile max wear (base radius), μm	-	-	-	-	-	≤ 5	≤ 5	≤ 5	-	-	-	-	-
Camshaft max wear, μm	-	-	-	-	-	≤ 7	≤ 7	≤ 7	-	-	-	-	-
Engine cleanliness rate (CEC M-02-A-78):	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring sticking, merit	-	-	-	-	-	≥ 8.5	≥ 8.5	≥ 8.5	-	-	-	-	-
Varnish average, merit	-	-	-	-	-	≥ 3.0	≥ 3.0	≥ 3.0	-	-	-	-	-
NEDC simulation (CAL006)	-	-	-	-	-	M735 - 1.6 M-Jet2 4V E5 120hp	M735 - 1.6 M-Jet2 4V E5 120hp	-	-	-	-	-	-
FC reduction vs. Ref 5W-30 (TD6200510), %, min	-	-	-	-	-	1.0 (tbc)	1.0 (tbc)	-	-	-	-	-	-
Fuel economy test (FPW.VEE017)	-	-	-	-	-	-	-	M735 - 1.6 M-Jet2 4V E5 120hp	-	-	-	-	-
Fuel consumption reduction vs Ref 0W-30, %, min.	-	-	-	-	-	-	-	1.8	-	-	-	-	-

Notes:

(1) For FDR on first application complete qualification procedure is needed (Standard FPT 07988).

(2) After oil temperature stabilization at 130°C and 4500 rpm.

(3) Engine intake air temperature 20°C +/- 2°C.

FPT Engine Oil Requirements



Engine family		Recommended Engine Oil Quality					Oil Drain Interval
		ACEA C2	ACEA E4	ACEA E7	ACEA E6	ACEA E9	
Family 1 (Daily)	Euro 5, IV, V	5W-30,	-	-	-	-	Light + medium duty: 40000 km, 2 yrs, 800 h Heavy duty: 20000 km, 1 yr
	Euro 5, VI	0W-30	-	-	-	-	
Tector (Eurocargo)	Euro IV, V	-	5W-30	15W-40	-	-	Light duty: 80000 km; Medium duty: 60000 km Heavy duty: 40000 km, 1 yr (1), 800 h
	Euro VI	-	-	-	5W-30	10W-40	
CURSOR 8 (Stralis)	Euro IV, V	-	5W-30	15W-40	-	-	ACEA E4: 100000 km, 1 yr ACEA E7: 80000 km
CURSOR 9 (Stralis)	Euro VI	-	-	-	5W-30	10W-40	ACEA E6: 100000 km, 1 yr, 2000 h ACEA E9: 80000 km
CURSOR 10, 13 (Stralis)	Euro IV, V	-	5W-30	15W-40	-	-	ACEA E4: 150000 km, 1 yr ACEA E7: 100000 km
CURSOR 11, 13 (Stralis)	Euro VI	-	-	-	5W-30, 0W-20 ⁽²⁾	10W-40	ACEA E6: 150000 km, 1.5 yr ACEA E9: 100000 km, 1 yr

Notes:

- (1) ACEA E6: 1.5 yr.
(2) Exclusively PLI Urania SAE 0W-20.

FORD MOTOR COMPANY active Ford engine oil specifications

- 1 -



WSS FORD Specifications	M2C950-A	M2C948-B	M2C913-D	M2C913-C	M2C925-B	M2C917-A	M2C929-A (5W-30) M2C930-A (5W-20)	M2C945-A (5W-20) M2C946-A (5W-30) M2C947-A (0W-20)	M2C960-A1 (5W-20) M2C961-A1 (5W-30) M2C962-A1 (0W-20) M2C963-A1 (0W-30)	M2C171-F1	M2C214-B1
Fill type	Initial / Service	Service ⁽¹⁾	Initial for Diesels / Service	Service	Initial / Service	Service	929 = Service / 930 = initial	Initial / Service	Initial / Service	Initial / Service	Initial / Service
Application	New MY 2015 Transit, Mondeo and Focus with new 2.0 Diesel engine	Gasoline world-wide excl. North America	All Diesels World-wide (except where M2C950-A is specified) Allowed for Gasoline in some markets	All Diesels World-wide where fuel Sulfur level is ≤ 300 ppm. ⁽¹⁾ Allowed for Gasoline in some markets	Gasoline (Fuel Economy)	Ford Ka, Consult Ford for requirements	Gasoline	Gasoline	Gasoline	Diesel	Diesel
Fuel type	Diesel & Gasoline	Gasoline	Diesel & Gasoline	Diesel & gasoline (max 300 ppm S)	Gasoline	Diesel & Gasoline	Gasoline	Gasoline	Gasoline	Diesel	Diesel
Main region	Worldwide, excl. North America	Worldwide, excl. North America	Worldwide, excl. North America	Worldwide, excl. North America	Scheduled to be phased out	Europe	Scheduled to be phased out	US + Mexico + Latin Amerika + China	US + Mexico + Latin Amerika + China	US	US
ILSAC or API and ACEA required level	C2 -12 without MIIIFE	C2-12 without MIIIFE	A5/B5 -10	A5/B5 -08	A5/B5 -08 (2)	C3 -08	GF-4	GF-5	GF-6	API CK-4	API FA-4
Acceptable SAE Grades	0W-30	5W-20	5W-30	5W-30	5W-20	5W-40	5W-30 / 5W-20	5W-30 / 5W-20	0W-20 / 0W-30 / 5W-20 / 5W-30	According to API CK-4	According to API FA-4
HTHS viscosity (CEC L-036-90), mPa.s	≥ 2.9 & < 3.5	≥ 2.6 & < 2.9	≥ 2.9 & < 3.5	≥ 2.9 & < 3.5	≥ 2.9 & < 3.5	-	-	According SAE J300	According SAE J300	> 3.5	≥ 2.9 & ≤ 3.2
HTHS viscosity (CEC L-036-90 after CEC L-014-88 or ASTM D6278), mPa.s, min.	2.6	2.6	2.9	2.9	2.6	-	-	-	-	-	-
Shear stability (CEC L-014-93 or ASTM D6278), kin. viscosity, mm²/s	Stay in grade	≥ 6.8 - < 9.3	9.3 - <12.5	9.3 - <12.5	≥ 6.8 - < 9.3	-	-	-	≥6.5 for XW-20 ≥6.5 for XW-30	-	-
Noack, (ASTM D5800), %, max.	13	13	13	13	13	-	15	15	15	13	13
Sulfated ash (ASTM D874), % m/m, max.	0.8	0.8	1.3	1.3	1.3	-	-	-	-	-	-
Phosphorus (ASTM D4951), % m/m	≥ 0.06 & ≤ 0.09	≥ 0.06 & ≤ 0.08	≤ 0.1	≤ 0.1	≤ 0.1	-	≤ 0.08	≥ 0.06 & ≤ 0.08	≥ 0.06 & ≤ 0.08	≥ 0.10 & ≤ 0.12	≤ 0.12
Sulfur (ASTM D4951, or ASTM D5453), max.	0.3	0.3	Rate & report	Rate & report	Rate & report	-	0.5	0.5	0.5	0.4	0.4
TBN (ASTM D2896), mg KOH/g, min.	7.0	7.5	10.0	8.0	8.5	-	-	-	-	-	-
Copper corrosion (ASTM D130), rating, max.	1b	1b	1b	1b	1b	-	1b	1b	-	-	-
Gelation index (ASTM D5133), max.	12	12	12	12	12	-	12	12	12	-	-

FORD MOTOR COMPANY active Ford engine oil specifications

- 2 -



WSS FORD Specifications	M2C950-A	M2C948-B	M2C913-D	M2C913-C	M2C925-B	M2C917-A	M2C929-A (5W-30) M2C930-A (5W-20)	M2C945-A (5W-20) M2C946-A (5W-30) M2C947-A (0W-20)	M2C960-A1 (5W-20) M2C961-A1 (5W-30) M2C962-A1 (0W-20) M2C963-A1 (0W-30)	M2C171-F1	M2C214-B1
Fill type	Initial / Service	Service ⁽³⁾	Initial for Diesels / Service	Service	Initial / Service	Service	929 = Service / 930 = initial	Initial / Service	Initial / Service	Initial / Service	Initial / Service
TEOST MHT4 (ASTM D7097), high temp. dep., mg, max.	35	35	35	35	35	-	30	35	-	-	-
Ball rust test (ASTM D6557), average grey value, min.	100	100	100	100	100	-	100	100	100	-	-
Daimler biodiesel oxidation test , average of 3 runs, A/cm, max.	35	-	50	-	-	-	-	-	-	-	-
Aged oil low temp viscosity , Seq. IIIGA or ROBO (ASTM D7528 or D7320), mPa.s	≤ 60000	≤ 60000	EOT Sample must show no yield stress. D4684 below SAE J300. If CCS used ≤ CCS grade then run MRV TP-1 at original grade if CCS used ≥ max original grade then run MRV TP-1 at next higher grade.	-	-	-	-	-	-	-	-
Ford timing belt compatibility (CEC-L-039-96 procedure)	Pass ⁽⁴⁾	Pass ⁽⁴⁾	Pass ⁽⁴⁾	-	-	-	-	-	-	-	-
MI11 fuel economy (CEC L-054-96), average of 3 tests, %	-	-	≥ 3.0	≥ 3.0	≥ 3.3	-	-	-	-	-	-
Ford gasoline fuel economy test at ISP , %	> 0.6% vs 5W-20 WSS M2C925-B Ref Oil	> 0.7% vs 5W-20 WSS M2C925-B Ref Oil	-	-	-	-	-	-	-	-	-
Ford diesel fuel economy test at ISP , %	> 0.75% vs 5W-30 WSS M2C913-D Ref Oil	-	-	-	-	-	-	-	-	-	-
Ford gasoline durability test at ISP	-	-	-	-	-	-	-	-	-	-	-
Ford diesel test for chain wear at ISP	Pass	-	Pass	-	-	-	-	-	-	-	-
Ford valve train wear test									-	Pass ⁽⁵⁾	-

Notes:

(1) Can be used in regions with higher S fuel levels up to 3000 ppm, but with reduced drain interval.

(2) ACEA A5/B5 quality, but in 5W-20 viscosity grade.

(3) For Initial Fill M2C948-A is used. This spec has the Seq. VID added.

(4) Please refer to chapter "Elastomer Compatibility" for limits.

(4) Ford valve train wear test in development. Preliminary approval may be granted based on a) previously licensed CJ-4 formulation that is also licensable to CK-4;

b) previously licensed CJ-4 oil with an antioxidant boost to pass the T-13 test that also licensable to CK-4; c) vehicles testing conducted on F-Series 6.7L Super Duty Vehicle(s).

GM engine oil specifications

- 1 -



Specifications	dexos1™	dexos1™ gen 2	dexos2™
Application	Service Fill: Gasoline excluding European region	Factory Fill: Gasoline worldwide (incl. E85, CNG, LPG) Service Fill: Gasoline excluding European region	Factory Fill: Diesel worldwide Service Fill: Diesel worldwide and Gasoline in European region
Laboratory tests			
SAE viscosity grade, Service Fill , SAE J300	0/5W-20/30	0/5W-16/20/30	0/5W-30/40
SAE viscosity grade, Factory Fill , SAE J300	0/5W-20/30	0/5W-16/20/30	5W-30, 0W-40
HTHS viscosity (CEC L-36-A-90 or ASTM D4741), mPa*s, min.	xW-20: 2.6 / xW-30: 2.9	xW-16: 2.3 / xW-20: 2.6 / xW-30: 2.9	3.5
Low temperature cranking viscosity (ASTM D5293)	Standard per SAE J300	Standard per SAE J300	Standard per SAE J300
Low temperature pumping viscosity (ASTM D4684)			
At -40°C, ASTM D4684, mPa*s, no yield stress, max.	-	0W-xx: 40000 / 5W-xx: Report	-
At -35°C, ASTM D4684, mPa*s, no yield stress, max.	-	0W-xx: Report / 5W-xx: 40000	-
At -30°C, ASTM D5133, mPa*s, no yield stress, max.	-	Rate & Report	-
At -25°C, ASTM D5133, mPa*s, no yield stress, max.	-	Rate & Report	-
At -20°C, ASTM D5133, mPa*s, no yield stress, max.	-	Rate & Report	-
At -15°C, ASTM D5133, mPa*s, no yield stress, max.	-	Rate & Report	-
Gelation index (ASTM D5133), mPa*s, max.	-	12	
Kinematic viscosity (DIN ISO 3104 / ASTM D445), mm²/s			-
At 40°C	Rate & Report	Rate & Report	
At 100°C	-	xW-16: ≥ 6.1 & < 8.2	Rate & Report
At 100°C	xW-20: ≥ 6.9 & < 9.3	xW-20: ≥ 6.9 & < 9.3	-
At 100°C	xW-30: ≥ 9.3 & < 12.5	xW-30: ≥ 9.3 & < 12.5	-
Shear stability (CEC L-14-A-93)			xW-30: ≥ 9.3 & < 12.5 / xW-40 ≥ 12.5 & < 15.0
Kinematic viscosity at 100°C, mm²/s, range	-	Stay within GM fresh oil limits	
HTHS at 150°C, mPa*s, min.	-	xW-16: 2.1 / xW-20: 2.4 / xW-30: 2.7	-
Noack volatility (CEC L-40-A-93 / ASTM D5800), % loss (A method), max.	13.0%	Avg of 3 consecutive runs: 13.0%	-
Sulfated ash , (DIN 51 575 / ASTM D874), % m/m, max	1.0	1.0	13.0%
TBN (ASTM D2896), mg KOH/g, min.	6.0	6.0	0.8
Chlorine (ISO 15597), mg/kg, max.	150	150	6.0
Phosphorus (DIN 51363-3/-2 or ASTM D4951), mg/kg, max.	850	850	150
Sulfur (DIN ISO 14596 or ASTM D2622), mg/kg, max.	4500	4500	≥ 700 & ≤ 900
Corrosion performance (GMW16073), max.	0 (no corrosion) ⁽¹⁾	-	3500

GM engine oil specifications

- 2 -



Specifications	dexos1 [™]	dexos1 [™] gen 2	dexos2 [™]
Foaming tendency option A (ASTM D892), ml, max., foaming / settling			
Sequence I	10 / 0	10 / 0	10 / 0
Sequence II	50 / 0	50 / 0	50 / 0
Sequence III	10 / 0	10 / 0	10 / 0
High temperature foaming (ASTM D6082), max.	100 / 0	100 / 0	100 / 0
Ball rust test (ASTM D6557), average grey value, min.	100	100	100
Elastomer compatibility	Elastomer type: RE-1, RE-4 AEM SAE J2643: ACM-1, HNBR-1, VMQ-1	Elastomer type: - AEM SAE J2643: ACM-1 (or ACM-2), HNBR-1, VMQ-1, FKM-2	Elastomer type: RE-1, RE-4 AEM SAE J2643: ACM-1, HNBR-1, VMQ-1
Engine tests, ACEA			
High temperature deposits, ring sticking, oil thickening TU5JP-L4, (CEC-L-088-02) ⁽²⁾			
Ring sticking (each part), merit, min.	9.0	9.0	9.0
Piston varnish (6 elements, average of 4 pistons), merit, min.	RL 216	RL 216	RL 216
Absolute viscosity increase at 40°C between min and max values during test, mm ² /s, max.	0.8 x RL 216	0.8 x RL 216	0.8 x RL 216
Oil consumption, kg/test	Rate & Report	Rate & Report	Rate & Report
Low temperature sludge, Sequence VG (ASTM D6593-00) ⁽²⁾			
Average engine sludge, merit, min.	8.3	8.3	8.3
Rocker cover sludge, merit, min.	8.5	8.5	8.5
Average piston skirt varnish, merit, min.	7.5	7.5	7.5
Average engine varnish, merit, min.	8.9	8.9	8.9
Comp. ring (hot stuck)	none	none	none
Oil screen clogging, %, max.	10	10	10
Valve train scuffing wear, TU3M (CEC-L-038-94) ⁽²⁾			
Cam wear, average, mm., max.	10	10	10
Cam wear, max., mm, max.	15	15	15
Pad merit (average of 8 pads), merit, min.	7.5	7.5	7.5

GM engine oil specifications - 3 -



Oronite

Specifications	dexos1 [™]	dexos1 [™] gen 2	dexos2 [™]
Black sludge, M271 (MB method) ⁽³⁾			
Engine sludge, average, merit, min.	RL140 + 4Σ	RL140 + 0.4	RL140 + 4Σ
Fuel economy, M111 (CEC-L-054-96)			
Fuel economy improvement vs.reference oil RL 191 (15W40), %, min.	-	-	2%
Medium temperature dispersivity, DV6 (CEC-L-106)			
Absolute viscosity increase at 100°C and 5.5% soot, mm ² /s, max.	-	-	0.9 x RL 248 result
Piston merit			Rate & Report
Wear, OM646LA (CEC-L-099-08)			
Cam wear outlet (average max.wear 8 cams), mm, max.	-	-	120
Cam wear inlet (average max.8 cams, μm, max.	-	-	100
Cylinder wear (average 4 cyl.), μm, max.	-	-	5.0
Bore polishing (13mm) (max of 4 cyl.), %, max.	-	-	3
Tappet wear inlet (average max.wear 8 cams) , mm.	-	-	Rate & Report
Tappet outlet wear (average max.wear 8 cams), mm.	-	-	Rate & Report
Piston cleanliness (average 4 pistons), merit.	-	-	Rate & Report
Oil consumption, kg/test	-	-	Rate & Report
Engine sludge avg., merit.	-	-	Rate & Report
DI diesel piston cleanliness & ring sticking, VW TDI (CEC-L-078-99)			
Piston deposits, merit, min.	-	-	> RL 206 + Std Dev
Ring sticking, average 1 st gr, ASF, max.	-	-	1.0
Ring sticking, max. 1 st / 2 nd gr, ASF, max.	-	-	1 / 0
End of test TBN, DIN 51639-1, mgKOH/g, min.	-	-	Rate & report
End of test TAN, ASTM D664, max.	-	-	Rate & report

GM engine oil specifications

- 4 -



Specifications	dexos1™		dexos1™ gen 2		dexos2™
Engine tests, API and GM					
High temperature deposits, ring sticking, oil thickening, Seq. IIIG / IIIGA (ASTM D7320) ⁽⁴⁾					
Viscosity increase at 40°C, %, max.	150		-		150
Weighted piston deposits, merit, min.	4.5		-		4.5
Ring sticking (hot stuck)	None		-		None
Average cam + lifter wear, µm, max.	60		-		60
Oil consumption, l.	Rate & Report		-		Rate & Report
Aged oil low temperature pumping viscosity (ASTM D4684), mPa*s	Pass equal or next higher grade		-		Pass equal or next higher grade
Bearing corrosion, Sequence VIII (ASTM D6709)					
Bearing weight loss, mg, max.	26		26		26
10 h stripped viscosity, mm²/s	Stay in grade		Stay in grade		Stay in grade
NEDC fuel economy gasoline (ISP T0384-2014)					
Fuel economy improvement vs.reference oil, %, min.	-		xW-30: 0.5%, xW-20: 0.8%, xW-16: Report		-
Fuel economy, Sequence VID (ASTM D7589) ⁽⁵⁾	xW-20	xW-30	xW-20	xW-30	
FEI 2, %, min.	1.2	0.9	1.2	0.9	-
Sum of FEI, %, min.	2.6	1.9	2.6	1.9	-
GM oxidation and deposit test (GMW17043)					
Viscosity increase at 100 h, %, max.	-		100		-
Average weighted piston deposits, merit, min.	-		5.2		-
Average groove 3 Deposits, merit, min.	-		9.0		-
Average piston skirt varnish thrust side, merit, min.	-		9.0		-
Average pistonskirt varnish anti-thrust side, merit, min.	-		9.0		-
Hot stuck rings	-		none		-
Oil consumption, l.	-		Rate & Report		-
CCS viscosity (ASTM D5293), mPa*s	-		OW-xx: Report at -35°C, 5W-xx: Report at -30°C		-
Low temperature pumping viscosity (ASTM D4684), mPa*s	-		Meet requirement of original grade or next higher grade depending CCS results		-
Phosphorus retention, %, min.	-		79		-
GM aeration test (GMW17295), % Aeration					
0.5 h to 1 h aeration	-		Rate & Report		-
4 h to 5 h aeration	-		Rate & Report		-
19 h to 20 h aeration	-		Rate & Report		-
28 h to 29 h aeration	-		< GM Aeration reference oil 1		-
Maximum micro motion aeration	-		Rate & Report		-

GM engine oil specifications

- 5 -



Specifications	dexos1™	dexos1™ gen 2	dexos2™
GM pre-ignition test (GMW17244)			
Number of pre-ignition events in 5 runs, counts	-	≥ 3 of 5 consecutive tests with 0 peak pressure events, no tests with more than 2 peak pressure events	-
GM turbo charger deposit test (GMW17299)			
Turbo coolant out temperature increase, %, below	-	13	-
Average weighted turbo deposits, merit	-	Rate & Report	-
GM valve-train wear test (GMPTE-T DUR021, RNT method)			
Cam wear max., nm/h, max.	5	5	5
Tappet wear max., nm/h, max.	2	2	2
GM aeration test (GMPTE-T MEC024)			
Aeration rate of Candidate vs. Ref.Oil	Candidate < Ref.Oil	-	Candidate < Ref.Oil
Max. difference in aeration of aged Candidate vs. Ref.Oil	EOT candidate oil - Fresh Ref.Oil < +2	-	EOT candidate oil - Fresh Ref.Oil < +2
Oil release test (gasoline) , OP1 (GMPTE-T DUR020) (6)			
Function test, oil pressure, bar	Pass	Pass	Pass
Run-in oil consumption, g/h	15 - 39	15 - 39	15 - 39
Viscosity increase at 40°C (DIN ISO 3104), %, max.	130	130	130
TAN at EOT (ASTM D664), mg KOH/g, max.	8.0	8.0	8.0
Nitration at EOT (DIN 51453), A/cm, max.	30	30	30
Oil release test (diesel) (GMPTE-T DUR019)			
Piston ring clearance 1 st ring (avg.), mm, max.	-	-	0.05
Piston ring clearance 2 nd ring (avg.), mm, max.	-	-	0.15
Piston ring clearance 3 rd ring (avg.), mm, max.	-	-	0.08
Connecting rod bearing wear, µm, max.	-	-	3
Main bearing wear (avg.), µm, max.	-	-	3
Camshaft wear (avg.) µm, max.	-	-	10
Timing chain elongation, mm, max.	-	-	0.8
Duplex chain elongation, mm, max.	-	-	0.7
Balancer chain elongation, mm, max.	-	-	1.5
Piston cleanliness, merit	-	-	Rate & Report
Oil consumption, g/h, max.	-	-	15
Blow-by (max.), l/min., max.	-	-	50
Viscosity increase at 100°C and 2.5 wt% soot, mm²/s, max.	-	-	6.0

Notes:

- (1) For factory fill only.
 (2) TU5JP, Seq. VG, TU3M, M271 to be run as long as available.
 (3) M271 Sludge to be replaced by M271EVO when available.

- (4) GM does NOT accept the ROBO test as replacement for the oil aging phase for the Sequence IIIGA test.
 (5) Seq VID to be replaced by Seq VIE when available.
 (6) OP1 test to be replaced by OP2 when available.

Jaguar Land Rover Limited engine oil specifications



JLR specifications - please contact JLR for information

MAN works standards

- 1 -



Specifications	M 3275-1 / 2	M 3277 ⁽¹⁾	M 3377	M 3477	M 3575	M 3677	M 3777	M 3977
ACEA / API performance level	ACEA E7 ⁻⁰⁸ (Issue 2)	ACEA E4 ⁻⁰⁸ (Issue 2)	ACEA E4 ⁻¹²	ACEA E6 ⁻¹²	ACEA E9 ⁻⁰⁸ and API CJ-4	ACEA E6 ⁻¹²	ACEA E6 ⁻⁰⁶ , API CK-4	ACEA E6 ⁻¹²
Viscosity grades (SAE J300)	M 3275-1: 5W-x, 10W-x, 15W-x M 3275-2: 30, 40, 50	0W-x, 5W-x, 10W-x	0W-x, 5W-x, 10W-x	0W-x, 5W-x, 10W-x	xW-30, xW-40	0W-30, 5W-30, 10W-30	0W-30, 5W-30, 10W-30	0W-20, 5W-20
Laboratory tests								
Colour	-	-	-	-	-	-	-	Green
Density at 15°C (DIN 51757), g/ml	Report	Report	Report	Report	Report	Report	Report	Report
Viscosity at 40°C (DIN 51562-1) at 100°C	Report In acc. with DIN 51511	Report In acc. with DIN 51511	Report In acc. with DIN 51511	Report In acc. with DIN 51511	Report In acc. with DIN 51511	Report In acc. with DIN 51511	Report In acc. with DIN 51511	Report 7.6-9.3
Viscosity index (DIN ISO 2909)	-	Report	Report	Report	Report	Report	Report	Report
HTHS viscosity (CEC L-36-A-90), mPa.s, min.	3.5	3.5	3.5	3.5	3.5	3.5	3.5	2.6-2.9
Shear stability (DIN EN ISO 20844) Viscosity at 100°C after 90 cycles shear (DIN 51562-1), mm ² /s, min.	xW-30: 9, xW-40: 12 30, 40, 50: Stay in grade	xW-30: 9, xW-40: 12	xW-30: 9, xW-40: 12	xW-30: 9, xW-40: 12	xW-30: 9, xW-40: 12	Stay in grade	Stay in grade	Stay in grade
Evaporative loss (NOACK) (DIN 51581-1), %, max.	13	12	12	12	13	12	12	13
Flash point (COC) (DIN EN ISO 2592), °C, min.	215	215	215	215	215	215	215	215
Pour point (DIN ISO 3016), °C, max.	5W-x: -40; 10W-x: -30; 15W-x: -27 30, 40, 50: -	0W-x, 5W-x: -40; 10W-x: -30	0W-x, 5W-x: -40; 10W-x: -30	0W-x, 5W-x: -40; 10W-x: -30	xW-30: -27; xW-40: -30	10W-30: -30; 0W-30, 5W-30: -40	10W-30: -30; 0W-30, 5W-30: -40	-40
TBN (DIN ISO 3771), mg KOH/g, min.	Report	Report	Report	10	Report	10	10	10
TAN (ASTM D664), mg KOH/g, min.	Report	Report	Report	Report	Report	Report	Report	Report
Metallic constituents (Calcium, magnesium, others) (DIN 51399-1)	Report	Report	Report	Report	Report	Report	Report	Report
Zinc (DIN 51399-1), % m/m, min.	0.08	Report	Report	Report	Report	Report	Report	Report
Phosphorus (DIN 51399-1), % m/m, max.	Report	Report	0.11	0.08	0.12	0.08	0.08	0.08
Boron (DIN 51399-1), % m/m	Report	Report	-	Report	Report	Report	Report	Report
Nitrogen (additive) (calculated), % m/m	Report	Report	Report	Report	Report	Report	Report	Report
Sulfated ash (DIN 51575), % m/m, max.	2.0	2.0	1.2 - 1.5	1.0	1.0	1.0	1.0	1.0
Sulfur in finished oil (DIN EN ISO 14596) (as additive only), % m/m, max.	-	-	0.3	0.3	0.4	0.3	0.3	0.3
Ethylene glycol (DIN 51375-2), % m/m, max.	0.05	0.05	0.05	Report	0.05	Report	Report	Report
Turbocharger and intercooler deposits (MTV 5040) (DIN 51535), mg, max.	Report	120	120	100	Report	100	100	100

MAN works standards

- 2 -



Specifications	M 3275-1 / 2	M 3277 ⁽¹⁾	M 3377	M 3477	M 3575	M 3677	M 3777	M 3977
Oxidation stability (PDSC) (CEC L-85-99), min, min.	-	-	100	100	-	100	100	120
Foaming tendency (ASTM D892) (No option A)								
Sequence I, II, III, ml, max.	10 / 0, 50 / 0, 10 / 0	10 / 0, 50 / 0, 10 / 0	10 / 0, 50 / 0, 10 / 0	10 / 0, 50 / 0, 10 / 0	10 / 0, 50 / 0, 10 / 0	10 / 0, 50 / 0, 10 / 0	10 / 0, 50 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0
Sequence IV, ml, max.	-	-	-	-	-	-	-	100 / 0
Elastomer compatibility (VDA 675 301, M 3273) ⁽²⁾	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Base oil blend analysis (M3353)	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Engine tests								
OM 501 LA (CEC L-101-08)								
Piston merit, average, merit, min.	17.0	26.0	26.0	26.0	17.0	26.0	28.0	28.0
Wear rating (visual), average, demerit, max.	3.0	2.0	2.0	-	3.0	2.0	2.0	2.0
Bore polishing, average, %, max.	2.0	1.0	1.0	1.0	2.0	1.0	1.0	1.0
General engine deposits, average, demerit, max.	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Cylinder wear, average, mm, max.	0.008	0.008	0.008	-	0.008	0.008	0.008	0.008
Ring sticking, piston ring 2, ASF, max.	1.0	1.0	1.0	-	1.0	1.0	1.0	1.0
Turbocharger deposits, demerit, max.	2.0	2.0	2.0	-	2.0	2.0	2.0	2.0
Engine sludge, average, merit, min.	9.0	9.4	9.4	Rate & report	9.0	9.4	9.4	9.4
Specific oil consumption, kg/test, max.	9	9	9	9	9	9	9	9
TBN at end-of-test, mg KOH/g	Rate & report	Rate & report	Rate & report	-	Rate & report	Rate & report	Rate & report	Rate & report
TAN at end-of-test, mg KOH/g	Rate & report	Rate & report	Rate & report	-	Rate & report	Rate & report	Rate & report	Rate & report
OM 646 LA (CEC L-099-08)								
Cam wear inlet (average max. 8 cams), µm, max.	110	100	100	-	110	100	100	100
Cam wear outlet (average max. wear 8 cams), µm, max.	140	120	120	140	140	120	120	120
Cylinder wear (average 4 cyl.), µm, max.	5.0	5.0	5.0	-	5.0	5.0	5.0	5.0
Bore polishing (13 mm) (max of 4 cyl.), %, max.	3.5	3.0	3.0	-	3.5	3.0	3.0	3.0
Tappet wear inlet (average max. wear 8 cams), µm, max.	Rate & report	Rate & report	Rate & report	-	Rate & report	Rate & report	Rate & report	Rate & report
Tappet outlet wear (average max. wear 8 cams), µm, max.	Rate & report	Rate & report	Rate & report	-	Rate & report	Rate & report	Rate & report	Rate & report
Viscosity increase at 100°C, %, max.	100	90	90	-	100	90	90	90
Oil consumption, kg/test, target value, max.	7	7	7	-	7	7	7	7

MAN works standards - 3 -



Specifications	M 3275-1 / 2	M 3277 ⁽¹⁾	M 3377	M 3477	M 3575	M 3677	M 3777	M 3977
Mack T-13 (ASTM D8048)								
IR Oxidation peak height at 360 h, A/cm, max.	-	-	-	-	-	-	80	80
KV40 increase (300 - 360 h), %, max.	-	-	-	-	-	-	50	50
Field test (M 3554)								
Field test with three MAN trucks	-	-	-	-	-	Pass	Pass	Pass

Notes:

(1) Approval of engine oils and additive packages will be dependent on the results in the test engines OM501LA and OM646LA. Alternatively, these two CEC tests may be replaced with the 400 h test in the MAN D2876 LF04 engine.

(2) Please refer to chapter "Elastomer Compatibility" for limits.

(3) Test fuel in accordance with EN 590, but with a sulphur content <10 mg/kg and without addition of FAME.

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 1 -



MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
Mono-/multigrade viscosities	Multi	Multi	Multi	Multi	Multi	Multi	Multi	Multi	Multi	Multi
Viscosity grades (SAE J300)	0W-, 5W-30, 0W-, 5W-, 10W-40	0W-, 5W-30, 0W-, 5W-40	0W-, 5W-30, 10W-X	0W-, 5W-30, 10W-X	0W-, 5W-30, 10W-X	0W-, 5W-30, 10W-X	0W-, 5W-X	0W-, 5W-30	0W-, 5W-30	0W-, 5W-20
SAE xW-30 and 0W-40	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Only 0W-/ 5W-30	Only 0W-/ 5W-30	No
DBL, Read Across guidelines, ACEA, API, DDC										
Related Daimler Liefervorschrift (DBL)	6615	6615	6615	6615	6615	6615	6615	6615	6615	6615
MB read across ⁽⁵⁾	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Package pass ⁽⁵⁾	No	No	No	No	No	No	No	No	No	No
ACEA Oil Sequences required	If any ACEA Ax, Bx, Cx, Ex or Fx oil sequence is claimed all tests within this oil sequence are mandatory.									
RN oil specification level, RN certificate is mandatory, validity acc. to RN certificate	RN0710	RN0720	-	-	-	-	-	-	-	-
Laboratory tests										
Sulphated ash (DIN 51575 or ASTM D874), % m/m, max	≥ 0.7 & ≤ 1.5	0.5	> 0.9 & ≤ 1.5	0.8	> 1.0 & ≤ 1.6	0.8	0.8	> 1.0 & ≤ 1.6	≤ 0.8	≤ 0.8
TBN (ASTM D2896), fresh oil, mg KOH/g, min.	8.0	6.0	7.0	6.0	10.0	6.0	6.0	8.0	7.5	7.5
TBN (ASTM D4739), fresh oil, mg KOH/g	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TAN (ASTM D664), fresh oil, mg KOH/g	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Density at 15°C (DIN 51575), kg/m ³	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Flash point (DIN EN ISO 2592, ASTM D92), °C	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Pour point (ISO 3016 or ASTM D97), °C, max.	Rate & report	Rate & report	-27	-27	-27	-27	-36	-36	-39	-39
Evaporative loss (Noack) (CEC L-40-93, ASTM 5800), %, max.	12	11	13	12	10	10	10	10	10	11
Kinematic viscosity (ASTM D445, DIN 51562-1), mm ² /s										
KV at 40°C	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
KV at 100°C	-	-	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	≥ 7.8
Viscosity at High Temperature and High Shear (CEC L-36-90), mPa.s, min										
HTHS at 100°C	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
HTHS at 150°C	≥ 3.5	≥ 3.5	≥ 3.5	≥ 3.5	≥ 3.5	≥ 3.5	≥ 3.5	≥ 2.9 & < 3.2	≥ 2.9 & < 3.2	≥ 2.6 & < 2.9

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 2 -



MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
Shear stability (CEC L-14-93, ASTM D6278, 30 cycles / ASTM D7109, 90 cycles)	at 30 cycles	at 30 cycles	at 30 cycles	at 30 cycles	at 90 cycles	at 90 cycles	at 90 cycles	at 90 cycles	at 90 cycles	at 90 cycles
Kin. viscosity at 100°C after 30 / 90 cycles shearing, mm ² /s	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade
Chemical elements										
Zinc (DIN 51399 -1/2, ASTM D4951, ASTM D5185), % m/m, min.	Rate & report	Rate & report	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
Sulphur (DIN 51399 -1/2, ASTM D4951, ASTM D5185), % m/m, max.	Rate & report	0.2	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.3
Phosphorus (DIN 51399 -1/2, ASTM D4951, ASTM D5185), % m/m, max.	Rate & report	0.9	0.05 - 0.11	0.05 - 0.09	0.05 - 0.11	0.05 - 0.09	0.05 - 0.09	0.07 - 0.11	0.07 - 0.09	0.07 - 0.09
Chlorine (DIN 51399-2, ASTM D6443), % m/m, max.	Rate & report	Rate & report	0.015	0.015	0.015	0.015	0.010	0.010	0.010	0.010
Calcium (DIN 51399-1/2, ASTM D4951, ASTM D5185)	-	-	0.4	0.3	0.4	0.3	0.3	0.4	0.3	0.3
Magnesium (DIN 51399-1/2, ASTM D4951)	-	-	0.4	0.3	0.4	0.3	0.3	0.4	0.3	0.3
Elements B, Ba, Mo, N, Si, % m/m	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Dielectric constant ϵ_r of fresh oil										
Temic oil sensor (DAI) test method at 20°C - 100°C, % m/m	-	-	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5
Daimler oxidation test - fresh oil at 160°C (Daimler oxidation test procedure)										
Kin. viscosity at 100°C, EOT 168 h, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oxidation DIN 51453 at EOT 168 h, A/cm, max.	-	-	60	60	25	25	20	20	20	20
Δ kin. viscosity at 100°C, absolute, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Δ kin. viscosity at 100°C, relative, %, max.	-	-	80	80	70	70	50	50	50	50

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 3 -



Oronite

MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
Daimler oxidation test - with fuel dilution 5% B100 at 160°C (FAME from OM 646 Biodiesel test)										
Kin. viscosity at 100°C, EOT 168 h, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oxidation at EOT 168 h, A/cm, max. (DIN 51453)	-	-	100	100	80	80	40	40	40	40
Δ kin. viscosity at 100°C, absolute, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Δ kin. viscosity at 100°C, relative, %, max.	-	-	120	80	70	70	50	50	50	50
Oxidation test - with fuel dilution 7% B100 at 150°C (CEC L-109) (FAME from OM 646 Biodiesel test)										
Kin. viscosity at 100°C, EOT 168 h, avg. 2 runs, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Kin. viscosity at 100°C, EOT 216 h, avg. 2 runs, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oxidation at EOT 168 h, avg. 2 runs, A/cm, max. (DIN 51453)	-	-	120	100	100	80	50	100	50	50
Oxidation at EOT 216 h, avg. 2 runs, A/cm, max. (DIN 51453)	-	-	150	120	120	100	80	120	80	80
Δ kin. viscosity 168 h, avg. of 2 runs, absolute, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Δ kin. viscosity 168 h, avg. of 2 runs, relative, %, max.	-	-	150	60	60	60	50	60	50	50
Δ kin. viscosity 216 h, avg. of 2 runs, absolute, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Δ kin. viscosity 216 h, avg. of 2 runs, relative, mm ² /s, max.	-	-	350	150	150	150	100	150	100	100
TOC oxidation test (D55 3099)										
TAN, mg KOH/g	R&R at 80 h	R&R at 96 h	-	-	-	-	-	-	-	-
PAI CO, max.	400 at 80 h	400 at 96 h	-	-	-	-	-	-	-	-
Variation of viscosity at 40°C, %, max.	200 at 80 h	200 at 96 h	-	-	-	-	-	-	-	-
Variation of viscosity at 100°C, %	R&R at 80 h	R&R at 96 h	-	-	-	-	-	-	-	-
MCT cokefaction test (GFC Lu 27), merit, min.	7.0	7.0	-	-	-	-	-	-	-	-

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 4 -



Oronite

MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
SRV (Schwing Reib Verschleiß) tTest, PC ring / liner (MBN10474, SRV version 4 to be applied) ⁽²⁾										
Load carrying capacity, fresh oil, avg. 5 runs, N, min.	-	-	100	-	150	100	100	100	100	100
Coefficient of friction, fresh oil, avg. of 5 runs, μ r, max.	-	-	Rate & report	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Load carrying capacity, aged oil, avg. 5 runs, N, min.	-	-	Rate & report	-	60	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Coefficient of friction, aged oil, avg. of 5 runs, μ r, max.	-	-	Rate & report	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
CCS (according to SAE J300, fresh oil)										
At SAE J300 fresh oil temperatures, mPa.s, max.			Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300
MRV (according to SAE J300, fresh oil)										
MRV at SAE J300 fresh oil temperature, mPa.s, max.	-	-	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	30000	30000	30000	30000
Yield stress, Pa	-	-	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300
CEC Low temperature pumping test (CEC L-105) ⁽²⁾										
MRV at SAE J300 fresh oil temperature, mPa.s, max.	-	-	According to SAE J300 for fresh oil							
Yield stress, Pa, max.	-	-	No	No	No	No	No	No	No	No
High Temperature Corrosion Bench Test (HTCBT) (modified ASTM D6594 at 135 °C)										
Cu increase, without / with 10% B100*, ppm, max.	-	-	20 / 200	20 / 200	20 / 150	20 / 150	20 / 150	20 / 150	20 / 150	20 / 150
Pb increase (only fresh oil), ppm, max.	-	-	100	100	100	100	100	100	100	100
Copper strip rating, without / with 10% B100*, max.	-	-	3 / 4a	3 / 4a	3 / 4a	3 / 4a	3 / 4a	3 / 4a	3 / 4a	3 / 4a
* Reference fuel B100 (80/20 RME/SME from OM 646 TDG-L-104)										

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 5 -



MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
Foaming tendency (ASTM D892)										
Sequence I (24°C) (ASTM D892 w/o option A), ml, max.	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
Sequence II (94°C) (ASTM D892 w/o option A), ml, max.	50 / 0	50 / 0	20 / 0	20 / 0	20 / 0	20 / 0	20 / 0	20 / 0	20 / 0	20 / 0
Sequence III (24°C) (ASTM D892 w/o option A), ml, max.	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
Sequence IV (150°C) (ASTM D6082 after 1 min settling period), ml, max.	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0
Elastomer compatibility										
According ACEA (CEC L-112-16)	A3/B3	C4	A3/B3	C3	A3/B4	C3	C3	A5/B5	C2	C5
Infrared spectrum (window material KBr, ZnSe, NaCl, cell thickness 100-125 µm)	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Brand name / Type / Content of										
Base oil acc. ATIEL	Report	Report	Report	Report	Report	Report	Report	Report	Report	Report
Additive package	Report	Report	Report	Report	Report	Report	Report	Report	Report	Report
Any additional additive component (e.g. PPD, VII, anti foam additive)	Report	Report	Report	Report	Report	Report	Report	Report	Report	Report

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 6 -



Oronite

MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
Engine tests										
M 271 sludge test (M 271 classic sludge DL, until M 271 EVO, CEC L-107, is ready at CEC) ⁽²⁾										
Engine sludge, avg., merit, min.	RL140 + 4σ	RL140 + 4σ	8.8	8.8	9.1	9.1	9.1	9.1	9.1	9.1
M 271 EVO sludge (CEC L-107 when ready at CEC, as alternative to M 271 Sludge Test) ⁽²⁾										
Engine sludge, avg., merit, min.	-	-	RL261 + 4xRSD	RL261 + 4xRSD	RL261 + 4xRSD	RL261 + 4xRSD	RL261 + 4xRSD	RL261 + 4xRSD	RL261 + 4xRSD	RL261 + 4xRSD
M 271 wear test (MB DL, wear 250 h) ⁽²⁾										
Cam wear inlet / outlet valve, avg. max. wear 8 cams, μm, max.	-	-	5.0 / 5.0	5.0 / 5.0	5.0 / 5.0	5.0 / 5.0	5.0 / 5.0	5.0 / 5.0	5.0 / 5.0	5.0 / 5.0
Piston ring wear radial ring 1 / 2, avg., μm, max. ⁽⁴⁾	-	-	5.0 / 12.0	5.0 / 12.0	5.0 / 12.0	5.0 / 12.0	5.0 / 12.0	5.0 / 12.0	5.0 / 12.0	5.0 / 12.0
Piston ring wear axial ring 1 / groove 1, avg., μm, max. ⁽⁴⁾	-	-	5.0 / 15.0	5.0 / 15.0	5.0 / 15.0	5.0 / 15.0	5.0 / 15.0	5.0 / 15.0	5.0 / 15.0	5.0 / 15.0
Ring sticking	-	-	No	No	No	No	No	No	No	No
Main bearing wear, avg., μm, max.	-	-	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5
Conrod bearing wear, avg., μm, max.	-	-	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5	1.5 / 3.5
Timing chain wear (elongation), %, max.	-	-	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Timing chain wear (single chain link), %, max.	-	-	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
M 111 fuel economy (CEC L-54-96)										
Fuel economy improvement vs. RL252 (15W-40), %, min.	1.0	1.0	1.0	1.0	xW-30: 2.0	xW-30: 2.0	xW-30: 2.2	2.5	2.5	3.0
	(for xW-30) (C3)	(for xW-30)			xW-40: 1.7	xW-40: 1.7	xW-40: 1.7			

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 7 -



Oronite

MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
NEDC MB fuel economy tests - (FE benefit in NEDC, PC chassis dynamometer Test) for OW-30/-40 and 5W-30/-40 vs. MB RLO01 Otto & MB RLO02 Diesel ⁽³⁾										
FE in W204 C250 CDI / engine: OM651 vs. MB RLO02, %, min.	-	-	-	-	-	xW-30: 0.5 xW-40: R & R	xW-30: 1.2 xW-40: 0	-	1.4	1.7
FE in W204 C320 CDI / engine: OM642 vs. MB RLO02, %, min.	-	-	-	-	-	xW-30: 0.7 xW-40: R & R	xW-30: 1.2 xW-40: 0	-	1.8	2.7
FE in W204 C200 K / engine: M271 ML 18 vs. MB RLO01, %,min.	-	-	-	-	xW-30: 0 xW-40: R & R	xW-30: -0.5 xW-40: R & R	xW-30: 0 xW-40: R & R	0.5	0.5	1.0
FE in W204 C350 CGI / engine: M271 DE35 vs. MB RLO01, %, min.	-	-	-	-	xW-30: 0	-	-	0.4	0.4	0.8
OM 646 DE22LA wear test (CEC L-99-08) ⁽²⁾										
Cam wear inlet / outlet valve (avg. max. wear 8 cams), µm, max.	100 / 120	100 / 120	100 / 130	100 / 130	90 / 110	90 / 110	90 / 110	90 / 110	90 / 110	90 / 110
Cylinder wear (avg. 4 cylinders), µm, max.	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Bore polishing (13 mm), value of 4 cylinders, %, max.	3.0	3.0	3.5	3.5	3.0	3.0	3.0	3.0	3.0	3.0
Piston cleanliness (avg. 4 pistons), merit, min.	Rate & report	Rate & report	12.0	14.0	14.0	16.0	16.0	14.0	16.0	16.0
Engine sludge avg., merit, min.	Rate & report	Rate & report	8.8	8.8	9.1	9.1	9.1	9.1	9.1	9.1
Ring sticking	Rate & report	Rate & report	No	No	No	No	No	No	No	No
Tappet wear inlet (avg. wear 8 cams), µm	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Tappet wear outlet (avg. wear 8 cams), µm	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Bearing wear main / con rod bearing, µm, max. ⁽⁴⁾	Rate & report	Rate & report	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1
Piston ring wear axial ring 1 / 2 / 3, µm, max. ⁽⁴⁾	Rate & report	Rate & report	10.4/6.0/5.0	10.4/6.0/5.0	8.7/4.0/3.0	8.7/4.0/3.0	8.7/4.0/3.0	8.7/4.0/3.0	8.7/4.0/3.0	8.7/4.0/3.0
Piston ring wear radial ring 1 / 2 / 3, µm, max. ⁽⁴⁾	Rate & report	Rate & report	10.0/12.0/8.0	10.0/12.0/8.0	10.0/12.0/8.0	10.0/12.0/8.0	10.0/12.0/8.0	10.0/12.0/8.0	10.0/12.0/8.0	10.0/12.0/8.0
Timing chain wear (elongation), %, max.	Rate & report	Rate & report	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
Oil consumption, g/test, max.	Rate & report	Rate & report	7000	7000	7000	7000	7000	7000	7000	7000
Soot, %, max.	Rate & report	Rate & report	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0
Viscosity increase at 100°C, %, max.	Rate & report	Rate & report	100	100	90	90	90	90	90	90

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 8 -



MB Sheet No. ⁽¹⁾	226.5	226.51	229.3	229.31	229.5	229.51	229.52	229.6	229.61	229.71
OM 646 DE22LA biodiesel test (CEC L-104) ⁽²⁾										
Piston cleanliness, avg. 4 pistons, merit, min.	-	-	20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0
Engine sludge, avg., merit, min.	-	-	8.8	8.8	9.0	9.0	9.2	9.2	9.2	9.2
Ring sticking	-	-	No	No	No	No	No	No	No	No
TBN at EoT (ASTM D4739), mg KOH/g, min.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TAN at EoT (ASTM D664), mg/KOH/g, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oil consumption, g/test, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Soot, %, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Viscosity increase at 100°C, %, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Daimler OM 646 DE22LA aeration test (Daimler inhouse test)										
Gas content in engine oil - high reference oil, after 5 h, vol.%	-	-	-	-	-	-	-	-	Rate & report	Rate & report
Gas content in engine oil - candidate oil, after 5 h, vol.%	-	-	-	-	-	-	-	-	Rate & report	Rate & report
Gas content in engine oil - high reference oil, after 20 h, vol.%	-	-	-	-	-	-	-	-	Rate & report	Rate & report
Gas content in engine oil - candidate oil, after 20 h, vol.%	-	-	-	-	-	-	-	-	Rate & report	Rate & report
Ratio candidate oil after 5 h / high reference oil after 5 h, max.	-	-	-	-	-	-	-	-	1.2	1.2
Daimler LSPI engine test (Daimler inhouse test) ⁽⁴⁾										
Ratio of Preignition events (candidate oil / reference oil MBRLO10), max.	-	-	-	-	0.5	0.5	0.5	0.5	0.5	0.5
VW TDI (CEC L-79-99)	-	-	-	-	-	-	-	-	-	-
Piston cleanliness, avg., merit, min.	RL 206	RL 206	RL 206	RL 206	RL 206	RL 206	RL 206	RL 206	RL 206	RL 206
All other requirements as listed in ACEA 2012	A5/B5	C4	A3/B4	C3	A3/B4	C3	C3	A5/B5	C2	C5
VW T4 (VW PV 1449)										
All test parameters from VW 502.00	-	-	Yes	-	Yes	-	-	-	-	-
LLR Renault in-house test										
PAI CO at end of test, max.	-	200	-	-	-	-	-	-	-	-
Viscosity increase at 40°C at end of test, %, max.	-	100	-	-	-	-	-	-	-	-
Oil consumption, g/h.	-	Report	-	-	-	-	-	-	-	-
Piston deposits, merit, min.	-	5	-	-	-	-	-	-	-	-
Ring sticking (all rings)	-	No	-	-	-	-	-	-	-	-

MERCEDES-BENZ specifications for passenger car (service fill) V2017.1

- 9 -



Notes:

- (1) Complete test reports for each test have to be submitted. All required data have to be measured, calculated values are not accepted.
- (2) For MB Engine Tests: Rerating at RD/PDI for all related engine parts is required.
- (3) Only for xW-30 or OW-40: Evaluation of bearing wear in a OM 501 LA engine with new crankshaft and premeasured bearings. Rerating by Daimler at TP/PEH.
- (4) The worst result (outlier result) will be replaced by the second worst to calculate the average to control outliers.
- (5) Read Across only according to MB Read Across Guidelines for engine tests (based on the latest ATC and ATIEL Code of Practice). MB Package Pass only for Mineral Oils (SN, ATIEL Grp. I and II) and for SAE 15W-40, 20W-40, 15W-50, 20W-50.
- (6) Corresponding ACEA Sequences or DDC specification level is indicated. Since the performance level of these specifications is different to MB specification they cannot be used alternatively to MB specification.
- (7) Detailed rating for Mack T-12, Cummins ISM and Caterpillar C13 according to API CJ-4 Merit Systems; Mack T-12 Cylinder Liner Wear and Top Ring Weight Loss results obtained as part of an API CK-4 or FA-4 approval program, which includes a passing Volvo T-13 at the API CK-4 or API FA-4 level may be used to satisfy the requirements of the Mack T-12 for MB-Approval 228.31.
- (8) Introduced on 01.11.2018 according to BEAM message from 07/2018.

Conditions for approvals and the use of performance claims (MB sheets) against MB oil specifications

MB requires that any claims for oil performance to meet the mentioned MB specifications, must be based on credible data and controlled tests in accredited test laboratories. All engine performance testing used to support a claim of compliance with these MB oil specifications must be generated according to the MB Read Across Guidelines and the European Engine Lubricants Quality Management System (EELQMS).

An MB Approval for each new oil formulation is valid for 5 years.

The validity period of rebrands and rebLENds is limited by the runtime of the original and therefore limited to max. 5 years.

From the introduction date of a new version of the MB Specification the previous version is still valid one year. During this period of time both specification versions are valid for approvals.

Package Pass approvals: For every treat rate a trading approval is required. The trading approvals are handled like approvals for new oil formulations.

As a consequence the following timeline is valid from now on:

MB Specification - Issue (version with year spec. no.)	First allowable use	New approvals by at the latest
MB Specification V2009.1	16.03.2009	21.03.2013
MB Specification V2012.1	21.03.2012	substituted by MB Specification V2012.2 on 01.10.2012
MB Specification V2012.2	01.10.2012	31.05.2017
MB Specification V2016.1	31.05.2016	31.05.2018
MB Specification V2017.1	01.06.2017	substituted y MB Specification V2019.1 on 15/01.2019
MB Specification V2019.1	15.01.2019	

First allowable use means that approvals and claims cannot be made against the specification before the date indicated.

New approvals by means that from this date all approvals for new oil formulations must be according to the latest MB specification release.

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 1 -



MB Sheet No.(1)	228.2 / 3	228.31	228.5	228.51	228.52	228.61
Mono-/multigrade viscosities	Mono / multi	Multi	Multi	Multi	Multi	Multi
Viscosity grades (SAE J300)	acc. ACEA	acc. ACEA	acc. ACEA	acc. ACEA	acc. ACEA	xW-30
SAE xW-30 and OW-40	Yes ⁽³⁾	Yes ⁽³⁾	Yes ⁽³⁾	Yes ⁽³⁾	Yes ⁽³⁾	Only xW-30 ⁽³⁾
DBL, Read Across guidelines, ACEA, API, DDC						
Related Daimler Liefervorschrift (DBL)	6610	6610	6610	6610	6610	6610
MB read across ⁽⁵⁾	Yes	Yes	Yes	Yes	Yes	Yes
Package pass ⁽⁵⁾	Yes	Yes	No	No	No	No
Corresponding ACEA Oil Sequences level ⁽⁶⁾	E7	E9	E4	E6	E6	F8
ACEA Oil Sequences required	If any ACEA Ax, Bx, Cx, Ex or Fx oil sequence is claimed all tests within this oil sequence are mandatory.					
API Oil Categories required	-	API CJ-4	-	-	-	API FA-4
Corresponding DDC Oil Specification level ⁽⁶⁾	-	93K218	-	-	-	93K223
Laboratory tests						
Sulphated ash (DIN 51575 or ASTM D874A), % m/m, max	> 1.0 & ≤ 2.0	1.0	> 1.0 & ≤ 2.0	1.0	1.0	1.0
TBN (ASTM D2896), fresh oil, mg KOH/g, min.	8.0	7.0	12.0	7.0	7.0	7.0
TBN (ASTM D4739), fresh oil, mg KOH/g	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TAN (ASTM D664), fresh oil, mg KOH/g	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Density at 15°C (DIN 51757), kg/m ³	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Flash point (DIN EN ISO 2592, ASTM D92), °C	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Pour point (ISO 3016 or ASTM D97), °C, max.	R & R / -27	-27	-27	-27	-27	-27
Evaporative loss (Noack) (CEC L-40-93, ASTM 5800), %, max.	13	13	13	12	12	12
Kinematic viscosity (ASTM D445, DIN 51562-1), mm ² /s						
KV at 40°C	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
KV at 100°C	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300
Viscosity at High Temperature and High Shear (CEC L-36-90), mPa.s, min						
HTHS at 100°C	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
HTHS at 150°C	3.5	3.5	3.5	3.5	3.5	≥ 2.9 & ≤ 3.2
Shear stability (CEC L-14-93, ASTM D6278, 30 cycles / ASTM D7109, 90 cycles)	at 30 cycles	at 90 cycles	at 90 cycles	at 90 cycles	at 90 cycles	at 90 cycles
Kin. viscosity at 100°C after 30 / 90 cycles shearing, mm ² /s	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 2 -



MB Sheet No.(1)	228.2 / 3	228.31	228.5	228.51	228.52	228.61
Chemical elements						
Zinc (DIN 51399 -1/2, ASTM D4951, ASTM D5185), % m/m, min.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Sulphur (DIN 51399 -1/2, ASTM D4951, ASTM D5185), % m/m, max.	Rate & report	0.4	Rate & report	0.3	0.3	0.4
Phosphorus (DIN 51399 -1/2, ASTM D4951, ASTM D5185), % m/m, max.	Rate & report	0.12	Rate & report	0.08	0.08	0.12
Chlorine (DIN 51399-2, ASTM D6443), % m/m, max.	Rate & report	Rate & report	Rate & report	0.015	0.015	0.015
Calcium (DIN 51399-1/2, ASTM D4951, ASTM D5185), % m/m, max.	Rate & report	Rate & report	Rate & report	Rate & report	0.15	Rate & report
Magnesium (DIN 51399-1/2, ASTM D4951), % m/m, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Elements B, Ba, Mo, N, Si, % m/m	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Dielectric constant ϵ_r of fresh oil						
Temic oil sensor (DAI) test method at 20°C - 100°C, % m/m	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5	2.0 - 2.5
Daimler oxidation test - fresh oil at 160°C (Daimler oxidation test procedure)						
Kin. viscosity at 100°C, EOT 168 h, avg. of 3 runs, mm ² /s, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oxidation DIN 51453 at EOT 168 h, avg. 3 runs, A/cm, max.	80	80	25	25	25	25
Delta kin. viscosity at 100°C, avg. of 3 runs, absolute, mm ² /s, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Delta kin. viscosity at 100°C, avg. of 3 runs, relative, %, max.	100	100	80	80	80	80
Daimler oxidation test - with fuel dilution 5% B100 at 160°C (FAME from OM 646 Biodiesel test) (Daimler ox. test procedure)						
Kin. viscosity at 100°C, EOT 168 h, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oxidation at EOT 168 h, max. (DIN 51453)	120	120	90	80	80	80
Delta kin. viscosity at 100°C, absolute, mm ² /s, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Delta kin. viscosity at 100°C, relative, %, max.	300	150	130	100	100	100
Oxidation test - with fuel dilution 7% B100 at 150°C (CEC L-109) (FAME from OM 646 Biodiesel test)						
Kin. viscosity at 100°C, EOT 168 h, avg. 2 runs, mm ² /s, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Kin. viscosity at 100°C, EOT 216 h, avg. 2 runs, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report
Oxidation at EOT 168 h, avg. 2 runs, A/cm, max. (DIN 51453)	120	90	90	80	80	80
Oxidation at EOT 216 h, avg. 2 runs, A/cm, max. (DIN 51453)	-	-	Rate & report	Rate & report	Rate & report	Rate & report
Delta kin. viscosity 168 h, avg. of 2 runs, absolute, mm ² /s, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Delta kin. viscosity 168 h, avg. of 2 runs, relative, %, max.	300	150	130	130	130	130
Delta kin. viscosity 216 h, avg. of 2 runs, absolute, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report
Delta kin. viscosity 216 h, avg. of 2 runs, relative, mm ² /s, max.	-	-	Rate & report	Rate & report	Rate & report	Rate & report
CCS (according to SAE J300, fresh oil)						
At SAE J300 fresh oil temperatures, mPa.s, max.	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 3 -



MB Sheet No.(1)	228.2 / 3	228.31	228.5	228.51	228.52	228.61
MRV (according to SAE J300, fresh oil)						
MRV at SAE J300 fresh oil temperature, mPa.s	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300
Yield stress, Pa	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300	Acc. SAE J300
CEC low temperature pumping test (CEC L-105)						
MRV at SAE J300 fresh oil temperature, mPa.s			According to SAE J300 for fresh oil			
Yield stress, Pa	No	No	No	No	No	No
Deposit test (MTU, DIN 51535), mg, min.	Rate & report	Rate & report	130	130	130	130
Sooted oil MRV (T-11/T-11A) (ASTM D6896)						
180 hour sample T-11/T-11A drain MRV, mPa.s, max.	-	18000	-	-	-	25000
Yield stress, Pa, max.	-	35	-	-	-	35
High Temperature Corrosion Bench Test (HTCBT) (modified ASTM D6594 at 135 °C)						
Cu increase, without / with 10% B100*, ppm, max.	20 / 200	20 / 200	20 / 200	20 / 200	20 / 200	20 / 200
Pb increase (only fresh oil), ppm, max.	100	100	100	100	100	100
Copper strip rating, without / with 10% B100*, max.	3 / 4a	3 / 4a	3 / 4a	3 / 4a	3 / 4a	3 / 4a
* Reference fuel B100 (80/20 RME/SME from OM 646 TDG-L-104)						
Foaming tendency (ASTM D892)						
Sequence I (24°C) (ASTM D892 w/o option A), ml, max.	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
Sequence II (94°C) (ASTM D892 w/o option A), ml, max.	20 / 0	20 / 0	20 / 0	20 / 0	20 / 0	20 / 0
Sequence III (24°C) (ASTM D892 w/o option A), ml, max.	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
Sequence IV (150°C) (ASTM D6082 after 1 min settling period), ml	200 / 50	200 / 50	200 / 50	200 / 50	200 / 50	200 / 50
Elastomer compatibility						
ACEA (CEC L-112-x)	ACEA E7	ACEA E9	ACEA E4	ACEA E6	ACEA E6	ACEA F8
API (ASTM D7216)	-	API CJ-4	-	-	-	API FA-4
Infrared spectrum (window material KBr, ZnSe, NaCl, cell thickness 100-125 µm)	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Brand name / Type / Content of						
Base oil acc. ATIEL	Report	Report	Report	Report	Report	Report
Additive package	Report	Report	Report	Report	Report	Report
Any additional additive component (e.g. PPD, VII, anti foam additive)	Report	Report	Report	Report	Report	Report

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 4 -



MB Sheet No.(1)	228.2 / 3	228.31	228.5	228.51	228.52	228.61
Engine tests						
OM 646 DE22LA wear test (CEC L-99-08) ⁽²⁾						
Cam wear inlet / outlet valve (avg. max. wear 8 cams), µm, max.	100 / 130	100 / 130	90 / 110	90 / 110	90 / 110	90 / 110
Cylinder wear (avg. 4 cylinders), µm, max.	5.0	5.0	5.0	5.0	5.0	5.0
Bore polishing (13 mm), value of 4 cylinders, %, max.	3.5	3.5	3.0	3.0	3.0	3.0
Piston cleanliness (avg. 4 pistons), merit, min.	14.0	14.0	16.0	16.0	16.0	16.0
Engine sludge avg., merit, min.	8.8	8.8	9.1	9.1	9.1	9.1
Ring sticking	No	No	No	No	No	No
Tappet wear inlet (avg. wear 8 cams), µm	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Tappet wear outlet (avg. wear 8 cams), µm	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Bearing wear main / con rod bearing, µm, max. ⁽⁴⁾	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1
Piston ring wear axial ring 1 / 2 / 3, µm, max. ⁽⁴⁾	10.4 / 6.0 / 5.0	10.4 / 6.0 / 5.0	8.7 / 4.0 / 3.0	8.7 / 4.0 / 3.0	8.7 / 4.0 / 3.0	8.7 / 4.0 / 3.0
Piston ring wear radial ring 1 / 2 / 3, µm, max. ⁽⁴⁾	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0
Timing chain wear (elongation), %, max.	0.4	0.4	0.4	0.4	0.4	0.4
Oil consumption, g/test, max.	7000	7000	7000	7000	7000	7000
Soot, %, max.	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0	3.0 - 6.0
Viscosity increase at 100°C, %, max.	100	100	90	90	90	90
OM 646 DE22LA biodiesel test (CEC L-104) (when ready) ⁽²⁾						
Piston cleanliness, avg. 4 pistons, merit, min.	Rate & report	20.0	25.0	25.0	25.0	25.0
Engine sludge, avg., merit, min.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Ring sticking	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TBN at EoT (ASTM D4739), mg KOH/g, min.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TAN at EoT (ASTM D664), mg/KOH/g, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oil consumption, g/test, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Soot, %, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Viscosity increase at 100°C, %, max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 5 -



MB Sheet No.(1)	228.2 / 3	228.31	228.5	228.51	228.52	228.61
OM 501 LA Euro 5 (CEC L-101-09) ^{(2), (3)}						
Piston cleanliness, avg., merit, min.	20.0	20.0	30.0	30.0	30.0	30.0
Ring sticking, 2 nd rings, ASF, max.	1.0	1.0	1.0	1.0	1.0	1.0
Engine sludge, avg., merit, min.	9.0	9.0	9.4	9.4	9.4	9.4
General engine deposits, avg., demerit, max.	2.0	2.0	2.0	2.0	2.0	2.0
Wear rating (visual), avg., demerit, max.	3.0	3.0	2.0	2.0	2.0	2.0
Bore polishing, avg., %, max.	2.0	2.0	1.0	1.0	1.0	1.0
Cylinder wear, avg., mm, max.	0.008	0.008	0.008	0.008	0.008	0.008
Turbocharger deposits, demerit, max.	2.0	2.0	2.0	2.0	2.0	2.0
Specific oil consumption, g/h, max.	30.0	30.0	30.0	30.0	30.0	30.0
TBN at EoT, mg KOH/g (ASTM D4739)	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TAN at EoT, mg KOH/g (ASTM D664)	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Daimler OM 471.999 (Daimler inhouse test, 400 h) (when ready as alternative to OM 501)						
Piston cleanliness, avg., %, min.	70	70	75	75	75	75
Ring sticking, 2 nd rings, %, min.	70	70	75	75	75	75
Engine sludge, avg., %, min.	70	70	75	75	75	75
General engine deposits, avg., %, min.	70	70	75	75	75	75
Wear rating (visual), avg., %, min.	70	70	75	75	75	75
Bore polishing, avg., %, min.	70	70	75	75	75	75
Cylinder wear, avg., %, min.	70	70	75	75	75	75
Turbocharger deposits, %, min.	70	70	75	75	75	75
Ease of movement of turbocharger (Freigängigkeit), %, min.	70	70	75	75	75	75
Specific oil consumption, g/h, max.	25	25	25	25	25	25
Kinematic viscosity at 40°C EoT (ASTM D445, DIN 51562-1), mm ² /s	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Oxidation at EoT, A/cm (IR)	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Nitration at EoT, A/cm (IR)	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TBN at EoT (ASTM D4739), mg KOG/g	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
TAN at EoT (ASTM D664), mg KOH/g	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
OM 501 LA Euro 5 fuel economy test (Daimler inhouse test, WHTC, FE vs. MB RL003 or RL012, 10W-40 ⁽²⁾)						
FE benefit vs. MB RL003, only required for xW-30, %, min.	0.3	0.3	0.6	0.6	0.6	0.8
FE benefit vs. MB RL013, only required for xW-30, %, min.	0.5	0.5	0.8	0.8	0.8	1.0

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 6 -



MB Sheet No.(1)	228.2 / 3	228.31	228.5	228.51	228.52	228.61
DD13 scuffing test						
Hours-to-Scuff, min	-	31	31	31	31	31
Change in mass fraction of Fe at Hours-to-Scuff, mg/kg	-	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
Mack T-11 (ASTM D7156)						
TGA soot at 4.0 mm ² /s increase at 100°C, %, min.	-	3.5 / 3.4 / 3.3	-	-	-	3.5 / 3.4 / 3.3
TGA soot at 12.0 mm ² /s increase at 100°C, %, min.	-	6.0 / 5.9 / 5.9	-	-	-	6.0 / 5.9 / 5.9
TGA soot at 15.0 mm ² /s increase at 100°C, %, min.	-	6.7 / 6.6 / 6.5	-	-	-	6.7 / 6.6 / 6.5
Mack T-12 EGR (ASTM D7422) ⁽⁷⁾						
Mack merit rating, min.	-	1000	-	-	-	-
Mack T-12 EGR (ASTM D7422)						
Top ring mass loss, mg, max.	-	-	-	-	-	105 / 105 / 105
Cylinder liner wear, µm, max.	-	-	-	-	-	24.0 / 24.0 / 24.0
Volvo T-13 oxidation test (ASTM D8048)						
IR peak at EoT, abs, A/cm, max.	-	-	-	125 / 130 / 133	125 / 130 / 133	125 / 130 / 133
Kinematic viscosity increase at 40°C EoT, relative, %, max.	-	-	-	75 / 85 / 90	75 / 85 / 90	75 / 85 / 90
Average oil consumption, 48 h to 192 h, g/h, max.	-	-	-	Report	Report	Report
Cummins ISM EGR (ASTM D7468) ⁽⁷⁾						
Cummins merit rating, min.	-	1000	-	-	-	1000
Top ring weight loss, mg, max.	-	100 / 100 / 100	-	-	-	100 / 100 / 100
Cummins ISB EGR (ASTM D7484)						
Slider tappet weight loss, avg., mg, max.	-	100 / 108 / 112	-	-	-	100 / 108 / 112
Cam lobe wear, µm, max. 55	-	55 / 59 / 61	-	-	-	55 / 59 / 61
Crosshead weight loss, mg	-	Rate & report	-	-	-	Rate & report
Caterpillar C13 (ASTM D7549) ⁽⁷⁾						
CAT merit rating, min.	-	1000	-	-	-	1000 / 1000 / 1000
Hot-stuck piston ring	-	None	-	-	-	-

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 7 -



MB Sheet No.(1)	228.2 / 3	228.31	228.5	228.51	228.52	228.61
Caterpillar 1N (ASTM D6750)	-	-	-	-	-	-
Weighted demerits, max.	-	286.2 / 311.7 / 323.0	-	-	-	286.2 / 311.7 / 323.0
Top groove fill, %, max.	-	20 / 23 / 25	-	-	-	20 / 23 / 25
Top land heavy carbon, %, max.	-	3 / 4 / 5	-	-	-	3 / 4 / 5
Oil consumption (0-252 h), g/kWh, max.	-	0.5	-	-	-	0.54 / 0.54 / 0.54
Oil consumption (0-252 h), g/MJ, max.	-	-	-	-	-	0.15 / 0.15 / 0.15
Piston / ring / liner scuffing	-	None	-	-	-	None
Piston ring sticking	-	None	-	-	-	None
Roller followerwear test (ASTM D5596)	-	-	-	-	-	-
Pin wear, avg., mils, max.	-	0.30/0.33/0.36	-	-	-	0.30/0.33/0.36
or µm, max.	-	7.6/8.4/9.1	-	-	-	7.6/8.4/9.1
Engine oil aeration test (ASTM D6894)	-	-	-	-	-	-
Oil aeration volume (MTAC), %, max.	-	8.0	-	-	-	-
Caterpillar C13 COAT (ASTM D8047)	-	-	-	-	-	-
Average aeration, 40 h to 50 h, %, max.	-	-	-	11.8/11.8/11.8	11.8/11.8/11.8	11.8/11.8/11.8

Notes:

(1) Complete test reports for each test have to be submitted. All required data have to be measured, calculated values are not accepted.

(2) For MB Engine Tests: Rerating at RD/PDI for all related engine parts is required.

(3) Only for xW-30 or 0W-40: Evaluation of bearing wear in a OM 501 LA engine with new crankshaft and premeasured bearings. Rerating by Daimler at TP/PEH

(4) The worst result (outlier result) will be replaced by the second worst to calculate the average to control outliers.

(5) Read Across only according to MB Read Across Guidelines for engine tests (based on the latest ATC and ATIEL Code of Practice). MB Package Pass only for Mineral Oils (SN, ATIEL Grp. I and II) and for SAE 15W-40, 20W-40, 15W-50, 20W-50; for 228.31 additionally: Base Oils (SN, ATIEL Grp. II & III <30%) and only for SAE 10W-30.

(6) Corresponding ACEA Sequences or DDC specification level is indicated. Since the performance level of these specifications is different to MB specification they cannot be used alternatively to MB specification.

(7) Detailed rating for Mack T-12, Cummins ISM and Caterpillar C13 according to API CJ-4 Merit Systems; Mack T-12 Cylinder Liner Wear and Top Ring Weight Loss results obtained as part of an API CK-4 or FA-4 approval program, which includes a passing Volvo T-13 at the API CK-4 or API FA-4 level may be used to satisfy the requirements of the Mack T-12 for MB-Approval 228.31.

MERCEDES-BENZ specifications for heavy duty (service fill) V2017.1

- 8 -



Conditions for approvals and the use of performance claims (MB sheets) against MB oil specifications

MB requires that any claims for oil performance to meet the mentioned MB specifications, must be based on credible data and controlled tests in accredited test laboratories.

All engine performance testing used to support a claim of compliance with these MB oil specifications must be generated according to the MB Read Across Guidelines and the European Engine Lubricants Quality Management System (EELQMS).

An MB Approval for each new oil formulation is valid for 5 years.

The validity period of rebrands and rebLENds is limited by the runtime of the original and therefore limited to max. 5 years.

From the introduction date of a new version of the MB Specification the previous version is still valid one year. During this period of time both specification versions are valid for approvals.

Package Pass approvals: For every treat rate a trading approval is required. The trading approvals are handled like approvals for new oil formulations.

MB Specification - Issue (version with year spec. no.)	First allowable use	New approvals by at the latest
MB Specification V2009.1	16.03.2009	21.03.2013
MB Specification V2012.1	21.03.2012	substituted by MB Specification V2012.2 on 01.10.2012
MB Specification V2012.2	01.10.2012	31.05.2017
MB Specification V2016.1	31.05.2016	31.05.2018
MB Specification V2017.1	01.06.2017	substituted by MB Specification V2019.1 on 15.01.2019
MB Specification V2019.1	15.01.2019	

First allowable use means that approvals and claims cannot be made against the specification before the date indicated.

New approvals by means that from this date all approvals for new oil formulations must be according to the latest MB specification release.

MTU diesel engine oil specifications - MTL5044

- 1 -



- Oil category 1: Normal quality (generally corresponds to API-CF, CG-4, CH-4, or ACEA E2-96).
- Oil category 2: Higher quality level (corresponds to SHPD = Super High Performance Diesel, or ACEA E7-08).
- Oil category 2.1: Higher quality with low ash-forming additive content (low SAPS) (API CJ-4, ACEA E9-08).
- Oil category 3: High performance diesel engine oil (quality level above ACEA E4-08).
- Oil category 3.1: High performance diesel engine oil with low ash-forming additive content (low SAPS) (ACEA E6-08).

Oil category	-	-	1, 2, 2.1, 3		3.1
Viscosity grades (SAE J300)	30	40	5W-30, 10W-30	5W-40, 10W-40, 15W-40	5W-30, 10W-40
Laboratory tests					
Density at 15°C (DIN51757, ASTM D1298), g/ml	Report		Report		
Viscosity at 40°C (DIN 51562-1, ASTM D445), mm²/s	Report	Report	Report	Report	Report
at 100°C	9.3 - 12.5	12.5 - 16.3	9.3 - 12.5	12.5 - 16.3	12.5 - 16.3
HTHS viscosity (CEC L-036-90), mPa.s, min.	-		3.5		
Shear stability (DIN 51382, CEC L-014-93, ASTM D6278, D7109)	-		Oil cat. 1, 2: Stay in grade		
Viscosity after 30 cycles shear (DIN 51562-1, ASTM D445), mm²/s	-		Oil cat. 2.1, 3, 3.1: Stay in grade		
Viscosity after 90 cycles shear (DIN 51562-1, ASTM D445), mm²/s	-				
Viscosity index (VI) (DIN ISO 2209, ASTM D2270)	Report		Report		
Pour point (DIN ISO 3016, ASTM D97), °C	Report		Report		
Flash point					
COC (DIN EN ISO 2592, ASTM D92), °C, min.	215		215		
PM (DIN EN ISO 2719), °C	Report		Report		
Evaporative loss (Noack) (DIN 51581, CEC L-040-93), %, max.	10		13		12
TBN (ISO 3771, ASTM D2896), mg KOH/g, min.	8.0		Oil cat. 1, 2: 8.0 Oil cat 2.1: 7.0 Oil cat. 3: 12.0		7.0
TAN (ASTM D664), mg KOH/g	Report		Report		
Sulfated ash (DIN 51575, ASTM D874), % m/m, max.	1.0 - 2.0		Oil cat. 1, 2, 3: 1.0 - 2.0 Oil cat. 2.1: 1.0		1
Mg, Ca, Bo, Mo, Na, K (DIN 51391-3)	Report		Report		

MTU diesel engine oil specifications - MTL5044

- 2 -



Oil category	-	-	1, 2, 2.1, 3	3.1
Viscosity grades (SAE J300)	30	40	5W-30, 10W-30, 5W-40, 10W-40, 15W-40	5W-30, 10W-40
Chlorine (DIN 15597), mg/kg, max.	150		150	
Phosphorus (DIN 51363-2/-3), % m/m, max.	Report		Oil cat. 1, 2, 3: Report Oil cat. 2.1: 0.12	0.08
Sulfur (DIN 51400-1, DIN EN ISO 14596), % m/m, max.	Report		Oil cat. 1, 2, 3: Report Oil cat. 2.1: 0.4	0.3
Zinc (DIN 51391-3), % m/m, min.	0.035		0.035	
Nitrogen (ASTM D3228, D5762), % m/m	Report		Report	
Further additive elements >0.01 % m/m	Report		Report	
Elastomer compatibility (DIN 53521), SRE NBR 28, FPM AK6 ⁽¹⁾	Pass		Pass	
FZG gear rig (DIN 51354-2, CEC L-07-A-95), damage force stage, min.	11		11	
Foaming tendency (ASTM D6082), ml, max.	200 - 50		200 - 50	
Turbocharger deposits (MTV 5040) (DIN 51535), mg, max.	-		120	
PDSC oxidation test (CEC L-85-99), min	Report		Report	

MTU diesel engine oil specifications - MTL5044

- 3 -



Oil category	1	2. 2.1	3. 3.1
Laboratory tests			
OM 441 LA (CEC L-52-T-97)			
Bore polishing, average, %, max.	3.0	-	-
Piston cleanliness, average, merit, min.	22	-	-
Cylinder wear, average, μm , max.	8.0	-	-
Engine sludge, average, merit, min.	9.0	-	-
Specific oil consumption, g/h, max.	100	-	-
Viscosity increase at 40°C, %, max.	-	-	-
Wear rating, demerit, max.	2.5	-	-
General engine deposits, demerit, max.	3.0	-	-
Oil drain interval, h	200	-	-
OM 501 LA (CEC L-101-09)			
Piston cleanliness, average, merit, min.	16.0	19.0	28.0
Ring sticking piston ring 2, ASF, max.	1.0	1.0	1.0
Engine sludge, average, merit, min.	9.0	9.0	9.4
General engine deposits, average, demerit, max.	3.0	2.0	2.0
Wear rating, average, demerit, max.	3.0	3.0	2.0
Bore polishing, average, %, max.	3.0	2.0	1.0
Cylinder wear, average, μm , max.	8	8	8
Turbocharger deposits, demerit, max.	3.0	2.0	2.0
TBN (ASTM D4739) at end of test, mg KOH/g	Report	Report	Report
TAN (ASTM D664) at end of test, mg KOH/g	Report	Report	Report
Oil consumption, g/h, max.	50.0	30.0	30.0
OM 611 (Mercedes-Benz 300 h test)			
Bore polishing, max. value of 4 cylinders	4.0	-	-
Piston cleanliness, average, merit, min.	23	-	-
Cylinder wear, average, μm , max.	7.0	-	-
Cam wear inlet / outlet valve, average, μm , max.	140 / 155	-	-
Engine sludge, average, merit, min.	8.0	-	-
Oil consumption, g/test, max.	6000	-	-
Viscosity increase at 40°C, %, max.	100	-	-

MTU diesel engine oil specifications - MTL5044

- 4 -



Oil category	1	2. 2.1	3. 3.1
OM 646 DE22LA (CEC L-099-08)			
Cam wear inlet / outlet valve, average, μm , max.	120 / 155	100 / 130	90 / 110
Cylinder wear, average, μm , max.	5	5	5
Bore polishing (13 mm), max. value of 4 cylinders	4.0	3.5	3.0
Piston cleanliness, average, merit, min.	10.0	12.0	14.0
Engine sludge, average, merit, min.	8.6	8.8	9.1
Ring sticking, yes/no	No	No	No
Tappet wear inlet / outlet, average, μm , max.	Rate & report	Rate & report	Rate & report
Bearing wear main / con rod bearing, μm , max.	2.1 / 2.1	2.1 / 2.1	2.1 / 2.1
Piston ring wear axial at ring 1 / ring 2 / ring 3, μm , max.	10.4 / 6.0 / 5.0	10.4 / 6.0 / 5.0	8.7 / 4.0 / 3.0
Piston ring wear radial at ring 1 / ring 2 / ring 3, μm , max.	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0	10.0 / 12.0 / 8.0
Timing chain wear (elongation), %, max.	0.4	0.4	0.4
Oil consumption, g/test, max.	7000	7000	7000
Soot, %, max.	4.0 - 7.0	4.0 - 7.0	4.0 - 7.0
Viscosity increase at 100°C, %, max.	100	100	90
Mack T-8E (ASTM D5967) (Not for oil category 2.1) Run number	1 / 2 / 3	1 / 2 / 3	1 / 2 / 3
Relative viscosity at 100°C at 4.8% soot, max.	-	2.1 / 2.2 / 2.3	2.1 / 2.2 / 2.3
Mack T-11 (ASTM D7156) (Oil category 2.1) Run number		1 / 2 / 3	
TGA soot at 4.0 mm ² /s increase at 100°C, %, min.	-	3.5 / 3.4 / 3.3	-
TGA soot at 12.0 mm ² /s increase at 100°C, %, min.	-	6.0 / 5.9 / 5.9	-
TGA soot at 15.0 mm ² /s increase at 100°C, %, min.	-	6.7 / 6.6 / 6.5	-

Notes:

(1) Please refer to chapter "Elastomer Compatibility" for limits.

PACCAR DAF engine oil requirements and oil drain intervals



Engine	Engine Oil Recommendation	Oil Drain Interval
Euro V / EEV		
Paccar PR	ACEA E6, xW-40	Standard drain: 75000 km Extended drain ⁽¹⁾ : 100000 km
Paccar MX	ACEA E6, E9, xW-30, xW-40	Standard drain: 90000 km Extended drain ⁽¹⁾ : 150000 km only with ACEA E6
Euro VI		
Paccar PX-4, PX-5, PX-7	ACEA E9 + CES 20081, 10W-30	Standard drain: 60000 km
Paccar MX-11 (MY2013-2016)	ACEA E6, E9, xW-30, xW-40	Standard drain: 75000 km Extended drain ⁽¹⁾ : 150000 km with ACEA E6
Paccar MX-11 (MY2017)	ACEA E6, E9, xW-30, xW-40	Standard drain: 100000 km Extended drain ⁽¹⁾ : 150000 km with ACEA E6
Paccar MX-13 (MY2013-2016)	ACEA E6, E9, xW-30, xW-40	Standard drain: 90000 km Extended drain ⁽¹⁾ : 180000 km with ACEA E6
Paccar MX-13 (MY2017)	ACEA E6, E9, xW-30, xW-40	Standard drain: 100000 km Extended drain ⁽¹⁾ : 200000 km with ACEA E6
EPA 2010		
Paccar MX-11 ⁽⁷⁾ , MX-13 ⁽²⁾ (MY2013-2016)	API CJ-4, CK-4, xW-30, xW-40	Severe duty, Vocational ⁽³⁾ : 30.000 miles Normal duty, Long haul ⁽⁴⁾ : 40.000 / 60.000 ⁽⁵⁾ miles
Paccar MX-11, MX-13 ⁽²⁾ (MY2017)	API CJ-4, CK-4, xW-30, xW-40	Severe duty, Vocational ⁽³⁾ : 30.000 miles Long haul ⁽⁴⁾ : 50.000 ⁽⁵⁾ / 75.000 ⁽⁶⁾ miles

Notes:

- (1) DAF Service Rapido system: double fuel filter and centrifugal oil filter; MX-13 engine has 6 L larger sump.
 (2) Standard with extended oil drain package.
 (3) Fuel consumption: <2.5 km/L (<6 MPG); Gross vehicle weight: >36.300 kg (>80.000 lb).
 (4) Fuel consumption: >2.5 km/L (>6 MPG); Gross vehicle weight: <36.300 kg (<80.000 lb).
 (5) Only if idle time is <20%.
 (6) Only for MY2017 MX-11 and MX-13 engines, used oil analysis program recommended for extended ODI's greater than 60.000 miles.
 (7) MX-11 engine available as from 2015.

PORSCHE engine oil requirements



Specifications	Porsche A40	Porsche C40	Porsche C30	Porsche C20
Performance requirements:				
HTHS (CEC L-36-A-90), mPa.s, min.	3.5	3.5	3.5	2.6
ACEA level	A3/B3 ⁻¹⁶ , A3/B4 ⁻¹⁶	C3 ⁻¹⁶	C3 ⁻¹⁶	C5 ⁻¹⁶
Volkswagen approval	-	-	VW 504.00 / 507.00	VW 508.00 / 509.00
VW T4 (PV 1449)			Included in VW Specification	Included in VW Specification
Viscosity at 40°C at end of test, mm ² /s, max.	200 +/- test stand severity	200 +/- test stand severity		
Viscosity increase at 40°C, %, max.	130 +/- test stand severity	130 +/- test stand severity		
TBN end of test, DIN 51639-1, mg KOH/g, min.	Ref Oil of test stand +1 (typical =4)	≥ 5 mg(KOH)/g + TBN Fresh Oil × Std Dev		
TAN increase end of test, TAN points, max.	4	4		
Piston merit, 5 parts, min.	1.0	1.0		
Ring sticking, ASF, max.	none	none		
VW Fuel economy (PV 1496 Audi EA888)				
FE vs. RL 5W-30, %, min.	-	0.0	Included in VW Specification	Included in VW Specification
Porsche durability (9A1, 3.6L, 360 kW B6 engine, 163.7 h cycling test):	Pass	Pass	-	-
Sludge rating, merit, min.	9.5	9.5	-	-
Turbo deposits, merit, min.	6.0	6.0	-	-
Turbo feed pipe deposits, merit, min.	7.4	7.4	-	-
Turbo charger sealing ring sticking	none	none	-	-
Piston ring groove fill % max. (Porsche method)	100	100	-	-
Piston ring sticking	none	none	-	-
Cylinder liner wear: washboard	none	none	-	-
Cam wear, µm, average, max.	8 -10	8 -10	-	-
Cam wear, µm, max.	9 - 12	9 - 12	-	-
Tappet wear, µm, average	3 - 10	3 - 10	-	-
Tappet wear, µm, max.	5 - 13	5 - 13	-	-
Thrust curve	as Ref. Oil or better	as Ref. Oil or better	-	-
VW W12 TSI PZD (PV xxxx)		Pass		
HPDSC (CEC L-85-99 / ASTM D6186)				
Porsche profile run at 210°C	Rate & Report	Rate & Report	Rate & Report	Rate & Report
Oxidation stability (CEC L-109)				
With Porsche poor fuel specification (POSK)	Rate & Report	Rate & Report	Rate & Report	Rate & Report
With NMA (N-Methyl Aniline)	Rate & Report	Rate & Report	Rate & Report	Rate & Report

PSA-PEUGEOT-CITROEN engine oil specifications

- 1 -



Specifications	B71 2300	B71 2296	B71 2290	B71 2297	B71 2302	B71 2312	B71 2010
Expiration date	02-mai-22	10-oct-22	23-juil-22	11-oct-22	30-août-22	30-sept-22	18-sept-22
Application	Service fill engine oil ACEA A3/B4. Applicable worldwide	Service fill and first fill engine oil ACEA A3/B4. ⁽²⁾ Applicable worldwide	Service fill engine oil ACEA Cx, except C5 Applicable in Europe only	Service fill gasoline engine oil ACEA Cx, except C5. Applicable in warm countries	Factory- and service fill gasoline engine oil ACEA C2 or C3. Applicable outside Europe (Brazil & China)	Service fill engine oil ACEA C2 or C3. Applicable in Europe only	Service fill engine oil ACEA C5. Applicable in Europe only
Fuel type	Gasoline & Diesel	Gasoline & Diesel	Gasoline & Diesel	Gasoline & Diesel	Gasoline & Diesel	Gasoline & Diesel	Gasoline & Diesel
Allowed SAE Viscosity grade(s)	10W-40	5W-40	5W-30	5W-30 (restricted)	0W-30	0W-30	0W-20
ACEA basis ⁽¹⁾	A3/B4 ⁻¹²	A3/B4 ⁻¹²	Cx ⁻¹⁶ except C5 ⁻¹⁶	Cx ⁻¹⁶ except C5 ⁻¹⁶	C2 ⁻¹² or C3 ⁻¹²	C2 ⁻¹⁶ or C3 ⁻¹⁶	C5 ⁻¹⁶
Physical characteristics							
Kinematic viscosity (ISO 3104 or ASTM D445)							
at 100°C (KV100), mm²/s	Within SAE J300 grade above	Within SAE J300 grade above (target: 12.5)	Within SAE J300 grade above	≥ 11	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above
at 40°C (KV40), mm²/s	Report	Report	Report	≥ 65	Report	Report	Report
Viscosity index (ISO 2909 or ASTM STP43C)	Report	Report	Report	Report	Report	Report	Report
Shear stability after 30 cycles (CEC L-14-A-93 or ASTM D6278)							
at 100°C (KV100), mm²/s	Stay in grade	Stay in grade	Stay in grade	-0.7 mm²/s max compared to KV100	Stay in grade	Stay in grade	Stay in grade
at 40°C (KV40), mm²/s	Report	Report	Report	Report	Report	Report	Report
Low temperature viscosity (CCS) (ASTM D5293), cP	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above
Pumpability limit temperature (MRV) (ASTM D4684), cP	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above
Dynamic viscosity HTHS (CEC L-39-A-90 or ASTM D4683), cP	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above	≥ 3.2	Within SAE J300 grade above	Within SAE J300 grade above	Within SAE J300 grade above
Density at 15°C (ISO 12185 or ASTM D4052), kg/m³	Report	Report	Report	Report	Report	Report	Report
Flash point (ISO 2592 or ASTM D92), °C, min.	≥ 210	≥ 210	≥ 210	≥ 210	≥ 210	≥ 210	≥ 210
Pour point (ISO 3016 or ASTM D97), °C	Report	≤ -35	≤ -35	≤ -35	≤ -35	≤ -35	≤ -35
Aeration / Air release at 40°C & 80°C (ISO 9120 mod. or ASTM D3427), min.	Superior or equivalent performance to reference oil; provide curves	30 max at 40°C 4 max at 80°C ; provide curves	30 max at 40°C 4 max at 80°C ; provide curves	15 max at 40°C 4 max at 80°C ; provide curves	30 max at 40°C 4 max at 80°C ; provide curves	30 max at 40°C 4 max at 80°C ; provide curves	30 max at 40°C 4 max at 80°C ; provide curves

PSA-PEUGEOT-CITROEN engine oil specifications

- 2 -



Specifications	B71 2300	B71 2296	B71 2290	B71 2297	B71 2302	B71 2312	B71 2010
Foaming tendency and stability							
at 24°C (ISO 6247 or ASTM D892), ml / ml	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
at 93°C (ISO 6247 or ASTM D892), ml / ml	50 / 0	50 / 0	50 / 0	50 / 0	50 / 0	50 / 0	50 / 0
at 24°C after 93°C (ISO 6247 or ASTM D892), ml / ml	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0	10 / 0
at 150°C, (ASTM D6082), ml / ml	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0
High temperature volatility (Noack) (CEC L-40-A-93 or ASTM D5800), wt%	≤ 13	≤ 13	≤ 13	≤ 9	≤ 13	≤ 13	≥ 13
Chemical characteristics							
Total acid number (TAN) (ISO 6619 or ASTM D664), mgKOH/g	Report	Report	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0
Total base number (TBN), mgKOH/g							
ISO 3771 or ASTM D2896, min.	≥ 10.0	≥ 10.0	≥ 6.0	≥ 6.0	≥ 6.0	≥ 6.0	≥ 6.0
ASTM D4739	Report	Report	Report	Report	Report	Report	Report
Infrared spectrum	Report	Report	Report	Report	Report	Report	Report
HPDSC (CEC L-85-99) on used oil of ATO test							
Oxidation induction time (OIT) at 72, 96, 120, 144h	Report	Report	Report	Report	Report	Report	Report
Onset ignition temperature, at 72, 96, 120h	Report	Report	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA
Onset ignition temperature, at 144h	Report	Report	≥ 205	≥ 205	≥ 205	≥ 205	≥ 205
Steel corrosion							
in presence of water (ASTM D665-A)	-	-	Light rusting	Light rusting	Light rusting	Light rusting	Light rusting
in presence of salted water (PSA D53 5207 or ASTM D665-B)			2; light rusting	2; light rusting	2; light rusting	2; light rusting	2; light rusting
Copper corrosion (ISO 2160 or ASTM D130)			Report	Report	Report	Report	Report

PSA-PEUGEOT-CITROEN engine oil specifications

- 3 -



Specifications	B71 2300	B71 2296	B71 2290	B71 2297	B71 2302	B71 2312	B71 2010
Elementary analysis (ASTM D5185 or ASTM D6443)							
Sulphur (S) content, ppm	According to ACEA level above	According to ACEA level above	≤ 3000	≤ 3000	≤ 3000	≤ 3000	≤ 3000
Phosphorus (P) content, ppm	According to ACEA level above	≤ 1000	≤ 800	≤ 800	≤ 800	≤ 800	≤ 800
Lithium (Li, Lead (Pb), Sodium (Na) and Potassium (K) global content, ppm	≤ 25	≤ 25	≤ 25	≤ 25	≤ 25	≤ 25	≤ 25
Other elements (Ca, Mg, Zn, B, Mo, Si, Ba, N ...) content, ppm	Report	Report	Report	Report	Report	Report	Report
Chlorine (Cl) content, ppm	Report	Report	≤ 25	≤ 25	≤ 25	≤ 25	≤ 25
Nitrogen (N) content, ppm	-	-	Report	Report	Report	Report	Report
Calcium (Ca) content, ppm	-	-	≤ 1700	≤ 1400	≤ 1400	≤ 1400	≤ 1400
Calcium (Ca) & magnesium (Mg) global content, ppm	-	-	≤ 1700	≤ 1700	≤ 1700	≤ 1700	≤ 1700
Sulphated ash content (ISO 3987 or ASTM D874), % m/m	≥ 1.0 & ≤ 1.6	≥ 1.0 & ≤ 1.6	≤ 0.8	≤ 0.8	≤ 0.8	≤ 0.8	≤ 0.8
Laboratory mechanical tests							
4-Ball machine - wear test (ISO 20623)							
Average imprint diameter at 40kg, 60min, 1500rpm, mm	≤ 0.50	≤ 0.50	≤ 0.50	≤ 0.50	≤ 0.50	≤ 0.50	≤ 0.50
4-Ball machine - extreme pressure test (ISO 20623)							
Seizure load, kg	≥ 100 (target)	≥ 100 (target)	≥ 100 (target)	≥ 100 (target)	≥ 100 (target)	≥ 100 (target)	≥ 100
Imprint diameter at 100kg, mm	≤ 0.55	≤ 0.55	≤ 0.55	≤ 0.55	≤ 0.55	≤ 0.55	≤ 0.55
PSA specific laboratory tests							
Resistance to water (D57 5046)	No gelation	No gelation	No gelation	No gelation	No gelation	No gelation	No gelation
PCT Coking test at 288°C (GFC Lu-29-T-97 v.5), merit	≥ 8.0	≥ 8.0	≥ 8.0	≥ 8.0	≥ 8.0	≥ 8.0	≥ 8.0
PCT Coking test at 305°C (PSA SOP 01563_10_00802), merit	Report	Report	Report; Target = 8.0	Report; Target = 8.0	Report	Report; Target = 8.0	Report

PSA-PEUGEOT-CITROEN engine oil specifications

- 4 -



Specifications	B71 2300	B71 2296	B71 2290	B71 2297	B71 2302	B71 2312	B71 2010
TOC Oxidation stability at 170°C (ATO3) (PSA SOP 01563_1I_00047)	test duration = 120h	test duration = 144h	test duration = 144h	test duration = 144h	test duration = 144h	test duration = 144h	test duration = 144h
KV100 at 0, 72, 96, 120h & 144h, mm ² /s	Report	Report	Report	Report	Report	Report	Report
RKV (relative KV100 change compared to fresh oil) at 72 & 96h, %	≥ -20 (target) and ≤ +20	-	-	-	-	-	-
RKV (relative KV100 change compared to fresh oil) at 72, 96 & 120h, %	-	≥ -20 (target) and ≤ +20	≥ -20 (target) and ≤ +20	≥ -20 (target) and ≤ +20	≥ -20 (target) and ≤ +20	≥ -20 (target) and ≤ +20	≥ -20 (target) and ≤ +20
RKV at end of test (compared to fresh oil), %	≤ +200	≤ +200	≤ +200	≤ +200	≤ +200	≤ +200	≤ +200
(RKV at 120h - RKV at 96h) / 24, %/h	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5
(RKV at 144h - RKV at 120h) / 24, %/h	-	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5
PAI at 72, 96 & 120h	Report	Report	Report	Report	Report	Report	Report
Insoluble content at 120h, wt%	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
TOC Oxidation stability with 8% added E10 (ATOE3) (Ethanol fuel)	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min
TOC Oxidation stability with 1% added EHN1 (Nitration)	Pass same limits as standard TOC test	Pass same limits as standard TOC test	Pass same limits as standard TOC test	Pass same limits as standard TOC test	Pass same limits as standard TOC test	Pass same limits as standard TOC test	Pass same limits as standard TOC test
TOC Oxidation stability with 8% added E22 (Brasil ethanol fuel)	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min
TOC Oxidation stability with 8% added E10S (China ethanol fuel)	-	-	-	-	-	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	-
TOC Oxidation stability with 5% added BVRP2 (Malaysia gasoline)	-	-	-	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	-	-
TOC Oxidation stability with 8% added M15 (China methanol fuel)	-	-	-	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	-	-
TOC Oxidation stability with 8% added E100 (Brasil ethanol fuel)	-	-	-	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	Same limits as standard TOC test PCT at 288°C: merit 7.0 min	-

PSA-PEUGEOT-CITROEN engine oil specifications

- 5 -



Specifications	B71 2300	B71 2296	B71 2290	B71 2297	B71 2302	B71 2312	B71 2010
TOC Oxidation stability with 10% added B10 (ATOBS) (B10LUB)	test duration = 120h	test duration = 144h	test duration = 144h	test duration = 144h	test duration = 144h	test duration = 144h	test duration = 144h
KV100 at 0, 72, 96, 120h & 144h, mm ² /s	Report	Report	Report	Report	Report	Report	Report
RKV (relative KV100 change compared to fresh oil) at 72, 96 & 120h, %	≥ -30 (target) and ≤ +20	-	-	-	-	-	-
RKV (relative KV100 change compared to fresh oil) at 72, 96 & 120h, %	-	≥ -30 (target) and ≤ +20	≥ -30 (target) and ≤ +20	≥ -30 (target) and ≤ +20	≥ -30 (target) and ≤ +20	≥ -30 (target) and ≤ +20	≥ -30 (target) and ≤ +20
RKV at end of test (compared to fresh oil), %	≤ +200	≤ +200	≤ +200	≤ +200	≤ +200	≤ +200	≤ +200
(RKV at 120h - RKV at 96h) / 24, %/h	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5
(RKV at 144h - RKV at 120h) / 24, %/h	-	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5
PAI at 72, 96 & 120h	Report	Report	Report	Report	Report	Report	Report
Insoluble content at 120h, wt%	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Compatibility with elastomers							
Compatibility with ACEA elastomers (CEC L-112-16) ⁽¹⁾	According to ACEA level above	According to ACEA level above	Please refer to chapter "Elastomer Compatibility" for limits	Please refer to chapter "Elastomer Compatibility" for limits	Please refer to chapter "Elastomer Compatibility" for limits	According to ACEA level above	Please refer to chapter "Elastomer Compatibility" for limits
Compatibility with PSA elastomers (PSA S22 5106)	-	-	Please refer to chapter "Elastomer Compatibility" for limits (available at Freudenberg, France)	Please refer to chapter "Elastomer Compatibility" for limits (available at Freudenberg, France)	Better or same performances than PSA reference (available at Freudenberg, France)	Better or same performances than PSA reference (available at Freudenberg, France)	Better or same performances than PSA reference (available at Freudenberg, France)

PSA-PEUGEOT-CITROEN engine oil specifications

- 6 -



Specifications	B71 2300	B71 2296	B71 2290	B71 2297	B71 2302	B71 2312	B71 2010
Engine test requirements							
ACEA engine tests	According to ACEA level above	According to ACEA level above	According to ACEA level above	According to ACEA level above	According to ACEA level above	According to ACEA level above	According to ACEA level above
DW10C Engine endurance test, at FEV	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA
DW10B Engine lash adjuster wear test, at APL	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	-	-	Acceptability by PSA
EP6CDT Engine endurance test, with EI0S fuel, at ISP	-	-	-	Acceptability by PSA	Acceptability by PSA	-	-
EC5 400-h endurance test, at PSA	-	-	Once available; acceptability by PSA	Once available; acceptability by PSA	Once available; acceptability by PSA	Once available; acceptability by PSA	Once available; acceptability by PSA
EB2ADTS LSPI test on aged oil, at ISP	-	-	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA	Acceptability by PSA
EB2 Turbo fuel economy test, at ISP	-	Report	-	Better or equal to Ref oil (Total MA7)	Better or equal to Ref oil (Total Quartz Ineo First OW-30)	Better or equal to Ref oil (Total Quartz Ineo First OW-30)	Better or equal to Ref oil (Total Quartz Ineo First OW-20)
EB2NA / EB2ADTS 800h durability test, at PSA	-	EB2NA engine; Acceptability by PSA	-	EB2ADTS engine; Acceptability by PSA	EB2ADTS engine; Acceptability by PSA	EB2ADTS engine; Acceptability by PSA	EB2ADTS engine; Acceptability by PSA
EB2ADTS emissions test, at ISP	-	Report, compared to Ref oil (Total Quartz 7000 5W-40)	-	Better or equal to Ref oil (Total Quartz Ineo HTC 5W-30)	Better or equal to Ref oil (Total Quartz Ineo First OW-30)	Better or equal to Ref oil (Total Quartz Ineo First OW-30)	Better or equal to Ref oil (Total Quartz Ineo First OW-20)
DW10FD 450h PCC endurance test, at PSA	-	-	-	-	Acceptability by PSA	Acceptability by PSA	-
DV5RC 50h sticking test, at PSA	-	-	-	-	-	-	Acceptability by PSA

Notes:

- (1) Please refer to chapter "Elastomer Compatibility" for limits of ACEA 2016.
(2) Additional requirements for first fill.

PSA-PEUGEOT-CITROEN passenger car engine oil requirements

- 1 -



Specifications	B71 2300	B71 2296	B71 2290
Application	Gasoline engines	Turbocharger gasoline & diesel engines without DPF	Diesels with DPF
ACEA basis ⁽¹⁾	A3/B4 ⁻⁰⁸ or A5/B5 ⁻⁰⁸	A3/B4 ⁻⁰⁸	C4 ⁻⁰⁸
SAE viscosity grade	0/5W-30 & 0/5/10W-40	0/5W-30 & 0/5/10W-40	0/5W-30 & 0/5W-40
HTHS (CEC L-36-A-90), mPa.s, min.	2.9	3.5	3.5
Noack volatility (CEC L-40-A-93, loss (B method)), max.	13.0	12.0	11.0
Sulfated ash (ASTM D874), % m/m	> 0.7 & ≤ 1.5	> 0.7 & ≤ 1.5	< 0.50
Phosphorus (ASTM D5185), % m/m, max.	Rate & report	Rate & report	0.09
Sulfur (ASTM D4951, or ASTM D5453), % m/m, max.	Rate & report	Rate & report	0.2
TBN (ASTM D2896), mg KOH/g, min.	8	8	6
TAN (ASTM D664), mg KOH/g, max.	Rate & report	Rate & report	Rate & report
Low temperature pumpability viscosity (ASTM D4684), mPa.s	According SAE J300	According SAE J300	According SAE J300
Density (ISO 12185/NFT 601172), kg/m ³	Rate & report	Rate & report	Rate & report
Flash point (ISO 2592), °C, min.	200	200	200
Pour point (ISO 3016), °C	Rate & report	Rate & report	Rate & report
Copper corrosion (3 hrs at 150 °C) (ISO 2160), rating	1a	1a	1a
Anti-wear properties (60 min - 40daN, Avg. Diameter) (ISO 20623), mm, max.	0.5	0.5	0.5
De-airing at 40 °C (ISO 9120), minutes, max.	35	35	35
Water content (GFC TR-40-A-14), %, max.	0.05	0.05	0.05
Oxidation test TOC (D55 3099), Big tube (150g), 170°C, 360 mg/kg of iron, 10l/h air. Samples at 0, 8, 80, 96, 140 h. (TAN, PAI CO, viscosity)			
TAN (ASTM D664), mg KOH/g, max.	report at 80 h	report at 80 h	report at 96 h
PAI CO, max.	400 at 80 h	400 at 80 h	400 at 96 h
Variation of viscosity at 40°C, %, max.	200% at 80 h	200% at 80 h	200% at 96 h
Variation of viscosity at 100°C, %, max.	report at 80 h	report at 80 h	report at 96 h
MCT (cokefaction test) , (GFC Lu 27), merit, min.	6.0	7.0	7.0
Storage stability test ⁽²⁾ (PSA in-house test method)	See spec for details	See spec for details	See spec for details

PSA-PEUGEOT-CITROEN passenger car engine oil requirements

- 2 -



Specifications	B71 2300	B71 2296	B71 2290
Compatibility test First Fill oils ⁽²⁾ (PSA in-house test method)	See spec for details	See spec for details	See spec for details
Compatibility with plastics ⁽²⁾ (PSA in-house test method)	See spec for details	See spec for details	See spec for details
Particular contamination ⁽²⁾ (ISO 4426)	16 / 13	16 / 13	16 / 13
Filterability ⁽²⁾ (ME 64120 A 014/--B), ΔP (bar) with KN filter			
After 5 minutes, bar, max.	0.05	0.05	0.05
After 50 minutes, bar, max.	0.2	0.2	0.2
FMA, micron, max.	12	12	12
LLR durability , PSA engine durability test at IFP (PSA in-house test method)			
Viscosity increase at 40°C (PAI CO), %, max.	-	-	100
Oil consumption, g/h, max.	-	-	Rate & report
Piston deposits, merit, min.	-	-	5
Ring sticking, max.	-	-	None (for all rings)

Notes:

(1) PSA does not require official ACEA approval, only tests mentioned in their specs. These are based on ACEA 2008 tests and limits.

(2) For Factory Fill only.

RENAULT passenger car engine oil requirements

- 1 -



Specifications	RN17	RN17FE	RN17RSA
Application	All gasoline engines except for sport applications (see RN17RSA). New Euro 6 diesel engines starting mid-2018 and all diesel engines without DPF	Some gasoline engines (see owner's manual). New 1.5l Euro 6 diesel engines starting mid-2018 (see owner's manual)	Renault Sport and Alpine engines
ACEA basis ⁽¹⁾	C3 ⁽¹⁶⁾	C5 ⁽¹⁶⁾	C3 ⁽¹⁶⁾
SAE viscosity grade	5W-30	0W-20	0W-40
HTHS (CEC L-36-A-90), mPa.s, min.	3.5	2.6	4.1
Noack volatility (CEC L-40-A-93, loss (B method)), max.	11.0	11.0	11.0
Sulfated ash (ASTM D874), % m/m	≤ 0.8	≤ 0.8	≤ 0.8
Phosphorus (ASTM D5185), % m/m, max.	0.09	0.09	0.09
Sulfur (ASTM D4951, or ASTM D5453), % m/m, max.	0.3	0.3	0.3
TBN (ASTM D2896), mg KOH/g, min.	7.5	7.5	7.5
TAN (ASTM D664), mg KOH/g, max.	Rate & report	Rate & report	Rate & report
Low temperature pumpability viscosity (ASTM D4684), mPa.s	According SAE J300	According SAE J300	According SAE J300
Density (ISO 12185/NFT 601172), kg/m ³	Rate & report	Rate & report	Rate & report
Flash point (ISO 2592), °C, min.	200	200	200
Pour point (ISO 3016), °C	Rate & report	Rate & report	Rate & report
Copper corrosion (3 hrs at 150 °C) (ISO 2160), rating	Rate & report	Rate & report	Rate & report
HTCBT at 135°C (ASTM D6594), ppm increase, max.			
Copper	20	20	20
Bronze strip rating	1	1	1
Copper strip rating (acc. to ASTM D130), max.	1b	1b	1b
Ball rust test (ASTM D6557), avg. grey value, min.	Rate & report	Rate & report	Rate & report
De-airing at 40 °C (ISO 9120), minutes, max.	35	35	35
Water content (GFC TR-40-A-14), %, max.	0.05	0.05	0.05

RENAULT passenger car engine oil requirements

- 2 -



Specifications	RN17	RN17FE	RN17RSA
Oxidation test TOC (D55 3099), Big tube (150g), 170°C, 360 mg/kg of iron, 10l/h air. Samples at 0, 24, 120, 136, 168 h. (TAN, PAI CO, viscosity) TAN (ASTM D664), mg KOH/g, max. PAI CO, max. Variation of viscosity at 40°C, %, max. Variation of viscosity at 100°C, %, max.	report at 120 h 400 at 120 h 200% at 120 h report at 120 h	report at 120 h 400 at 120 h 200% at 120 h report at 120 h	report at 120 h 400 at 120 h 200% at 120 h report at 120 h
MCT (cokefaction test) , (GFC Lu 27), merit, min.	7.0	7.0	7.0
LLR durability , Renault engine durability test at IFP (Renault in-house test method) Viscosity increase at 40°C, %, max. PAI CO, max. Piston deposits, merit, min. Ring sticking, max.	100 200 3.5 9	- - - -	- - - -
Fuel Economy on NEDC cycle , Renault Fuel Economy test (test engine: K9K636) ⁽²⁾ Fuel economy vs Ref oil (Renault supply, ACEA C4, SAE 5W-30, HTHS 3.2), %, min.	-	≥ 0.0	-

Notes:

(1) Renault does not require official ACEA approval, only tests mentioned in their specs. These are based on ACEA 2016 tests and limits.

(2) Performed by CERTAM.

SCANIA Long Drain Field (LDF) test requirements



- Scania has the following specifications: LDF, LDF-2, LDF-3, Low Ash, LDF-4, LDF-3 FS and LDF-5.
- The Scania specifications are no longer public information, so we are not able to publish these.

VOLVO CAR CORPORATION engine oil specifications

- 1 -



Volvo Car Specifications	VCC RBS0-2AE 0W-20	95200356	95200377
Lastest version date	Sept 10 th 2014	Sept 10 th 2014	Sept 10 th 2014
Application	Volvo Car 0W-20 low ash, long drain, high fuel economy oil. Suitable only for HTHS 2.6 capable Volvo engines starting with the Volvo Engine Architecture (VEA) diesel and gasoline engine platform. Not backward compatible.	Volvo Car high ash standard service fill oil suitable for all gasoline and diesel engines.	Volvo Car high ash, fuel economy, service fill oil suitable for all gasoline and diesel engines.
Main region	Europe and US	China	Worldwide
ACEA level	C2 ⁻¹² Unless otherwise stated per test	A3/B4 ⁻¹²	A5/B5 ⁻¹²
Acceptable SAE grades	0W-20	0W-30	0W-30
Viscosity (ASTM D445) at 150°C, mm ² /s	3.6	Rate & report	Rate & report
Viscosity (ASTM D445) at 100°C, mm ² /s	≥ 7.0 & ≤ 9.3	≥ 11.5 & ≤ 12.5	≥ 9.3 & ≤ 12.6
Shear stability KV100 (CEC L-014-93 or ASTM D6278), Kin. Viscosity, mm ² /s	≥ 7.0 & ≤ 9.3	≥ 9.3 & ≤ 12.5	≥ 9.3 & ≤ 12.6
HTHS viscosity (CEC L-036-90), mPa.s, min.	2.75	3.5	≥ 2.9 & < 3.5
Shear stability HTHS (CEC L-014-93 or ASTM D6278), mPa.s, min.	2.75	3.5	≥ 2.9 & < 3.5
Noack (ASTM D5800), %, max.	13	13	13
Sulfated ash (ASTM D874), % m/m, max.	0.9	≥ 1.0 & ≤ 1.6	≤ 1.6
Phosphorus (ASTM D5185), % m/m	≥ 0.07 & ≤ 0.09	Rate & report	Rate & report
Sulfur (ASTM D4951, or ASTM D5453), max.	0.3	Rate & report	Rate & report
TBN (ASTM D2896), mg KOH/g, min.	7.5	10.0	8.0
Pour point (ASTM D97), °C, max.	-48	Rate & report	-
Copper corrosion (ASTM D130 or ISO2160), rating, max.	1b	1b	1b
Gelation index (ASTM D5133), max.	8.5	-	-
Flash Point (ASTM D93), °C, min.	185	Rate & report	230
Foaming high temperature (ASTM D6082), ml, max.	100/0	100/0	50/0
M111 fuel economy (CEC L-054-96), %, min.	3.4% (avg. of 3 tests)	-	2.5%

VOLVO CAR CORPORATION engine oil specifications

- 2 -



Volvo Car Specifications	VCC RBS0-2AE 0W-20	95200356	95200377
VW TDI (PV 1452)			
Piston deposits, merit, min.	> RL 206 + Std Dev	RL 206 + Std Dev	> RL 206 + Std Dev
Ring sticking, average 1 st gr, ASF, max.	1.0	1.0	1.0
Ring sticking, Max. 1 st / 2 nd gr, ASF, max.	1 / 0	1 / 0	1 / 0
End of test TBN (DIN 51639-1), mgKOH/g, min.	4.0	4.0	4.0
End of test TAN (ASTM D664), max.	Rate & report	Rate & report	Rate & report
OM 646 DE22LA wear (CEC L-099-08)			
Cam wear inlet / outlet valve (average wear 8 cams), µm, max.	100 / 120	100 / 120	100 / 120
Cylinder wear (average 4 cylinders), µm, max.	5.0	5.0	5.0
Bore polishing (13 cm), max value of 4 cylinders, %, max.	3.0	3.0	3.0
Tappet wear inlet/outlet (average wear 8 cams), µm	Rate & report	Rate & report	Rate & report
Piston cleanliness (average 4 pistons), merit, min.	Rate & report	Rate & report	Rate & report
Engine sludge average, merit, min.	Rate & report	Rate & report	Rate & report

VOLVO VDS, MACK EO and RENAULT RLD standards

- 1 -



Specifications	Volvo VDS-3, Mack EO-N, Renault RLD-2 STD 417-0002	Volvo VDS-4, Mack EO-O PP, Renault RLD-3 STD 417-0001	Volvo VDS-4.5, Mack EOS-4.5, Renault RLD-3 STD 417-0003
ACEA / API performance level	ACEA E7 and/or API CI-4	ACEA E9 and/or API CJ-4	ACEA E6, E9, API CJ-4 or CK-4
Viscosity grades (SAE J300)	xW-30, xW-40 (x = 0, 5, 10, 15)	xW-30, xW-40 (x = 0, 5, 10, 15)	xW-30, xW-40 (x = 0, 5, 10, 15)
Laboratory tests			
Density (ASTM D1298), kg/m ³	Report	Report	Report
Flash point COC (ASTM D92), °C	Report	Report	Report
Pour point (ASTM D97), °C	Report	Report	Report
Viscosity (ASTM D445) at 40°C, mm ² /s	Report	Report	Report
at 100°C, mm ² /s	xW-30: 9.3 - 12.5; xW-40: 12.5 - 16.3	xW-30: 9.3 - 12.5; xW-40: 12.5 - 16.3	xW-30: 9.3 - 12.5; xW-40: 12.5 - 16.3
HTHS viscosity (ASTM D4683 or CEC L-36-97), mPa.s	Report	Report	Report
Shear stability (ASTM D7109)			
Viscosity at 100°C after 90 cycles shear (ASTM D445), mm ² /s, min.	xW-30: 9.3; xW-40: 12.5	xW-30: 9.3; xW-40: 12.5	xW-30: 9.3; xW-40: 12.5
HTHS viscosity after 90 cycles shear (ASTM D4683 or CEC L-36-90), mPa.s, min.	xW-30: 3.4; xW-40: 3.7	xW-30: 3.4; xW-40: 3.9	xW-30: 3.4; xW-40: 3.9
Low temperature cranking viscosity (CCS) (ASTM D5293), mPa.s, max.	Acc. to SAE J300	Acc. to SAE J300	Acc. to SAE J300
Low temperature pumping viscosity (MRV) (ASTM D4684), mPa.s, max.	Acc. to SAE J300	Acc. to SAE J300	Acc. to SAE J300
Base oil viscosity at 100°C (ASTM D445), mm ² /s, min. ⁽¹⁾	Report	Report	Report
Evaporative loss (Noack) (ASTM D5800 or CEC L-40-93), %, max.	13	13	13
Sulfated ash (ASTM D874), % m/m, max.	-	1.0	1.0
Phosphorus (ASTM D4951), % m/m, max.	-	0.12	0.12
Sulfur (ASTM D4951), % m/m, max.	-	0.4	0.3
Foaming tendency (ASTM D892)	Run number	1 / 2 / 3	1 / 2 / 3
Sequence I, II, III, ml, max.	10 / 0, 20 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0	10 / 0, 20 / 0, 10 / 0
Corrosion (ASTM D6594)			
Copper increase, ppm, max.	20	20	20
Lead increase, ppm, max.	120	120	120
Copper strip rating (ASTM D130), max.	3	3	3

VOLVO VDS, MACK EO and RENAULT RLD standards

- 2 -



Specifications	Volvo VDS-3, Mack EO-N, Renault RLD-2 STD 417-0002	Volvo VDS-4, Mack EO-O PP, Renault RLD-3 STD 417-0001	Volvo VDS-4.5, Mack EOS-4.5, Renault RLD-3 STD 417-0003
Hot surface oxidation (PDSC) (CEC L-85-99) Oxidation induction time, min., min.	65	-	-
Low temperature pumpability (CEC L-105-12) MRV ⁽³⁾ , mPa.s, max. Yield stress, Pa, max.	According to SAE J300 According to SAE J300	According to SAE J300 According to SAE J300	According to SAE J300 According to SAE J300
Oxidation stability (CEC L-109-14) Viscosity increase, %, max. Oxidation, A/cm, max.	300 120	150 90	130 80
Seal compatibility ⁽⁴⁾ Nitrile, Silicone, Polyacrylate, FKM, Vamac G (ASTM D7216)	Pass	Pass	Pass
Engine tests			
Cummins ISM (ASTM D7468) Run number Merit rating, min. Crosshead weight loss at 3.9% soot, mg, max. Oil filter delta p at 150 h, kPa, max. Engine sludge, average, merit, min. VAS weight loss at 3.9% soot, average, mg, max.	- 7.5 / 7.8 / 7.9 55 / 67 / 74 8.1 / 8.0 / 8.0 -	1000 71 19 8.7 45	1000 71 19 8.7 45
Cummins ISB EGR (ASTM D7484) Run number Slider tappet weight loss, average, max. Cam lobe wear, average, max. Crosshead weight loss, average, mg	- - - -	100 / 108 / 112 50 / 53 / 55 Report	100 / 108 / 112 50 / 53 / 55 Report

VOLVO VDS, MACK EO and RENAULT RLD standards

- 3 -



Specifications	Volvo VDS-3, Mack EO-N, Renault RLD-2 STD 417-0002	Volvo VDS-4, Mack EO-O PP, Renault RLD-3 STD 417-0001	Volvo VDS-4.5, Mack EOS-4.5, Renault RLD-3 STD 417-0003
Mack T-8E (ASTM D5967) ⁽⁵⁾ Run number	1 / 2 / 3		
Relative viscosity at 4.8% soot, max.	1.8 / 1.9 / 2.0	-	-
Slope at 275 h or 5.8% soot (if reached before 275 h), max. ⁽⁶⁾	0.75	-	-
Mack T-10 (ASTM D6987) / Mack T-12 (ASTM D7422)	T-10 / T-12 ^(7,8)	T-12 ⁽⁸⁾	T-12 ⁽⁸⁾
Merit rating, min.	1250 / 1250	1300	1300
Cylinder liner wear, µm, max.	32 / 26	21	21
Top ring weight loss, mg, max.	158 / 117	105	105
Δ lead 0 - 300 h, ppm, max.	35 / 42	30	30
Δ lead 250 - 300 h, ppm, max.	14 / 18	12	12
Oil consumption, g/h, max.	65 / 95	80	80
Mack T-11 or T-11A used oil MRV TP-1 (ASTM D6896) ⁽²⁾			
180 h drain MRV viscosity, mPa.s, max	25000	18000	18000
MRV yield stress, Pa, max.	35	35	35
Mack T-11 (ASTM D7156) Run number		1 / 2 / 3	1 / 2 / 3
TGA soot at 4.0 mm ² /s increase, %, min.	-	3.5 / 3.4 / 3.3	3.5 / 3.4 / 3.3
TGA soot at 12.0 mm ² /s increase, %, min.	-	6.0 / 5.9 / 5.9	6.0 / 5.9 / 5.9
Mack T-12 (ASTM D7422)			
Cylinder liner wear, µm, max.	-	-	21.0
Top ring weight loss, mg, max.	-	-	105
Δ lead 0 - 300 h, ppm, max.	-	-	Report
Δ lead 250 - 300 h, ppm, max.	-	-	Report
Oil consumption, g/h	-	-	Report
Mack T-13 (ASTM D8048)			
KV40 increase (300 - 360 h), %, max.	-	-	50
Oxidation peak height, A/cm, max.	-	-	80
Nitration, A/cm	-	-	Report
Δ lead, ppm, max.	-	-	Report
Average oil consumption (ag. 48 - 192 h), g/h, max.	-	-	40

VOLVO VDS, MACK EO and RENAULT RLD standards

- 4 -



Specifications	Volvo VDS-3, Mack EO-N, Renault RLD-2 STD 417-0002	Volvo VDS-4, Mack EO-O PP, Renault RLD-3 STD 417-0001	Volvo VDS-4.5, Mack EOS-4.5, Renault RLD-3 STD 417-0003
OM 501 LA (CEC L-101-08)			
Piston deposits, average, merit, min.	17	-	-
Bore polish, average, %, max.	2	-	-
Oil consumption, kg/test, max.	9	-	-
Engine sludge, average, merit	Report	-	-
Sequence IIIF (ASTM D6984)			
KV40 increase at 80 h, %, max.	275	-	-
Sequence IIIG (ASTM D7320)			
EOT KV40 increase (adjusted), %, max.	-	150	-
KV40 increase at 100 h (unadjusted), % [B]	-	Report	-
KV40 increase at 80 h (unadjusted), % [C]	-	Report	-
KV40 increase at 60 h (unadjusted), % [D]	-	Report	-
EOT Ratio [(B-C)/(C-D)], max.	-	Report	-
CAT Oil Aeration Test (COAT) (WK 51937)	Run number	1 / 2 / 3	1 / 2 / 3
Average aeration 40 to 50 h, % vol., max.	-	11.6 / 11.7 / 11.8	11.8 / 11.8 / 11.8
Volvo D12D460 (TC 415) ⁽⁹⁾			
Piston deposits, merit, min.	40	40	40
Ring riding, %, max.	50	50	50
Bore polish, cm ² , max.	150	150	150
Oil consumption (400 h), g/h, max.	35	35	35
Oil consumption (final 100 h), g/h, max.	35	35	35
Fuel economy (D12D460) ⁽¹⁰⁾			
Fuel economy, ESC 13 mode (Flat and Hilly) ⁽¹¹⁾ , g/kWh, min.	-	xW-30: p/n 8715091	-
Environmental aspects ⁽¹⁰⁾	STD 900-0008	STD 900-0008	STD 900-0008

Notes:

- (1) The base oil viscosity of the finished oil must always be higher or equal to the base oil viscosity of all test formulations used in the Mack T-12, Cummins ISB and Cummins ISM tests.
- (2) Results from T-10A (or T-12A if established and accepted by ASTM) can be used as an alternative to T-11A results. Limits as for API CI-4 or CI-4 PLUS apply.
- (3) MRV shall be measured at the temperature required for respective W-grade in accordance with SAE J300.
- (4) Additional requirements may apply for factory-fill and Volvo Group-branded products. These are the unadjusted specification limits. Candidate oils need to conform to adjusted limits. Seal results shall be presented along with adjusted specification limits.
- (5) The results for Mack T-11 (ASTM D7156) obtained as part of API CI-4, CI-4 PLUS or CJ-4 approval programs can be used.
- (6) Slope is calculated using derivative of a 3rd order polynomial regression fit of Soot vs Relative Viscosity using the last seven data points (150-300 h).
- (7) The results for Mack T-10 or Mack T-12 can be used.
- (8) If passing results in Volvo T-13 are obtained, only CLW and TRWL data at the listed limits are required.
- (9) Test code: Volvo Powertrain Corporation.
- (10) Applies only to factory-fill and Volvo Group-branded products.
- (11) According to Volvo Powertrain Corp. weighting factors.

VOLKSWAGEN engine oil specifications

- 1 -



Specifications	VW 504.00/507.00	VW 508.00/509.00	VW 508.88/509.99	VW 502.00/505.00	VW 501.01/505.00	VW 505.01	VW First Fill ex. EU
First Fill	TL 521.95	TL 525.77	TL 525.53 (5W-40 only)		-		TL 521.67
Last version date	Dec 2004 / Dec 2004	1-Aug-2017	Apr-13	Dec-14	Mar 2005 / May 2010	Jan-15	March 2005
Service Fill	VW low ash, universal service Fill oil, fully backward compatible and in Europe used for extended drain. Mandatory for diesels with DPF. Only allowed in ultra low sulfur fuel regions.	VW 0W-20 low ash, long drain, high fuel economy oil. Suitable only for HTHS 2.6 capable VW engines in EU and US. Not backward compatible. Not allowed outside EU and USA.	VW high ash oil for outside Europe with different quality fuel than in EU. Normal drain. Not allowed for diesels with DPF. Currently allowed only in Brazil.	VW normal ash service fill oil for gasoline engines under server duty and pump injector diesels WITHOUT DPF.	VW normal ash standard service fill oil. Not allowed for Pump injector diesels. Not allowed for modern day VW engines.	No New Approvals! Existing approvals can requalify as long as no changes. VW mid SAPS stand alone service fill oil for diesel engines at severe duty and pump injector diesels for non DPF diesels	No New Approvals! Existing approvals can requalify as long as no changes. VW mid SAPS factory fill for gasoline engines under severe duty and pump injector diesels without DPF.
ACEA basis	A3/B4-16 (VW DPF test drives to C3)	C5-16	A3/B4 -16	A3/B4 -16	A3/B3 -16	C3-16	C3 -16
SAE viscosity grade	0/5W-30	0W-20	0/5/10W-30/40	0/5W-30/40	0.20W-30..60	0/5W-30/40	5W-40
HTHS (CEC L-36-A-90), mPa.s, min.	3.5	2.6	3.5	3.5	3.5	3.5	3.5
KV 100 (DIN 51562-1), mm ² /s	According SAE J300	≥ 7.8 & ≤ 9.3	According SAE J300	According SAE J300	According SAE J300	According SAE J300	According SAE J300
Shear stability (CEC L-14-A-93), 30 cycles							
KV 100 (DIN 51562-1), mm ² /s, % loss after shear, max.	15%	15%	15%	15%	15%	15%	15%
KV 100 (DIN 51562-1), mm ² /s, after shear, min.	Stay in grade	6.9	Stay in grade	Stay in grade	Stay in grade	Stay in grade	Stay in grade
Noack volatility (CEC L-40-A-93), loss, B method, max.	11%	11%	13%	13%	13%	13%	13%
TBN (DIN 51639-1), mg KOH/g, min.	6.0	6.0	11.0	10.0	8.0	7.0	7.0
Sulfated ash (DIN 51575), % m/m.	≤ 1.5 & Pass VW DPF test	≤ 1.0 & Pass VW DPF test	≥ 1.0 & ≤ 1.5	≥ 1.0 & ≤ 1.5	≤ 1.5	≤ 0.8	≤ 0.8
Chlorine (DIN ISO 15597), % m/m, max.	-	0.0050	-	-	-	-	-
Phosphorus (DIN 51363-3), % m/m.	Rate & Report	Rate & Report	≥ 0.08 & ≤ 0.15	≥ 0.09 ⁽¹⁾	≥ 0.08 ⁽¹⁾	≥ 0.07 ⁽¹⁾	Rate & Report
Sulfur (DIN EN ISO 14596), % m/m, max.	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report	Rate & Report
Zirkonium content (PV1497), % m/m	-	0.0025	-	-	-	-	-
Color. (no norm)	-	Green	-	-	-	-	-

VOLKSWAGEN engine oil specifications

- 2 -



Specifications	VW 504.00/507.00	VW 508.00/509.00	VW 508.88/509.99	VW 502.00/505.00	VW 501.01/505.00	VW 505.01	VW First Fill ex. EU
PAH value (VW 50550 and PV 1448), % m/m ⁽⁶⁾	Rate & Report	Rate & Report	Rate & Report	-	-	-	Rate & Report
Sum PAH 1 till 12, mg/kg, max.	10	10	10	-	-	-	10
Ben(a)pyren, mg/kg, max.	1	1	1	-	-	-	1
Impurities by particles (ISO 4406) ⁽⁶⁾	Class 23/22/18 for 4/6/14 µm, Class 23/18 for 5/15 µm	Class 23/22/18 for 4/6/14 µm, Class 23/18 for 5/15 µm	Class 23/22/18 for 4/6/14 µm, Class 23/18 for 5/15 µm	-	-	-	Class 23/22/18 for 4/6/14 µm, Class 23/18 for 5/15 µm
Emulsion stability (ASTM D7563)							
0°C and 24h.	-	-	No phase separation	-	-	-	-
25°C and 24h.	-	-	No phase separation	-	-	-	-
Oxidation stability (CEC L-109)							
Oil oxidation at 216 h, A/cm, max.	55	55	-	-	-	-	-
Viscosity increase, relative at 216 h, %, max.	50	50	-	-	-	-	-
Corrosion test (PV 1401), corrosion grade, max. ⁽⁶⁾	1	1	1	-	-	-	1
Corrosion test (PV 1425) ⁽⁶⁾							
Steel, grade, max.	1	1	1	-	-	-	1
Copper, grade, max.	2	2	2	-	-	-	2
Weight loss, % m/m, max.	0.5	0.5	0.5	-	-	-	0.5
Corrosion test (PV 1492), corrosion grade, max.	-	-	1	-	-	-	-
Foaming tendency option A (ASTM D892), ml, max., foaming / settling							
Sequence I	10/0	10/0	10/0	10/0	10/0	10/0	10/0
Sequence II	30 / 0	30 / 0	30 / 0	30 / 0	30 / 0	30 / 0	30 / 0
Sequence III	10/0	10/0	10/0	10/0	10/0	10/0	10/0
High temperature foaming (ASTM D6082), max.	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0	100 / 0
VW oil/seal compat. (PV 3344) ⁽²⁾							
AEM1/AEM2	500 h	500 h	168 h	168 h	168 h	168 h	168 h
ACM1	500 h	500 h	168 h	168 h	168 h	168 h	168 h
AK6/1	168 h	168 h	3 x 94 h	3 x 94 h	3 x 94 h	3 x 94 h	3 x 94 h

VOLKSWAGEN engine oil specifications

- 3 -



Specifications	VW 504.00/507.00	VW 508.00/509.00	VW 508.88/509.99	VW 502.00/505.00	VW 501.01/505.00	VW 505.01	VW First Fill ex. EU
M271 Sludge test (MB procedure)							
Engine sludge average, merit, min.	9,1	9,1	9,1	9,1	RL140 + 4Σ	9,1	9,1
OM 646 DE22LA Wear (CEC L-099-08)							
Cam wear inlet / outlet valve (average wear 8 cams), µm, max.	100 / 120	50 / 60	90 / 110	100 / 120	110 / 140	100 / 120	100 / 120
Tappet wear inlet / outlet valve (average wear 8 tappets), µm.	-	Report	-	-	-	-	-
Cylinder wear (average 4 cylinders), µm, max.	5,0	5,0	5,0	5,0	5,0	5,0	5,0
Bore polishing (13 cm), max value of 4 cylinders, %, max.	3,0	3,0	3,0	3,0	3,5	3,0	3,0
Bore polishing (13 cm), avg. value of 4 cylinders, %.	-	Report	-	-	-	-	-
VW T4 (PV 1449)							
Viscosity at 40°C at end of test, mm²/s, max.	200 - VW correction	200 - VW correction	200 - VW correction	200 - VW correction	-	-	200 - VW correction
Vis. increase at 40°C, %, max.	130 - VW correction	130 - VW correction	130 - VW correction	130 - VW correction	-	-	130 - VW correction
TBN end of test, DIN 51639-1, mg KOH/g, min.	Ref Oil (typical 5) - VW correction	Ref Oil (typical 5) - VW correction	Ref Oil + 3 (typical 8) - VW correction	Ref Oil +1 (typical 6) - VW correction			Ref Oil (typical 5) - VW correction
TAN increase end of test, TAN points, max.	4	4	3	4			4
Piston merit, 5 parts, min.	1	1	1	1	-	-	1
Ring sticking, ASF, max.	none	none	none	none	-	-	none
VW Fuel economy (PV 1451)							
FE vs. RL 191 (15W-40), %, min.	OW-30: 2.5% / 5W-30: 2.0%	4.0% ⁽⁴⁾	-	-	-	-	-
VW Fuel economy (PV 1496 Audi EA888)							
FE vs. RL 5W-30, %, min.	only PV 1451 allowed	1.5% ⁽⁴⁾	-	-	-	-	-

VOLKSWAGEN engine oil specifications

- 4 -




Specifications	VW 504.00/507.00	VW 508.00/509.00	VW 508.88/509.99	VW 502.00/505.00	VW 501.01/505.00	VW 505.01	VW First Fill ex. EU
VW TDI (PV 1452)							
Piston deposits, merit, min.	> RL 206 + Std Dev	RL 206 + Std Dev	RL 206 + Std Dev + 2	> RL 206 + Std Dev	> RL 206 + Std Dev - 4	RL 206 + Std Dev	> RL 206 + Std Dev
Ring sticking. average 1 st gr, ASF, max.	1.0	1.0	0.0	1.0	1.2	1.0	1.0
Ring sticking. Max. 1 st / 2 nd gr, ASF, max.	1 / 0	1 / 0	0 / 0	1 / 0	2.5 / 0	1 / 0	1 / 0
End of test TBN (DIN 51639-1), mgKOH/g, min.	Rate & report	Rate & report	6.0	6.0	4.0	Rate & report	Rate & report
End of test TAN (ASTM D664), max.	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report	Rate & report
VW 1.4 L FSI (PV 1481)							
Inlet valve deposits, max.	Ref Oil FSI 5510 - 38.18%	Ref Oil FSI 5510 - 38.18%	Ref Oil FSI 5510 - 38.18%	-	-	-	-
VW DPF 1.9 L TDI (PV 1485)							
Backpressure increase / oil consumption, mbar / kg, max.	6.0	6.0	-	-	-	-	-
VW bio-diesel sludge test (PV 1800)							
Oil sump sludge, merit, min.	Avg low ref oil +/- test stand severity + 40% (high ref minus low ref)	Avg low ref oil +/- test stand severity + 40% (high ref minus low ref)	-	-	-	-	-
Ring sticking, ASF, max.	-	0	-	-	-	-	-
VW RNT wear test	Full test (650 h)	-	-	-	-	250 h test	250 h test
Baumuster Prufung ⁽³⁾	Complete Program	VW508.00/509.00 Program	-	-	-	Short program	Short program

Notes:

- (1) If the phosphorus content is < 0.10 % m/m, functional and/or in-vehicle tests may be required for release. Type and scope of these tests shall be coordinated with VW prior to approval.
- (2) Please refer to chapter "Elastomer Compatibility" for limits.
- (3) Consult VW for actual baumuster requirements.
- (4) For VW508.00/509.00 Fuel Economy performance either PV 1451 or PV 1496, Audi EA888 can be used.
- (5) Control parameter. For information only.
- (6) Factory Fill only.

**ACC, API,
ATC and
ATIEL codes
of practice
(CoP)**

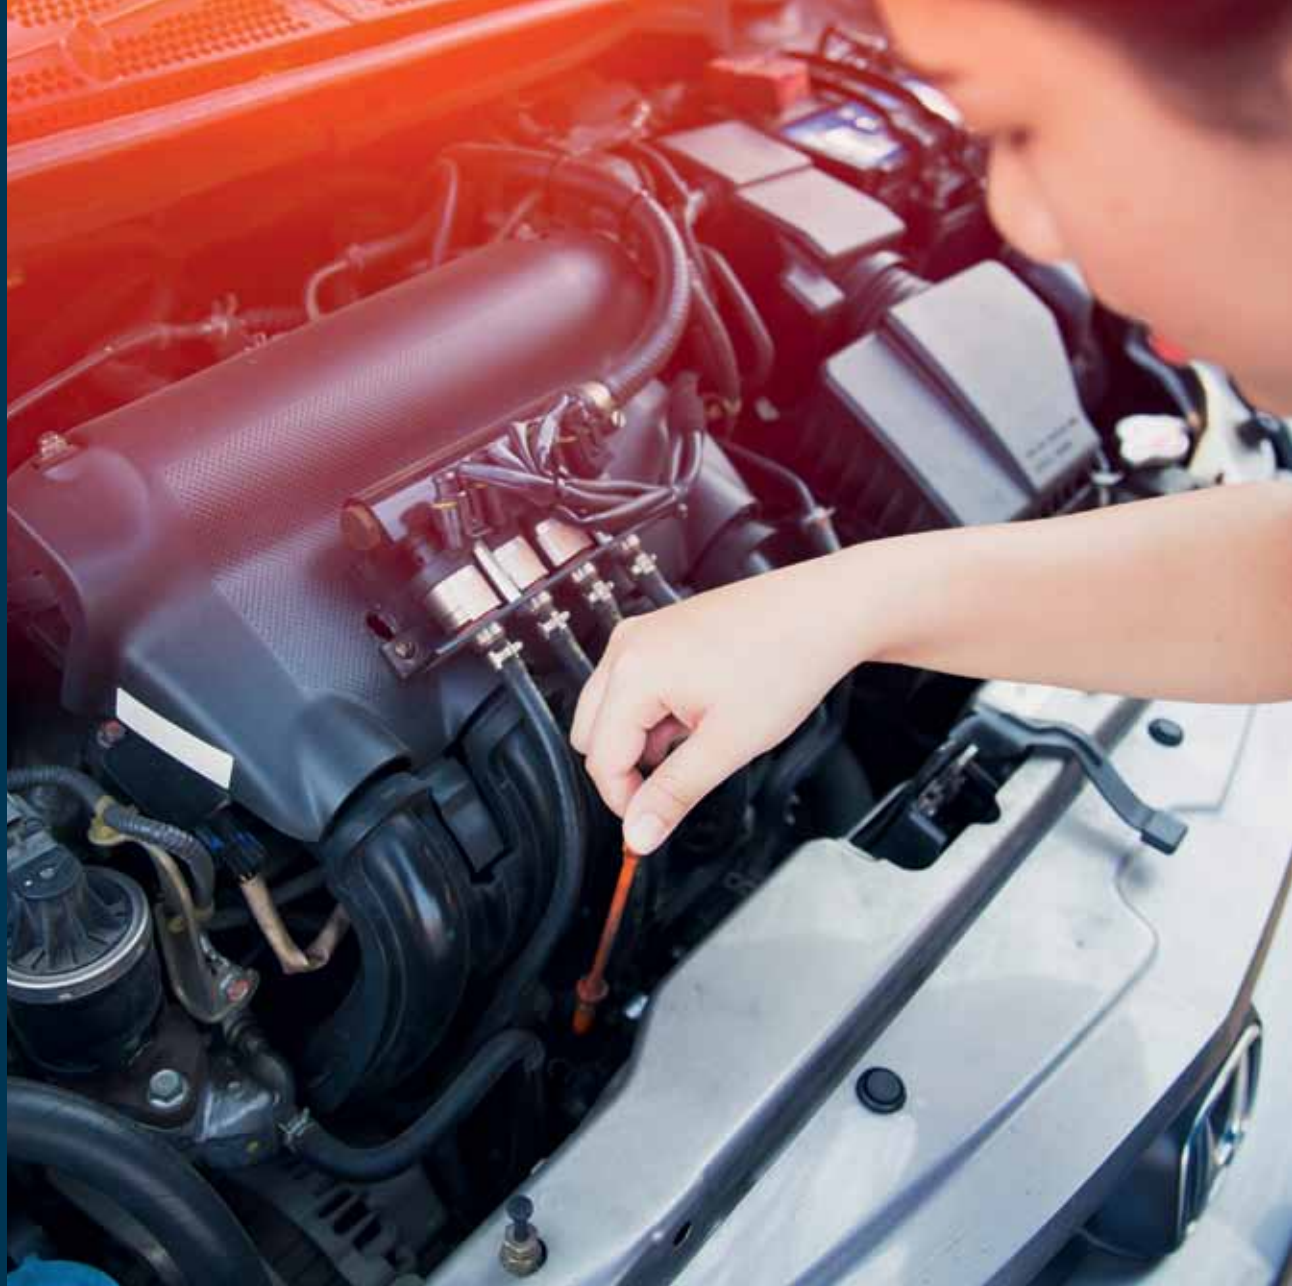

API and ATIEL base stock categories



	Saturates ⁽¹⁾ wt%		Sulfur ⁽²⁾ wt%		Viscosity Index ⁽³⁾
Group I	< 90	and/or	> 0.03	and	80 ≤ VI < 120
Group II	≥ 90	and	≤ 0.03	and	80 ≤ VI < 120
Group III	≥ 90	and	≤ 0.03	and	≥ 120
Group IV	Polyalphaolefins (PAO)				
Group V	All other base stocks not included in Group I, II, III, or IV.				

Notes:

(1) ASTM D2007 / IP129 for Group I or II / IP 129 for Group II or III or IV.

(2) ASTM D2622 / ASTM D4294 / ASTM D4927 / ASTM D3120 may be used.

(3) ASTM D2270.

API EOLCS definitions for Base Oil Interchangeability guidelines



Acc. To Appendix	A	is / are
E.1.2.1	Base stock	A lubricant component that - is produced by a single manufacturer to the same specifications (independent of feed source or manufacturer's location), - meets the same manufacturer's specification, - is identified by a unique formula, product identification number, or both, - may be manufactured using a variety of different processes including but not limited to distillation, solvent refining, hydrogen processing, oligomerization, esterification, and rerefining. Rerefined stock shall be substantially free from materials introduced through manufacturing, contamination, or previous use."
E.1.2.2	Base stock slate	A product line of base stocks that have different viscosities but are in the same base stock grouping and from the same manufacturer.
E.1.2.3	Base oil	The base stock or blend of base stocks used in an API-licensed oil.

ATIEL Code of Practice definitions for base stock interchange guidelines



Acc. To Appendix	A	is / are
A.1	Base oil	The base stock or blend of base stocks which, when mixed with performance additives, is used in an engine lubricant marketed as conforming to ACEA Oil Sequences
A.1	Base stock	A base oil component that: - is produced and used in accordance with the ATIEL Base Oil Quality Assurance (Appendix B) and Interchange Guidelines given in Appendix A of the ATIEL Code of Practice issue 20 - is produced by a single manufacturer or partner group to the same specification, independently of feed source or manufacturer's location, - meets the same manufacturer's or partner group's specification and is identified by a unique formula, product identification number or both, - may be manufactured using a variety of different processes including but not limited to distillation, solvent refining, hydrogen processing, oligomerization, esterification, and re-refining, - is substantially free from materials introduced through manufacturing, contamination, or previous use.
2.1	Base stock manufacturer	A company which produces, at one or more manufacturing sites, base stock(s) for use in lubricants for which compliance with ACEA Oil Sequences is claimed.
A.1	Feedstock	The starting material such as crude oil, refinery intermediate or used lubricating oil from which base stocks are produced at a manufacturing site. A particular feedstock may originate from a single source or multiple sources.
A.1	Base stock slate	A product line of base stocks that: - is produced by the same manufacturer, - meets the ATIEL definition of base stock, - is in the same ATIEL Base Stock Group (I to IV) - may have different specified viscosities and other properties, - has been demonstrated, in lubricants for which compliance with ACEA Oil Sequences is claimed, to be technically substitutable by other appropriate base stocks on the same slate.
A.1	Linked slates	Base stock slates that the lubricant manufacturer or base stock manufacturer or partner group concerned has demonstrated are interchangeable without the need for further engine testing for the tests for which linking has been demonstrated
A.1	Partner group	A voluntary grouping of two or more base stock manufacturers who have: - base stock slates complying with the ATIEL definition of base stock slate, - linked base stock slates on the basis of a written agreement.
A.1	Base oil interchange	The process of substituting base stock(s) from alternative base stock slates in engine lubricants validated as complying with ACEA Oil Sequence(s).

ATIEL base stock interchange guidelines

Use of alternative base stocks in validated formulations



Same slate or linked base stock slate #6.5.1	Base stocks can differ in their physical properties and chemical composition, which may result in differences in the performance of formulated engine lubricants in engine tests and in service. The ATIEL BOI guidelines define the minimum engine test necessary to ensure that the standard of engine lubricant performance defined by the ACEA Oil Sequences will be maintained when one base stock is substituted by another in validated formulations. These guidelines are given in Appendix A. Base stocks having the same quality control specifications are assumed to be interchangeable only if they belong to the same slate or to linked slates and so substitution of a base stock by another base stock within the same base stock slate, or within linked slates is permitted. In all other cases, the base oil interchange guidelines apply.
Guidelines for Base Oil Interchange (BOI) App. A. A4 #6.5.2	Base Oil Interchange Tables (Appendix A - A4) identify which engine tests can be waived ("not required") and which shall be passed ("required") to permit interchange base stocks in an originally-tested engine lubricant formulation with those from a different base stock slate. Passing results are required only for those engine tests that are a requirement of the ACEA categories for which support is being established. Complete ACEA Performance Data Set documentation is required for the original formulation. When applying the guidelines, the performance additive package and its concentration, the viscosity modifier (VM) (possible concentration adjustment shall be less than 15% mass fraction relative) and the viscosity grade of the formulations shall remain the same. BOI test work shall be carried out separately from any possible Viscosity Modifier Interchange or other performance additive package modification. Where base stocks from more than one base stock group are interchanged simultaneously, cumulative base stock substitutions shall not exceed 10% or 30% by mass, as given in the BOI tables in Appendix A.

ACC and ATC guidelines for minor formulation modifications

- 1 -



Oronite

	ACC (*) Appendix H of the ACC Code of Practice		Appendix #	ATC (**) Section h of the ATC Code of Practice	Section #
Performance additive package minor formulation modifications	Level 1	Level 2		Modifications within an ATC data set or programme	
Decrease in treatment level of either the entire performance additive package or its individual components	Not allowed except for ZnDTP or detergent rebalance			Not allowed except for permissible rebalances	h.1
Performance additive package treatment level increase	≤ 20% ⁽⁴⁾	> 20 to ≤ 30%	H 1	Allowed	h.2
Single component of performance additive package increase				Allowed	h.2
- present at > 1.0% in finished oil	≤ 20% ⁽⁴⁾	> 20 to ≤ 30%	H 2		
- present at ≤ 1.0% in finished oil					
• ≤ 0.3%	≤ 100 % ⁽⁴⁾	> 100% to 200% (max 0.6% in formulation to be tested)	H 3.a		
• > 0.3% to ≤ 0.6%	≤ 50 % ⁽⁴⁾	> 50% to 100%	H 3.b		
• > 0.6 % to ≤ 1%	≤ 30 % ⁽⁴⁾	> 30% to 100 % (max 1.3% in formulation to be tested)	H 3.c		
New component addition (Only one Permitted)	Not allowed	≤ 10% of total final performance additive package	H 4	≤ 10% by mass of final Performance Additive Package.	h.3
Rebalance of ZnDTP (Only one permitted)	Not allowed	Allowed while maintaining constant Phosphorus level, this may include introduction of a new ZnDTP	H 5.a	Allowed whilst maintaining constant formulation Phosphorus level.	h.4
Increase in ZnDTP treatment level	Allowed except VIB/VID/VIE/VIF ⁽¹⁾	Required for Seq VIB/VID for 0.04% ≤ Phosphorus ≤ 0.12% increase ⁽¹⁾ Required for all engine tests for increases above 0.12% Phosphorus ⁽¹⁾	H 5.b	This may include introduction of a new ZnDTP: only one new ZnDTP introduction is allowed	
Rebalance of metallic detergents (Only one permitted) ⁽²⁾	Not allowed	Permitted if sulfated ash remains constant Overall soap must not be decreased Soap increase ≤ 30 % per individual soap type ⁽²⁾	H 6	Acceptable provided overall soap level is not decreased, only one new metallic detergent introduction is allowed	h.5

ACC and ATC guidelines for minor formulation modifications

- 2 -



	ACC (*) Appendix H of the ACC Code of Practice		Appendix #	ATC (**) Section h of the ATC Code of Practice	Section #
Performance additive package minor formulation modifications	Level 1	Level 2		Modifications within an ATC data set or programme	
Other limitations		Performance additive package minor modifications ≤ 3 or 4 ⁽³⁾ The sum of all modifications shall not result in an increase in treatment level of any major component > 30%	H 7	No	
Any metallic detergent modification for Seq IX	Not allowed	All modifications which involve a metallic detergent (e.g. performance additive package treat rate increase, metallic detergent increase, metallic detergent rebalance, or new metallic detergent introduction) requires Level 2 sup- port for the Sequence IX	H 11	No	

Notes:

The performance additive package commercialized must include all permitted minor modifications. ACC Appendix H 10, ATC Section h.6.

(*) From ACC CoP Code Bulletin C57 with effective date December 3, 2017: Applies only to sequence IIIF, IIIG, IIHH, IVA, VG, VIB, VID, VIE, VIF, VIII, and IX engine tests.

(**) From ATC CoP Section H, Feb. 2017.

(1) H.5.b) original language: An increase in treatment level of zinc dithiophosphate (ZnDTP), in a formulation where the phosphorus level from ZnDTP is greater than 0.04%, up to a maximum of 0.12 % phosphorus from ZnDTP is acceptable with Level 2 support for the Sequence VIB and/or VID and Level 1 support for all other engine tests. For increases above 0.12% P from ZnDTP, Level 2 support is required for all engine tests. Alternatively, Guideline H2 or H3 could be used if applicable.

(2) The detergent rebalance may be effected simultaneously with the addition of a new metallic detergent component in line with the requirements of Guideline 4. In the specific instance where the soap and metal type of the new component are already present in the formulation, the rebalance counts as one modification. In other cases, the simultaneous rebalance/ addition counts as two minor modifications.

(3) Matrix Core approach allows 4 minor modifications; non-matrix Core approach only allows 3 minor modifications.

(4) See guideline 11 for the Sequence IX test.

ACC and ATC guidelines for minor formulation modifications

- 3 -



Base stocks and other constituents minor formulation modifications	ACC (*) Appendix H of the ACC Code of Practice	Appendix #	ATC (**) Section h of the ATC Code of Practice	Section #																																				
Base stock ratio change: Same slate Different slate	Acceptable with Level 1 support: ≤15% absolute on a normalized to 100 % base stock ratio.	H 8.a	Unrestricted ⁽⁴⁾ Follow the principles given in h.7 (also covers new base stock addition) No change in Gp V permitted	h.8d																																				
New base stock addition Same slate Different slate	Acceptable with Level 1 support: ≤ 15% of base oil (base stock blend) ≤ 10 % in finished oil (Limit to Group I, II, III or IV only)	H 8.a H 8.b	Within same base stock slate Group I to Group I, Group II to Group II, Group III to Group III, Group IV to Group IV is unrestricted. Interchange Base Stock ^{(1), (4)} <table><tr><th>Base stock in original formulation</th><th>Group I</th><th>Group II</th><th>Group III</th><th>Group IV</th><th>Group V</th></tr><tr><td>Group I</td><td>Note 7</td><td>≤10% ⁽⁸⁾</td><td>≤30% >30% ⁽²⁾</td><td>≤30% >30% ⁽²⁾</td><td>≤10 ⁽²⁾</td></tr><tr><td>Group II</td><td>≤10% ⁽⁸⁾</td><td>≤10% ⁽⁸⁾</td><td>≤30% >30% ⁽²⁾</td><td>≤30% >30% ⁽²⁾</td><td>≤10 ⁽²⁾</td></tr><tr><td>Group III</td><td>None ⁽⁸⁾</td><td>None ⁽⁸⁾</td><td>≤10% ⁽⁶⁾⁽⁸⁾</td><td>≤30</td><td>≤10 ⁽²⁾</td></tr><tr><td>Group IV</td><td>None ⁽⁸⁾</td><td>None ⁽⁸⁾</td><td>None</td><td>Note 3</td><td>≤10 ⁽²⁾</td></tr><tr><td>Group V</td><td>None</td><td>None</td><td>None</td><td>None</td><td>None</td></tr></table>	Base stock in original formulation	Group I	Group II	Group III	Group IV	Group V	Group I	Note 7	≤10% ⁽⁸⁾	≤30% >30% ⁽²⁾	≤30% >30% ⁽²⁾	≤10 ⁽²⁾	Group II	≤10% ⁽⁸⁾	≤10% ⁽⁸⁾	≤30% >30% ⁽²⁾	≤30% >30% ⁽²⁾	≤10 ⁽²⁾	Group III	None ⁽⁸⁾	None ⁽⁸⁾	≤10% ⁽⁶⁾⁽⁸⁾	≤30	≤10 ⁽²⁾	Group IV	None ⁽⁸⁾	None ⁽⁸⁾	None	Note 3	≤10 ⁽²⁾	Group V	None	None	None	None	None	h.7i h.7i
Base stock in original formulation	Group I	Group II	Group III	Group IV	Group V																																			
Group I	Note 7	≤10% ⁽⁸⁾	≤30% >30% ⁽²⁾	≤30% >30% ⁽²⁾	≤10 ⁽²⁾																																			
Group II	≤10% ⁽⁸⁾	≤10% ⁽⁸⁾	≤30% >30% ⁽²⁾	≤30% >30% ⁽²⁾	≤10 ⁽²⁾																																			
Group III	None ⁽⁸⁾	None ⁽⁸⁾	≤10% ⁽⁶⁾⁽⁸⁾	≤30	≤10 ⁽²⁾																																			
Group IV	None ⁽⁸⁾	None ⁽⁸⁾	None	Note 3	≤10 ⁽²⁾																																			
Group V	None	None	None	None	None																																			
Matrix approach	Use the API base oil interchangeability guidelines		Tests which are not deemed to be sensitive to base stock changes may be run in any applicable base stock (as per the ATIEL Code base oil interchange principles)	h.7.2																																				

ACC and ATC guidelines for minor formulation modifications

- 4 -



Base stocks and other constituents minor formulation modifications	ACC (*) Appendix H of the ACC Code of Practice	Appendix #	ATC (**) Section h of the ATC Code of Practice	Section #
Viscosity modifier treat level change	≤ 15% relative within Level 1	H 8.c	≤ 15% relative allowed without further support >15 % relative is allowed if in alignment with ATIEL Viscosity Grade Read Across Guidelines	h.8a
Pour point depressant treat level or type change	Acceptable with Level 1	H 9	Acceptable	h.8b
Antifoam treat level or type change	Acceptable with Level 1 except COAT ⁽⁵⁾	H 9	Acceptable	h.8c

Notes:

The performance additive package commercialized must include all permitted minor modifications. (ACC Appendix H 10, ATC Section h.9).

(*) From ACC CoP Code Bulletin C57 with effective date December 3, 2017; Applies only to sequence IIIF, IIIG, IIH, IVA, VG, VIB, VID, VIE, VIF, VIII, and IX engine tests.

(**) From ATC CoP Section H, Feb. 2017: Cumulative substitutions must not exceed 10% or 30% by mass, as relevant and as defined above, from any initial/intermediate candidate for which test data are to be retained in support of the final candidate without specific engine test data.

With specific engine test data, replacement of Gp I or II with Gp III or IV is unlimited.

Where changes such as above are introduced as the result of failing engine test data, and to pass an engine test, the reverse substitution may not be made subsequently, even if apparently allowed under the rules above, without the relevant engine test having been re-run and passed on a system representative of the final base stock mix to be promoted.

(1) All percentages are %m of the finished oil.

(2) Allowed with specific engine test data from the specific engine test.

(3) Substitution of Gp IV by another manufacturer's Gp IV is allowed as defined by the ATIEL Code of Practice Issue Number 20, Appendix A, Section A1.

(4) Base stock groupings are as defined by the ATIEL Code of Practice Issue Number 20, Appendix A, Section A1.

(5) Published in Code Bulletin C-48 effective April 22, 2016: When changing foam inhibitor type or treatment level in the Caterpillar Oil Aeration Test (COAT), Level 1 support alone is not adequate; fundamental formulation knowledge support must exist to ensure performance is not deteriorated in this test.

(6) For the TU5JP, follow ATIEL Code of Practice Issue Number 19, Appendix B, Table B.3. For other engine tests, follow the table above.

(7) Follow ATIEL Code of Practice Issue Number 20, Appendix A, Table A.4.2 BOI Tables for engine tests listed there. For the TU5JP and DV43E follow ATIEL Code of Practice Issue Number 19, Appendix B.

(8) For the MIIIIE, follow the requirements of the ATIEL Code of Practice Issue Number 20, Appendix A, Table BOI.3. For other engine tests, follow the table above.

ACC guidelines for program guidelines



Program guidelines built on existing Core Data sets developed under the ACC code	ACC (*) Appendix I of the ACC Code of Practice		Appendix #
	Level 1	Level 2	
Uptreat of Performance additive package treatment level	≤ 20% except for Seq IX	≤ 20% for Seq IX	I 1 a)
Uptreat of additives already present or additives which were not present in the original tested formulation	Not allowed	Any amount	I 1 b)
New component addition	Not allowed	Any amount	I 1
Change in viscosity modifier shear stability within the same chemical type ⁽¹⁾ and manufacturer	Not allowed	Allowed	I 3
Addition of dispersant for monograde or other grade with a lower dispersant viscosity modifier treatment level compared to what was used in a multigrade program will be defined by Seq VG	Not allowed	Required for all Sequence engine tests except VG	I 4
Substitution of Group III or Group IV base stock for Group I, Group II, and/or Group III base stock is allowed with Level 2 support.	Not allowed	Allowed	I 5
Substitution of API Group V base stock for up to 10% of the base stock for PCMOs and diesel engine oils	Not allowed	Allowed	I 6

Notes:

The performance additive package commercialized must include all permitted minor modifications. ACC Appendix H 10, ATC Section h.6.

(*) From ACC CoP Code Bulletin C57 with effective date December 3, 2017.

(1) Chemical type means chemical family, such as, but not limited to, styrene ester, polymethacrylate, styrene butadiene, styrene isoprene, polyisoprene, olefin copolymer, and polyisobutene.

Chevron

Chevron

ACC	Level 1 ACC CoP Appendix E 2	INITIAL & MODIFIED FORMULATIONS • Analytical Testing - All additive elements known to be present - TBN (ASTM D2896) FINAL FORMULATION • Analytical Testing - All additive elements known to be present - TBN (ASTM D2896) - IR (Infrared trace) • Base Stock Analysis - Saturates (ASTM D2007) - Sulfur (ASTM D1552/ D2622/ D3120/ D4294/ D4297) - Viscosity Index (ASTM D2270)	• Rheological Testing - Viscosity at 100°C (ASTM D445) - CCS (if W grade) (ASTM D5293) - HTHS at 150°C (ASTM D4683, D4624, or D4741)
	Level 2 = Level 1+ ACC CoP Appendix E 3 and definition of Level 2 support in Glossary of Terms Tab 1	• Engine Tests / Final Formulation - Full length ASTM operationally valid engine tests on oils containing performance additive package(s) representative of the chemistry in the final formulation. - ASTM calibrated test stands to be used in all cases. - Tests limited to the following: - statistically designed engine test matrices, or - complete engine test programs, or - partial set of tests from same technology family	• Demonstrate No Harm

ACC and ATC guidelines data required for candidate data packages

- 2 -



ACC	ATC CoP Section G g.4	FOR ALL SUPPORTING AND FINAL FORMULATIONS: • Analytical Testing - Finished oil metals where present - Finished oil S, N, Si, P, Cl ⁽¹⁾ - TBN (ASTM D2896) - Sulfated ash (ASTM D874)	• Rheological Testing - Viscosity at 100°C (ASTM D445) - CCS (if W grade) (ASTM D5293) • Treatment level in finished oil of - Performance additive package - Base stocks - Viscosity Modifier - Other constituents
	ATC CoP Section G g.2	• Base Stock Analysis - Saturates (ASTM D2007 or IP129) - Sulfur (ASTM D2622 or ASTM D4294 or ASTM D4927 or ASTM D3120) - Viscosity Index (ASTM D2270)	

Notes:

(1) Cl determination is only required on the final formulation and where an ACEA A/B or C claim is being made.

API guidelines for:

- Viscosity grade
read-cross (VGRA)
- Base oil
interchange (BOI)



API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



F.1.3

Tables F-2 through F-19 on following pages indicate when a viscosity grade read-across is allowed (X) and not allowed (-).

For viscosity grades not included in those tables, read across is allowed for certain tests if the viscosity grades meet all the applicable technical principles described in Table F-1.

Read-across for viscosity grades not covered by Table F-1 through F-20 is not allowed until API's BOI/VGRA Task Force reviews the justification and data supporting a change to the tables and recommends the change to the API Lubricants Standard Group and the Lubricants Standard Group approves the change.

Check marks in Table F-1 indicate which technical principles apply to a specific test.

Table F-1A

Passenger car motor oils	Sequence									
	IID	L-38/ VIII	IIIE/IIIF/IIIG	IIIGA ⁽²⁾	IIIGB	IVA	VE	VG	VIA/VIB/VID/VIE	VIA/VIB/VID
Detergent (dispersant)-inhibitor (DI) content of the read-across viscosity grade shall be equal to, or higher than, that of the original viscosity grade. The increase in DI is limited to the maximum allowed by the ACC Code of Practice	✓	✓	✓	✓	✓	✓	✓	✓	✓	(3)
Base stock blend kinematic viscosity at 100°C of the read-across viscosity grade must be equal to or higher than that of the original viscosity grade, considering the precision of the test method	NA	NA	✓	✓	NA	✓	✓	✓	NA	(3)
The viscosity modifier (VM) content of the read-across viscosity grade must be equal to or lower than that of the original viscosity grade	NA	NA	(4)	(4)	NA	(4)	✓	✓ or (5)	✓ or (5)	(3)

Table F-18

Passenger car motor oils	Sequence				
	IIIH	IIHIB	IVB	VH	X
Detergent (dispersant)-inhibitor (DI) content of the read-across viscosity grade shall be equal to, or higher than, that of the original viscosity grade. The increase in DI is limited to the maximum allowed by the ACC Code of Practice	✓	✓	✓	✓	✓
Base stock blend kinematic viscosity at 100°C of the read-across viscosity grade must be equal to or higher than that of the original viscosity grade, considering the precision of the test method	✓	NA	✓	✓	NA
The viscosity modifier (VM) content of the read-across viscosity grade must be equal to or lower than that of the original viscosity grade	✓	NA	✓ and (8)	✓ or (5)	(7)

Diesel engine oils	1M-PC
Detergent (dispersant)-inhibitor (DI) content of the read-across viscosity grade shall be equal to or higher than that of the original viscosity grade. The increase in DI is limited to the maximum allowed by the ACC Code of Practice	✓
Base stock blend kinematic viscosity at 100°C of the read-across viscosity grade must be equal to or higher than that of the original viscosity grade, considering the precision of the test method	✓
The viscosity modifier (VM) content of the read-across viscosity grade must be equal to or lower than that of the original viscosity grade	✓
Finished oil volatility of the read-across viscosity grade must be equal to or lower than that of the original viscosity grade	✓

Notes:

(1) ✓ = principle is applicable; NA = not applicable.

(2) Technical principles for the Sequence IIIGA are limited to 0W, 5W, and 10W multigrades.

(3) New viscosity grades and associated read-across can only be added after review by the API BOI/VGRA Task Force and approval by the API Lubricants Committee.

(4) Viscosity modifier content must be no more than 1.5 times higher than the viscosity modifier content in the oil on which the test was run.

(5) For dispersant-type VM, the VM content of the read-across viscosity grade must be equal to or higher than the original viscosity grade.

(6) Read-across viscosity grades must contain an equal amount of the same group V base stock (e.g., ester) in the finished oil blend if a Group V base stock is used in the original viscosity grade.

(7) Viscosity modifier content must be no more than 2.5 times higher than the viscosity modifier content in the oil on which the test was run.

(8) Relative viscosity modifier treat level was not found to be a statistically significant factor impacting Seq. IVB performance. The range of relative VM treat rates evaluated in the BOI/VGRA matrix was 1.0x to 1.7x.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



L-38/Sequence VIII tests - Table F-2

Can Be "Read-Across" to:													
Test Run on	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
5W-20	NA	X	X	X	X	X	X	X	X	X	X	X	X
5W-30	X	NA	X	X	X	X	X	X	X	X	X	X	X
10W	—	—	NA	—	—	—	—	X	—	—	X	X	X
10W-30	—	—	X	NA	X	X	X	X	X	X	X	X	X
10W-40	—	—	X	X	NA	X	X	X	X	X	X	X	X
15W-40	—	—	—	X	X	NA	X	X	X	X	X	X	X
15W-50	—	—	—	—	X	X	NA	X	X	X	X	X	X
20W	—	—	—	—	—	—	—	NA	—	—	X	X	X
20W-40	—	—	—	—	—	X	X	X	NA	X	X	X	X
20W-50	—	—	—	—	—	—	X	X	X	NA	X	X	X
30	—	—	—	—	—	—	—	—	—	—	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	—	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	NA

Table F-3

Viscosity Grade	L-38/Sequence VIII 10 hr Stripped Kinematic Viscosity@100 °C (mm ² /s), min	ASTM D6278 (30 Passes) Kinematic Viscosity@100 °C (mm ² /s), min
XW-16	6,1	5,8
XW-20	6,9	6,5
XW-30	9,3	8,5
XW-40	12,5	11,5
XW-50	16,3	15,0
XW-60	21,9	19,8

Notes:

- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
- (2) A dash (—) means that read-across is not permitted; NA = not applicable.
- (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
- (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.
- (5) The read-across in table F-2 applies only to bearing weight loss and piston varnish.
- (6) All multigrade oils must meet the requirement of Table F-3. Data to support stay-in-grade performance shall be maintained by the licensee for active API Service Categories and ILSAC specifications. Either CRC L-38/Sequence VIII or ASTM D6278 (30 passes) may be used to support stay-in-grade requirements where the limits are listed in Table F-3.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence IID - Table F-4

Can Be "Read-Across" to:													
Test Run on	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
5W-20	NA	X	X	X	X	X	X	X	X	X	X	X	—
5W-30	X	NA	X	X	X	X	X	X	X	X	X	X	—
10W	—	—	NA	—	—	—	—	X	—	—	X	X	—
10W-30	—	—	X	NA	X	X	X	X	X	X	X	X	—
10W-40	—	—	X	X	NA	X	X	X	X	X	X	X	—
15W-40	—	—	—	X	X	NA	X	X	X	X	X	X	X
15W-50	—	—	—	—	X	X	NA	X	X	X	X	X	X
20W	—	—	—	—	—	—	—	NA	—	—	X	X	X
20W-40	—	—	—	—	X	X	X	X	NA	X	X	X	X
20W-50	—	—	—	—	—	X	X	X	X	NA	X	X	X
30	—	—	—	—	—	—	—	X	—	—	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	X	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	NA

Notes:

- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
- (2) A dash (—) means that read-across is not permitted; NA = not applicable.
- (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
- (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence IIIE/IIIF/IIIG/IIIGB tests - Table F-5

Can Be "Read-Across" to:													
Test Run on	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
5W-20	NA	—	X	X	—	—	—	X	X	X	X	X	X
5W-30	X*	NA	X	X	X	X	X	X	X	X	X	X	X
10W	—	—	NA	—	—	—	—	X	—	—	X	X	X
10W-30	—	—	X	NA	X	X	X	X	X	X	X	X	X
10W-40	—	—	X	X	NA	X	X	X	X	X	X	X	X
15W-40	—	—	—	X	X	NA	X	X	X	X	X	X	X
15W-50	—	—	—	—	—	X	NA	—	X	X	X	X	X
20W	—	—	—	—	—	—	—	NA	—	—	X	X	X
20W-40	—	—	—	—	—	—	—	X	NA	X	X	X	X
20W-50	—	—	—	—	—	—	—	—	X	NA	X	X	X
30	—	—	—	—	—	—	—	—	—	—	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	—	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	NA

Notes:

- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
- Viscosity modifier content must be no more than 1.5 times higher than the viscosity modifier content in the oil on which the test was run.
- (2) A dash (—) means that read-across is not permitted; NA = not applicable.
- (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
- (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.
- (a) The read from 5W-30 to 5W-20 applies to Sequence IIIF/IIIG only.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence IIH - Table F-6

Can Be "Read-Across" to:																
Test Run on	0W-16	0W-20	0W-30	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
0W-16	NA	—	—	X	—	X	X	—	—	—	X	X	—	X	X	X
0W-20	X	NA	—	X	—	X	X	—	—	—	X	X	X	X	X	X
0W-30	X	X	NA	X	X	X	X	X	X	—	X	X	X	X	X	X
5W-20	—	—	—	NA	—	—	X	—	—	—	X	X	—	X	X	X
5W-30	—	—	—	X	NA	—	X	—	X	—	X	X	X	X	X	X
10W	—	—	—	—	—	NA	—	—	—	—	X	—	—	X	X	X
10W-30	—	—	—	—	—	—	NA	—	—	—	X	X	X	X	X	X
10W-40	—	—	—	—	—	—	X	NA	X	—	X	X	X	X	X	X
15W-40	—	—	—	—	—	—	—	—	NA	—	X	X	X	X	X	X
15W-50	—	—	—	—	—	—	—	—	X	NA	X	X	X	X	X	X
20W	—	—	—	—	—	—	—	—	—	—	NA	X	—	X	X	X
20W-40	—	—	—	—	—	—	—	—	—	—	—	NA	—	—	X	X
20W-50	—	—	—	—	—	—	—	—	—	—	—	X	NA	—	X	X
30	—	—	—	—	—	—	—	—	—	—	—	—	—	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	NA

- Notes:**
- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Standards Group. Viscosity modifier content should not be higher than that in the oil tested.
 - (2) A dash (—) means that read-across is not permitted; NA = not applicable.
 - (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
 - (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence IIIGA and ROBO tests - Table F-7

Can Be "Read-Across" to:					
Test Run on	5W-20	5W-30	10W	10W-30	10W-40
5W-20	NA	—	X	X	—
5W-30	X	NA	X	X	X
10W-30	—	—	X	NA	X
10W-40	—	—	X	X	NA

Notes:

(1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
Viscosity modifier content must be no more than 1.5 times higher than the viscosity modifier content in the oil on which the test was run.

(2) A dash (—) means that read-across is not permitted; NA = not applicable.

(3) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence IVA Test - Table F-8

Can Be "Read-Across" to:													
Test Run on	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
5W-20	NA	—	X	X	—	—	—	X	Xa	Xa	X	X	X
5W-30	X	NA	X	X	X	X	X	X	X	X	X	X	X
10W	—	—	NA	—	—	—	—	X	—	—	X	X	X
10W-30	—	—	—	NA	—	X	—	X	X	X	X	X	X
10W-40	—	—	—	X	NA	X	X	X	X	X	X	X	X
15W-40	—	—	—	X	—	NA	X	X	X	X	X	X	X
15W-50	—	—	—	—	—	—	NA	—	X	X	X	X	X
20W	—	—	—	—	—	—	—	NA	—	—	X	X	X
20W-40	—	—	—	—	—	X	—	—	NA	X	X	X	X
20W-50	—	—	—	—	—	—	—	—	—	NA	X	X	X
30	—	—	—	—	—	—	—	—	—	—	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	—	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	NA

Notes:

- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
- (2) A dash (—) means that read-across is not permitted; NA = not applicable.
- (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
- (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.
- (a) Read-across permitted if requirements in F.1.3 are met.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence IVA Test - Table F-9

Can Be "Read-Across" to:									
Test Run on	0W-16	0W-20	0W-30	5W-20	5W-30	10W-30	10W-40	15W-40	20W-50
0W-16	NA	X	X	X	X	X	X	X	X
0W-20	X	NA	X	X	X	X	X	X	X
0W-30	X	X	NA	X	X	X	X	X	X
5W-20	—	—	—	NA	X	X	X	X	X
5W-30	—	—	—	X	NA	X	X	X	X
10W-30	—	—	—	—	—	NA	X	X	X
10W-40	—	—	—	—	—	X	NA	X	X
15W-40	—	—	—	—	—	—	—	NA	—
20W-50	—	—	—	—	—	—	—	—	NA

- Notes:**
- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Group.
 - (2) A dash (—) means that read-across is not permitted; NA = not applicable.
 - (3) Relative viscosity modifier treat level was not found to be a statistically significant factor impacting Seq. IVB performance. The range of relative VM treat rates evaluated in the BOI/VGRA matrix was 1.0x to 1.7x.
 - (4) New viscosity grade and associated read-across are allowed if the requirements described in F1.3 are met.
 - (5) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence VE/VG test nondispersant viscosity modifier - Table F-10

Can Be "Read-Across" to:													
Test Run on	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
5W-20	NA	—	X	X	—	—	—	X	—	—	X	X	—
5W-30	X	NA	X	X	X	X	X	X	X	X	X	X	—
10W	—	—	NA	—	—	—	—	X	—	—	X	X	—
10W-30	—	—	—	NA	—	X	—	X	X	X	X	X	—
10W-40	—	—	—	X	NA	X	X	X	X	X	X	X	—
15W-40	—	—	—	X	—	NA	X	X	X	X	X	X	X
15W-50	—	—	—	—	—	—	NA	—	X	X	X	X	X
20W	—	—	—	—	—	—	—	NA	—	—	X	X	X
20W-40	—	—	—	—	—	X	—	—	NA	X	X	X	X
20W-50	—	—	—	—	—	—	—	—	—	NA	X	X	X
30	—	—	—	—	—	—	—	—	—	—	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	—	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	NA

Notes:

- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
- (2) A dash (—) means that read-across is not permitted; NA = not applicable.
- (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
- (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence VE/VG test dispersant viscosity modifier ^(a) - Table F-11

Can Be "Read-Across" to:													
Test Run on	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
5W-20	NA	X	—	X	X	X	X	—	X	X	—	—	—
5W-30	—	NA	—	X ^b	X	X	X	—	X	X	—	—	—
10W	—	—	NA	—	—	—	—	X	—	—	X	X	—
10W-30	—	—	—	NA	X	X	X	—	X	X	—	—	—
10W-40	—	—	—	X	NA	X	X	—	X	X	—	—	—
15W-40	—	—	—	X	X	NA	X	—	X	X	—	—	—
15W-50	—	—	—	—	—	—	NA	—	X	X	—	—	—
20W	—	—	—	—	—	—	—	NA	—	—	X	X	X
20W-40	—	—	—	—	—	X	X	—	NA	X	—	—	—
20W-50	—	—	—	—	—	—	X	—	—	NA	—	—	—
30	—	—	—	—	—	X	X	—	X	X	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	—	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	NA

Notes:

- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
- (2) A dash (—) means that read-across is not permitted; NA = not applicable.
- (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
- (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.
- (a) Read-across is allowed to formulations with an equal or higher concentration of dispersant viscosity modifier.
- (b) 10W-30 read-across is permitted at a lower concentration of dispersant viscosity modifier than the 5W-30 provided that a passing SAE 30 is also obtained on the formulation where the DI treat remains unchanged.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence VH test nondispersant viscosity modifier - Table F-12

Can Be "Read-Across" to:																
Test Run on	0W-16	0W-20	0W-30	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
0W-16	NA	—	—	X	—	X	X	—	X	—	X	X	X	X	X	X
0W-20	X	NA	—	X	X	X	X	—	X	—	X	X	X	X	X	X
0W-30	X	X	NA	X	X	X	X	X	X	X	X	X	X	X	X	X
5W-20	—	—	—	NA	—	X	X	—	X	—	X	X	X	X	X	X
5W-30	—	—	—	X	NA	X	X	X	X	—	X	X	X	X	X	X
10W	—	—	—	—	—	NA	—	—	—	—	X	X	X	X	X	X
10W-30	—	—	—	—	—	—	NA	—	X	—	X	X	X	X	X	X
10W-40	—	—	—	—	—	—	X	NA	X	—	X	X	X	X	X	X
15W-40	—	—	—	—	—	—	—	—	NA	—	X	X	X	X	X	X
15W-50	—	—	—	—	—	—	—	—	X	NA	X	X	X	X	X	X
20W	—	—	—	—	—	—	—	—	—	—	NA	X	—	—	X	X
20W-40	—	—	—	—	—	—	—	—	—	—	—	NA	—	—	X	X
20W-50	—	—	—	—	—	—	—	—	—	—	—	—	NA	—	X	X
30	—	—	—	—	—	—	—	—	—	—	—	—	—	NA	X	X
40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	NA	X
50	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	NA

- Notes:**
- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Standards Group.
 - (2) A dash (—) means that read-across is not permitted; NA = not applicable.
 - (3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3 are met.
 - (4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence VID test - Table F-13

Can Be "Read-Across" to:								
Test Run on	OW-20	5W-20	OW-30	5W-30	10W-30	OW-40	5W-40	10W-40
OW-20	NA	X1	—	—	—	—	—	—
5W-20	X1	NA	—	—	—	—	—	—
OW-30	X2	X2	NA	X1	X1	—	—	—
5W-30	X2	X2	X1	NA	X1	—	—	—
10W-30	X2	X2	X2	X2	NA	X1	X1	X1
OW-40	—	—	—	—	X1	NA	X1	X1
5W-40	—	—	—	—	X1	X1	NA	X1
10W-40	—	—	—	—	X1	X1	X1	NA

Notes:

X1 = VGRA is allowed if HTHS@100°C (D6616) of the candidate oil is less than or equal to the original tested oil OR if HTHS@100°C (D6616) of the candidate oil meets the conditions of equations shown below.
X2 = VGRA is allowed if the original tested oil meets the FEI Sum and FEI2 limit requirements for the read-across viscosity grade and the HTHS@100°C (D6616) of the candidate oil is less than or equal to the original tested oil.

Equations F.1.0

Testing is not required if both equations are true:

$$HCandidate \leq HOriginal + \{(FEISumLimit - FEISumOriginal) / -0.485\} + (HOriginal * R)$$

$$HCandidate \leq HOriginal + \{(FEI2Limit - FEI2Original) / -0.227\} + (HOriginal * R)$$

Where:

HCandidate is the HTHS@100°C of the candidate oil as measured by ASTM D6616
HOriginal is the HTHS@100°C of the original tested oil as measured by ASTM D6616
FEISumLimit is the FEI sum passing limit for the original tested viscosity grade
FEISumOriginal is the FEI sum (FEIOriginal + FEI2Original) result of the original tested oil
-0.485 is the FEISum coefficient from the Seq. VID industry matrix model
FEI2Limit is the FEI2 passing limit for the original tested viscosity grade
FEI2Original is the FEI2 result of the original tested oil
-0.227 is the FEI2 coefficient from the Seq. VID industry matrix model

R is the reproducibility as reported in the most recent version of ASTM D6616. The current R = 0.035 (3.5%) for ASTM D6616-07.

The range of the HTHS@100°C used to develop the Seq. VID industry matrix model was 5.44 to 7.68 cP (5.25 to 7.95 cP when allowance is made for D6616 reproducibility).

This information is for reference. It does not restrict application of the guidelines by the marketer who is responsible for ensuring that each licensed engine oil satisfies all engine and bench test performance requirements.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Sequence VIE test - Table F-14

Can Be "Read-Across" to:								
Test Run on	0W-20	5W-20	0W-30	5W-30	10W-30	0W-40	5W-40	10W-40
0W-20	NA	X1	—	—	—	—	—	—
5W-20	X1	NA	—	—	—	—	—	—
0W-30	X2	X2	NA	X1	X1	—	—	—
5W-30	X2	X2	X1	NA	X1	—	—	—
10W-30	X2	X2	X2	X2	NA	X1	X1	X1
0W-40	—	—	—	—	X1	NA	X1	X1
5W-40	—	—	—	—	X1	X1	NA	X1
10W-40	—	—	—	—	X1	X1	X1	NA

Notes:

X1 = VGRA is allowed if HTHS@150°C (D4683) of the candidate oil is less than or equal to the original tested oil OR if HTHS@150°C (D4683) of the candidate oil meets the conditions of equations shown below.

X2 = VGRA is allowed if the original tested oil meets the FEI Sum and FEI2 limit requirements for the read-across viscosity grade and the HTHS@100°C (D6616) of the candidate oil is less than or equal to the original tested oil.

Equations F.1.0

Testing is not required if both equations are true:

$$H_{\text{Candidate}} \leq H_{\text{Original}} + \{(FEI_{\text{sumLimit}} - FEI_{\text{sumOriginal}}) / -0.733\} + (H_{\text{Original}} * R)$$

$$H_{\text{Candidate}} \leq H_{\text{Original}} + \{(FEI2_{\text{Limit}} - FEI2_{\text{Original}}) / -0.246\} + (H_{\text{Original}} * R)$$

Where:

$H_{\text{Candidate}}$ is the HTHS@150°C of the candidate oil as measured by ASTM D4683

H_{Original} is the HTHS@150°C of the original tested oil as measured by ASTM D4683

FEI_{sumLimit} is the FEI sum passing limit for the original tested viscosity grade

$FEI_{\text{sumOriginal}}$ is the FEI sum ($FEI_{\text{Original}} + FEI2_{\text{Original}}$) result of the original tested oil

$FEI2_{\text{Limit}}$ is the FEI2 passing limit for the original tested viscosity grade

$FEI2_{\text{Original}}$ is the FEI2 result of the original tested oil

R is the reproducibility as reported in the most recent version of ASTM D4683. The current $R = 0.03207 \times H_{\text{Original}}$ for ASTM D4683-17.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group II, III and IV base stocks



Sequence IX tests - Table F-15

*For viscosity grades not listed in the table below, bracketing two passing formulations for a given technology may be used to waive additional testing.

VGRA is allowed if the candidate's base oil viscosity at 100°C falls within the range of the base oil viscosity at 100°C of the 2 passing formulations.

Additionally, the viscosity modifier content must be no more than 1.5 times higher than the highest viscosity modifier content in the oils used to support the VGRA bracket. (This approach applies to formulations with base stock Group II, Group III and Group IV.).

Can Be "Read-Across" ⁽³⁾ to:						
Test Run on	OW-16	OW-20	OW-30	5W-20	5W-30	10W-30
OW-16	NA	X	X	X	X	X
OW-20	X	NA	X	X	X	X
OW-30	X	X	NA	X	X	X
5W-20	X	X	X	NA	X	X
5W-30	X	X	X	X	NA	X
10W-30	X	X	X	X	X	NA

Notes:

(1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.

(2) A dash (—) means that read-across is not permitted; NA = not applicable.

(3) Tested formulations containing Group I and/or Group V stocks must contain an equal amount of the same base stock in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group II, III and IV base stocks



Sequence X tests - Table F-16

For viscosity grades not listed in the table below, bracketing two passing formulations for a given technology may be used to waive additional testing.

VGRA is allowed if the candidate's base oil viscosity at 100°C falls within the range of the base oil viscosity at 100°C of the 2 passing formulations.

Additionally, the viscosity modifier content must be no more than 1.5 times higher than the highest viscosity modifier content in the oils used to support the VGRA bracket. (This approach applies to formulations with base stock Group II, Group III and Group IV.).

Can Be "Read-Across" ⁽³⁾ to:							
Test Run on	OW-16	OW-20	5W-20	5W-30	5W-40	10W-30	10W-40
OW-16	NA	X	X	X	X	X	X
OW-20	X	NA	X	X	X	X	X
5W-20	X	X	NA	X	X	X	X
5W-30	X	X	X	NA	X	X	X
5W-40	X	X	X	X	NA	X	X
10W-30	X	X	X	X	X	NA	X
10W-40	X	X	X	X	X	X	NA

Notes:

(1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Standard Group.

(2) A dash (—) means that read-across is not permitted; NA = not applicable.

(3) New viscosity grades and associated read-across are allowed if the requirements described in F.1.3. are met.

(4) BOI/VGRA matrix testing was conducted with oils containing a wide range of viscosity modifier. Oils with zero viscosity modifier were also tested. Oils tested with 2.5 times the amount of viscosity modifier included in the formulation or no viscosity modifier were shown to be statistically no different from the original oil.

(5) Tested formulations containing Group I and/or Group V stocks must contain an equal amount of the same base stock in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



F.4 VGRA for bench tests

F.4.1 HOMOGENEITY AND MISCIBILITY (H & M) (ASTM D6922) and EOFT (ASTM D6795)

These tests are required in the core data set (see ACC Code of Practice for definition of core data set), and then read-across is allowed to all other viscosity grades within the same base stock slate.

F.4.2 EOWTT (ASTM D6794)

This test must be run on the formulation with the highest additive (DI/VI) combination.

Results are then read-across results to all other base oil/viscosity grade formulations using same or lower concentration of the identical additive (DI/VI) combination.

Each different (DI/VI) combination must be tested.

F.4.3 BALL RUST TEST (BRT) (ASTM D6557)

If there is one passing Ball Rust Test (BRT) (ASTM D6557) in the core data set as defined by the ACC Code of Practice, read-across is allowed to all other viscosity grades and base oil slates.

F.4.4 EMULSION RETENTION (ASTM D7563)

For oils formulated with Group II and/or Group III base stocks, the Emulsion Retention ASTM D7563 is required only for the highest additive (DI/VI) concentration.

Read across is allowed to all other Group II, Group III and combinations of Group II and Group III base oil/viscosity grade formulations using the same or lower concentration of the identical additive (DI/VI) combination. If the PPD type is changed for the DI/VI combination, testing is required.

F.4.5 HIGH TEMPERATURE CORROSION BENCH TEST (ASTM D6594)

If there is one passing HTCBT (ASTM D6594) in the core data set as defined by the ACC Code of Practice, read-across is allowed to all other viscosity grades and base oil slates.

TEOST Test (Method 33) - Table F-17

Can Be "Read-Across" to:

Test Run on	5W-20	5W-30	10W-30	10W-40	15W-40	20W-40	20W-50	Mono- Grade
5W-20	NA	X	—	—	—	—	—	—
5W-30	X	NA	X	X	X	X	X	X
10W-30	—	—	NA	X	X	X	X	X
10W-40	—	—	X	NA	X	X	X	X
15W-40	—	—	—	—	NA	X	X	X
20W-40	—	—	—	—	—	NA	X	X
20W-50	—	—	—	—	—	X	NA	X

Notes:

(1) X = read-across is permitted for viscosity grades identified based on data and some application of technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.

(2) Monogrades are defined as SAE 10W, SAE 20W, SAE 30, SAE 40, and SAE 50.

(3) A dash (—) means that read-across is not permitted; NA = not applicable.

(4) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

(5) New viscosity grades and associated read-across are allowed if requirements described in F.1.3 are met.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



TEOST MHT-4 - Table F-18

Can Be "Read-Across" to:													
Test Run on	5W-20	5W-30	10W	10W-30	10W-40	15W-40	15W-50	20W	20W-40	20W-50	30	40	50
5W-20	NA	X	—	X	X	—	—	—	—	—	—	—	—
5W-30	X	NA	—	x	X	—	—	—	—	—	—	—	—
10W	—	—	NA	—	—	—	—	—	—	—	—	—	—
10W-30	X	X	—	NA	X	X	X	—	—	—	—	—	—
10W-40	X	X	—	X	NA	X	X	—	—	—	—	—	—
15W-40	—	—	—	X	X	NA	X	—	—	—	—	—	—
15W-50	—	—	—	X	X	X	NA	—	—	—	—	—	—
20W	—	—	X	—	—	—	—	NA	—	—	—	—	—
20W-40	—	—	—	X	X	X	X	—	NA	X	—	—	—
20W-50	—	—	—	X	X	X	X	—	X	NA	—	—	—
30	—	—	X	—	—	—	—	X	—	—	NA	—	—
40	—	—	X	—	—	—	—	X	—	—	X	NA	—
50	—	—	X	—	—	—	—	X	—	—	X	X	NA

Notes:

- (1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.
- (2) A dash (—) means that read-across is not permitted; NA = not applicable.
- (3) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.
- (4) If the viscosity grade of interest is not in the table, then the TEOST MHT-4 must be run.
- (5) The principles behind this table are that higher base oil viscosity tends to give poorer performance and that VM level is not necessarily detrimental.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



GF-5 Elastomer compatibility test (ASTM D7216 Annex 2A) - Table F-19

For viscosity grades not listed in the table below, bracketing two passing formulations for a given technology may be used to waive additional testing.
VGRA is allowed if the candidate's base oil viscosity at 100°C falls within the range of the base oil viscosity at 100°C of the 2 passing formulations.

Can Be "Read-Across" ⁽³⁾ to:						
Test Run on	0W-20	0W-30	5W-20	5W-30	10W-30	10W-40
0W-20	NA	X	X	X	X	X
0W-30	X	NA	X	X	X	X
5W-20	X	X	NA	X	X	X
5W-30	X	X	X	NA	X	X
10W-30	X	X	X	X	NA	X
10W-40	X	X	X	X	X	NA

Notes:

(1) X = read-across is permitted for the viscosity grades identified based on data and some applications of the technical principles approved by API BOI/VGRA Task Force and API Lubricants Committee.

(2) A dash (—) means that read-across is not permitted; NA = not applicable.

(3) Tested formulations containing Group I and/or Group V stocks must contain an equal amount of the same base stock in the finished oil blend for application of viscosity grade read-across.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Table F-20

Read-across for viscosity grades not covered explicitly by this table are not allowed unless permitted by table F-1.

Performance test	From SAE	To SAE
Caterpillar 1K	10W-40 15W-40 30 40	10W-30, 15W-40, 15W-50 10W-30, 20W-40, 20W-50 10W, 20W, 40, 10W-30, 15W-40, 20W-50 10W, 20W, 30, 10W-30, 15W-40, 20W-50
Caterpillar 1M-PC ^(a)	5W-30 10W-30 10W-40 20W-20 ^(b) 30 40 50 10W 15W-40 15W-50 20W-40 20W-50	All single grades and 5W-20, 10W-30, 10W-40, 15W-40, 15W-50, 20W-40, 20W-50 All single grades and 15W-40, 15W-50, 20W-40, 20W-50 All single grades and 10W-30, 15W-40, 15W-50, 20W-40, 20W-50 All single grades except 10W All single grades except 10W All single grades except 10W All single grades except 10W All single grades All single grades and 20W-40, 20W-50 All single grades and 15W-40, 20W-40, 20W-50 All single grades except 10W and 20W-50 All single grades except 10W and 20W-40
Caterpillar 1N	15W-40 20W-20 ^(b) 30 40 50	10W-30, 20W-40, 20W-50 10W 10W, 20W-20 ^(b) 10W, 20W-20 ^(b) , 30 10W, 20W-20 ^(b) , 30, 40
Caterpillar 1P	10W-30 10W-40 15W-40 15W-50	15W-40, 20W-40, 20W-50 10W-30, 15W-40, 15W-50, 20W-40, 20W-50 20W-40, 20W-50 15W-40, 20W-40, 20W-50
Caterpillar 1R	10W-30 10W-40	15W-40 10W-30, 15W-40, 15W-50
Caterpillar C13	10W-30 10W-40 15W-50	15W-40 10W-30, 15W-40 15W-40

Notes:

(1) This table originally became effective January 1, 1992. Engine manufacturers may not recommend all of the viscosity grades shown in the table for a particular engine type.

(2) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.

(a) No 0W and 5W single grades were considered for this table. 1M-PC read-across guidelines effective December 1, 2002.

(b) These read across also apply to SAE 20 and SAE 20W monograde oils.

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Table F-20

Read-across for viscosity grades not covered explicitly by this table are not allowed unless permitted by table F-1.

Performance test	From SAE	To SAE
Corrosion Bench Test (CBT)	10W-30	15W-40
COAT	15W-40 10W-40	10W-30, 10W-40 10W-30
Elastomer Compatibility	10W-30 15W-40	15W-40 10W-30
High Temperature Corrosion Bench Test (HTCBT)	See F.4.5	
Mack M11HST	10W-30 15W-40	10W-40, 15W-40, 15W-50 10W-40, 15W-50
Mack M11EGR	10W-30 15W-40	10W-40, 15W-40, 15W-50 10W-40, 15W-50
Cummins ISB	10W-30 15W-40	10W-40, 15W-40, 15W-50 10W-40, 15W-50
Cummins ISM	10W-30 15W-40	10W-40, 15W-40, 15W-50 10W-40, 15W-50
Cummins NTC-400	15W-40 20W-50 30 40	10W-30, 20W-50 ^(c) 10W-30, 15W-40 10W, 20W, 10W-30, 15W-40, 20W-50 10W, 20W, 30, 10W-30, 15W-40, 20W-50
Detroit Diesel 6V 92TA	10W-XX ^(d) 10W-30 15W-XX ^(d) 15W-40 20W-XX ^(d) 30 40	15W-XX ^(d) , 20W-XX ^(d) , 30, 40, 50 15W-40, 20W-50, 30, 40, 50 20W-XX ^(d) , 30, 40, 50 20W-50, 30, 40, 50 30, 40, 50 40, 50 50
Navistar Engine Oil Aeration Test (EOAT)	10W 10W-30 15W-40 15W-50 40	10W-30, 15W-40, 15W-50 10W, 15W-40, 15W-50 10W, 10W-30, 15W-50 10W, 10W-30, 15W-40 10W, 30, 10W-30, 15W-40, 15W-50
Roller Follower Wear Test	10W-30 15W-40	10W-40, 15W-40, 15W-50, 20W-40, 20W-50, 30, 40, 50 15W-50, 20W-40, 20W-50, 40, 50

Notes:

- (1) This table originally became effective January 1, 1992. Engine manufacturers may not recommend all of the viscosity grades shown in the table for a particular engine type.
(2) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.
(c) 20W-50 must contain no more bright stock than the 15W-40.
(d) Provided the XX for "Grade Tested" is less than or equal to XX of the multigrade oil for "Read Across to."

API 1509 engine oil licensing and certification system guidelines: viscosity grades read across requirements for formulations containing Group I, II, III and IV base stocks



Table F-20

Read-across for viscosity grades not covered explicitly by this table are not allowed unless permitted by table F-1.

Performance test	From SAE	To SAE
Mack T-6 ^(a)	10W-30 15W-40 20W-50 30	15W-40, 20W-50 10W-30, 20W-50 10W-30, 15W-40 10W, 20W, 40, 10W-30, 15W-40, 20W-50
Mack T-7 ^(f)	10W-30 15W-40 20W-50 30	15W-40, 20W-50 10W-30, 20W-50 10W-30, 15W-40 10W, 20W, 40, 10W-30, 15W-40, 20W-50
Mack T-8, Mack T-8A and Mack T-8E ^(f)	15W-40	10W-30, 10W-40, 15W-50
Mack T-9 ^(a)	10W-30 15W-40	10W-40, 15W-40, 15W-50, 20W-40 (h), 20W-50 ^(b) 15W-50, 20W-40 (h), 20W-50 (h)
Mack T-10	10W-30 15W-40	10W-40, 15W-40, 15W-50, 20W-40 ^(b) , 20W-50 ^(b) 15W-50, 20W-40 ^(b) , 20W-50 ^(b)
Mack T-10A	15W-40	0W-XX, 5W-XX, 10W-XX
Mack T11 ^(a)	10W-30 10W-40 15W-40 15W-50 20W-40 20W-50	10W-40 10W-30 10W30, 10W-40, 15W-50 10W-30, 10W-40, 15W-40 10W-30, 10W-40, 15W-40, 15W-50, 20W-50 10W-30, 10W-40, 15W-40, 15W-50, 20W-40
Mack T-11A	15W-40	0W-XX, 5W-XX, 10W-XX
Mack T-12	10W-30 15W-40	10W-40, 15W40, 15W50, 20W-40 ^(b) , 20W-50 ^(b) 15W-50, 20W-40 ^(b) , 20W-50 ^(b)
Mack T-12A	15W-40	0W-XX, 5W-XX, 10W-XX
Mack T-13	10W-30 10W-40 15W-40	10W-40, 15W-40 10W-30, 15W-40 10W-30, 10W-40

Notes:

- (1) This table originally became effective January 1, 1992. Engine manufacturers may not recommend all of the viscosity grades shown in the table for a particular engine type.
- (2) Tested formulations containing Group V stocks must contain an equal amount of the same Group V base stock (e.g., ester) in the finished oil blend for application of viscosity grade read-across.
- (e) ACF-4 test program with T-9 data to validate engine wear performance must use the T-6 viscosity grade read across guidelines.
- (f) A CF-4 test program with T-8A or T-8E data to validate soot handling performance must use the T-7 viscosity grade read across guidelines.
- (g) Base oil saturates in the test and final formulations must comply with the guidelines in E.3.1.9, and in cases where a dispersant viscosity modifier (DVM) is used, the DVM level in the final formulation must be equal to or greater than the level in the test oil.
- (h) Provided the saturates level in the new candidate oil is equal to or greater than the original candidate oil and the sulfur level is equal to or less than that of the original candidate oil within the precision of the tests.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



Interchange for passenger car motor oils - Appendix E.2

E.2.1 GUIDELINES

- E.2.1.1** Based on existing engine test data submitted to API, the passing engine tests specified in Section E.2 are required for interchanging the base stock in an original API-Licensed PCMO.
- E.2.1.2** In any case where base stocks of more than one group are interchanged simultaneously, the most severe testing requirement applies.
- E.2.1.3** Engine testing is not required when a single interchange base stock that meets the definition of Group I, Group II, Group III, or Group IV is used at less than or equal to 10 mass percent of the blended PCMO formulation. In some cases, higher percentages of Group III or Group IV may be substituted without further engine testing as specified in Appendix E, or in the ACC Code (Appendix I, Guideline 5). The ACC Code should be followed for Group V.
- E.2.1.4** The PCMO blended with the interchange base stock shall meet all physical and chemical specifications and bench test requirements for the appropriate API Service Category and/or ILSAC specification.
- E.2.1.5** Base stocks approved under the provisions of these Guidelines may be commingled without further testing, consistent with provisions of Appendix F.
- E.2.1.6** Acceptable test methods for base stock and base oil blend properties are listed in Table E-1. It is understood that when comparing properties, the precision of the methods is taken into consideration. In the following tables, BOBV refers to the Base Oil Blend Viscosity measured by ASTM D445.
- E.2.1.7** For engine oils licensed by API against the ILSAC GF-5 standard, the licensee shall ensure that the ROBO or IIIGA data supporting the final formulation was produced in a formulation containing the pour point depressant and base stock(s) used in the licensed formulation.
- E.2.2.1** API recognizes the importance of the Multiple Test Evaluation Procedures. Engine testing to support base oil interchangeability shall be in accordance with Appendix N. These Guidelines shall be used in conjunction with the ACC Code.
- E.2.2.2** Complete performance documentation is required for the original Passenger Car Motor Oils (PCMO). The detergent inhibitor (DI) and/or viscosity modifier (VM) remain unchanged when interchange base oils are tested, except as provided by the ACC Code. A base oil interchange obtained under these guidelines applies to a single PCMO formulation. In the event of a change in the DI and/or VM outside the ACC Code, these Guidelines shall be reapplied.

Interchange for passenger car motor oils - Appendix E.2

Property	Test Method
Saturates	ASTM D2007
Viscosity Index	ASTM D2270
Sulfur (use one listed method)	ASTM D1552 ASTM D2622 ASTM D3120 ASTM D4294 ASTM D4927

Notes:
The most recent version of each of the listed standards shall be used.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.3 For the passenger car tests listed in Table E-2, these Guidelines may allow some testing relief. Check the Guidelines for each specific test before establishing the test program requirements for a specific oil formulation.

Table E-2 - Tests for API S category base oil interchange

Test Name	ASTM	Appendix E Reference	SH	SJ	SL	SM	SN	SP	Resource Conserving	SN PLUS	ILSAC GF-5	ILSAC GF-6A	ILSAC GF-6B
Sequence IID	D5244	E.4.6	X	X									
Sequence IIIE	D5533	E.2.2.4.1	X	X									
Sequence IIIF	D6984	E.2.2.4.1	X	X	X								
Sequence IIIG/IIIGA/IIIGB	D7320	E.2.2.4.1			X	X	X		X		X		
Sequence IIIH/IIIIHA/IIIIHB	D8111	E.2.2.4.2				X	X	X	X		X	X	X
Sequence IVA	D6891	E.2.2.4.3	X	X	X	X	X				X		
Sequence IVB	DXXXX	E.2.2.4.4						X				X	X
Sequence VE	D5302	E.2.2.4.5	X	X	X								
Sequence VG	D6593	E.2.2.4.5	X	X	X	X	X				X		
Sequence VH	DXXXX	E.2.2.4.6	X	X	X	X	X	X			X	X	X
Sequence VID	D7589	E.2.2.4.7							X		X		
Sequence VIE	D8114	E.2.2.4.8	X	X	X	X	X	X	X		X	X	
Sequence VIF	D8226	E.2.2.4.9					X	X	X				X
CRC L-38	D5119	E.2.2.4.10	X	X									
Sequence VIII	D6709	E.2.2.4.10	X	X	X	X	X	X			X	X	
Sequence IX	DXXXX	E.2.2.4.11						X		X		X	X
Sequence X	DXXXX	E.2.2.4.12						X				X	X
Ball Rust Test	D6557	E.4.6	X	X	X	X	X	X			X	X	X
EOFT	D6795	E.4.4	X	X	X	X	X	X			X	X	X
Filterability - EOWTT	D6794	E.4.5		X	X	X	X	X			X	X	X
Homogeneity & Miscibility	D6922	E.4.4	X	X	X	X	X	X			X	X	X
TEOST 33/33C	D6335	E.4.2		X				X			X	X	
TEOST MHT	D7097	E.4.3			X	X	X				X		
Aged Oil Low Temp. Vis. ROBO	D7528	E.2.1.7					X	X			X	X	X
Elastomer Compatibility Std. Ref. Elastomers	D7216	E.4.13						X	X		X	X	X

Notes:

X = Test methods where BOI is defined. Testing requirements can be found in API 1509 Appendixes G and Q and/or ASTM D4485.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.4.1 Sequence IIIE / IIIF / IIIFHD / IIIG and IIIGA tests required for interchanging the base stock ⁽²⁾ - Table E-4

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group II	Required	Required	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group III	Required	Required	Required	≤30% Not Required, >30% Required	Required
Group IV	Required	Required	≤30% Not Required, >30% Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

(2) Single Technology Matrix (STM) is an alternate approach to BOI for Sequence IIIF, IIIFHD, IIIG and IIIGA (see appendix R).

Additionally, once five passing IIIGB tests have been demonstrated on a unique technology (A Unique Technology is a single package (DI) at a constant treat rate), then no additional Sequence IIIGB testing is required for that unique technology.

E.2.2.4.2 Sequence IIIB and IIIBB tests required for interchanging the base stock - Table E-5

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	≤30% Not Required, >30% Required	Required	Required
Group II	Required	Required	≤30% Not Required, >30% Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.4.3 Sequence IVA tests required for interchanging the base stock - Table E-6

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur $\leq$ and saturates $\geq$ original	Not Required	Not Required	$\leq 50\%$ Not Required, $> 50\%$ Required	Required
Group II	Required	Not Required if saturates $\geq$ original	Not Required	$\leq 50\%$ Not Required, $> 50\%$ Required	Required
Group III	Required	Required	Not Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.2.2.4.4 Sequence IVB tests required for interchanging the base stock - Table E-7

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required if BOBV at 100°C $\geq$ original	Not Required if BOBV at 100°C $\geq$ original	Required	Required
Group III	Required	Not Required if BOBV at 100°C $\geq$ original	Not Required if BOBV at 100°C $\geq$ original	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

(2) The guidelines in this table were developed from data generated on oils with Viscosity Grades from SAE 0W-16 to SAE 20W-50.

These do not restrict applications of the guidelines by the marketer that is responsible for ensuring that each licensed engine oil satisfies all engine and bench test performance requirements.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.4.5 Sequence VE / VG tests required for interchanging the base stock - Table E-8

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur $\leq$ and saturates $\geq$ original	Not Required	Not Required	$\leq 50\%$ Not Required, $> 50\%$ Required	Required
Group II	Required	Not Required if saturates $\geq$ original	Not Required	$\leq 50\%$ Not Required, $> 50\%$ Required	Required
Group III	Required	Required	Not Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.2.2.4.6 Sequence VH tests required for interchanging the base stock - Table E-9

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if the condition in footnote ⁽¹⁾ is fulfilled	Not Required if BOBV at 100°C $\geq$ original	Not Required if BOBV at 100°C $\geq$ original	Required	Required
Group II	Not Required if BOBV at 100°C $\geq$ original and candidate base oil saturates by ASTM D2007 $\geq 83\%$ and sulfur $\leq 0.13\%$	Not Required if BOBV at 100°C $\geq$ original	Not Required if BOBV at 100°C $\geq$ original	Required	Required
Group III	Not Required if BOBV at 100°C $\geq$ original and candidate base oil saturates by ASTM D2007 $\geq 83\%$ and sulfur $\leq 0.13\%$	Not Required if BOBV at 100°C $\geq$ original	Not Required if BOBV at 100°C $\geq$ original	Required	Required
Group IV	Required	$< 50\%$ Not Required if BOBV at 100°C $\geq$ original, $\geq 50\%$ Required	$< 50\%$ Not Required if BOBV at 100°C $\geq$ original, $\geq 50\%$ Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required if BOBV at 100°C $\geq$ original and both original and candidate base oil saturates by ASTM D2007 $\geq 83\%$ and sulfur $\leq 0.13\%$; or Not required if BOBV at 100°C $\geq$ original when original base oil saturates by ASTM D2007 $< 83\%$ and sulfur $> 0.13\%$ and candidate oil saturates $\geq$ original and candidate oil sulfur $\leq$ original.

(2) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.4.7 Sequence VID tests required for interchanging the base stock - Table E-10

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required if HTHS at 100°C(D6616) ≤ original. If HTHS at 100°C > the original, see Equations E.1.0		Required	Required
Group III	Required			Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Equation E.1.0

If HTHS at 100°C of the candidate oil is > the HTHS at 100°C of the original passing oil, testing is not required if both equations are true:

$$HCandidate \leq HOriginal + ((FEIsumLimit - FEIsumOriginal) / -0.485) + (HOriginal * R)$$

$$HCandidate \leq HOriginal + ((FEI2Limit - FEI2Original) / -0.227) + (HOriginal * R)$$

Where:

HCandidate is the HTHS at 100°C of the candidate oil as measured by ASTM D6616
HOriginal is the HTHS at 100°C of the original tested oil as measured by ASTM D6616
FEIsumLimit is the FEI sum passing limit for the original tested viscosity grade
FEIsumOriginal is the FEIsum (FEI1Original + FEI2Original) result of the original tested oil
-0.485 is the FEIsum coefficient from the Seq. VID industry matrix model
FEI2Limit is the FEI2 passing limit for the original tested viscosity grade
FEI2Original is the FEI2 result of the original tested oil
-0.227 is the FEI2 coefficient from the Seq. VID industry matrix model
R is the reproducibility as reported in the most recent version of ASTM D6616
R = 0.035 (3.5%) for ASTM D6616-07

The range of HTHS at 100°C used to develop the Seq. VID industry matrix model was 5.44 to 7.68 cP.

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.4.8 Sequence VIE tests required for interchanging the base stock - Table E-11

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required if HTHS at 150°C ≤ original. If HTHS at 150°C > the original, see equation below		Required	Required
Group III	Required			Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Equation E.10

If HTHS at 150°C of the candidate oil is > the HTHS at 150°C of the original passing oil, testing is not required if both equations are true:

$$HCandidate \leq HOriginal + ((FEIsumLimit - FEIsumOriginal) / -0.733) + R$$

$$HCandidate \leq HOriginal + ((FEI2Limit - FEI2Original) / -0.246) + R$$

Where:

HCandidate is the HTHS at 150°C of the candidate oil as measured by ASTM D4683

HOriginal is the HTHS at 150°C of the original tested oil as measured by ASTM D4683

FEIsumLimit is the FEI sum passing limit for the original tested viscosity grade

FEIsumOriginal is the FEIsum (FEI1Original + FEI2Original) result of the original tested oil

FEI2Limit is the FEI2 passing limit for the original tested viscosity grade

FEI2Original is the FEI2 result of the original tested oil

R is the reproducibility as reported in the most recent version of ASTM D6616

R = 0.03207 x HOriginal + 0.0389 for ASTM D4683-17

-0.733 and -0.246 are coefficients from the Seq VIE industry matrix model

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.4.9 Sequence VIF tests required for interchanging the base stock - Table E-12

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Required	Required	Not Required	Required
Group III	Required	Required	Not Required if base oil VI of candidate $\geq$ original test oil	Not Required	Required
Group IV	Required	Required		Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.2.2.4.10 Sequence VIII / CRC L-38 tests required for interchanging the base stock⁽²⁾⁽³⁾ - Table E-13

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Not Required	Not Required	Required
Group II	Not Required	Not Required	Not Required	Not Required	Required
Group III	Not Required	Not Required	Not Required	$\leq 30\%$ Not Required, >30% Required	Required
Group IV	Required	Required	$\leq 30\%$ Not Required, >30% Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Viscosity Grade	L-38/Sequence VIII 10 hr Stripped Kinematic Viscosity@100 °C (mm ² /s), min	ASTM D6278 (30 Passes) Kinematic Viscosity@100 °C (mm ² /s), min
XW-16	6,1	5,8
XW-20	6,9	6,5
XW-30	9,3	8,5
XW-40	12,5	11,5
XW-50	16,3	15,0
XW-60	21,9	19,8

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

(2) These BOI Guidelines apply only to bearing weight loss.

(3) Data to support stay-in-grade performance shall be maintained by the licensee for active API Service Categories and ILSAC specifications. Either CRC L-38/Sequence VIII or ASTM D6278 (30 passes) may be used to support stay-in-grade requirements where the limits are listed in Table E-13.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for passenger car motor oils



E.2.2.4.11 Sequence IX tests required for interchanging the base stock - Table E-15

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Not Required	Not Required	Required
Group III	Required	Not Required	Not Required	Not Required	Required
Group IV	Required	Not Required	Not Required	Not Required	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) The guideline in this table were developed from data generated on oil with Viscosity Grades from SAE 0W-16 to SAE 10W-30. It does not restrict application of the guidelines by the marketer that is responsible for ensuring that each licensed engine oil satisfies all engine and bench test performance requirements.

E.2.2.4.12 Sequence X tests required for interchanging the base stock - Table E-16

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Not Required	Not Required	Required
Group III	Required	Not Required	Not Required	Not Required	Required
Group IV	Required	Not Required	Not Required	Not Required	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) The guideline in this table were developed from data generated on oil with Viscosity Grades from SAE 0W-16 to SAE 10W-40. It does not restrict application of the guidelines by the marketer that is responsible for ensuring that each licensed engine oil satisfies all engine and bench test performance requirements.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



Interchange for diesel engine oils - Appendix E.3

E.3.1 GUIDELINES

E.3.1.1 Based on existing engine test data submitted to API, passing engine tests specified in Section E.3 are required for interchanging the base stock in an original API-Licensed Heavy Duty Engine Oil (HDEO).

E.3.1.2 In any case where base stocks of more than one group are interchanged simultaneously, the most severe testing requirement applies.

E.3.1.3 Engine testing is not required when a single interchange base stock that meets the definition of Group I, Group II, Group III, or Group IV is used at less than or equal to 10 mass percent of the blended HDEO formulation. In some cases, higher percentages of Group III or Group IV may be substituted without further engine testing as specified in Appendix E or in the ACC Code (Appendix I, Guideline 5). The ACC Code should be followed for Group V.

E.3.1.4 The HDEO blended with the interchange base oil shall meet all physical and chemical specifications required for the appropriate API Service Category.

E.3.1.5 Base stocks approved under the provisions of these Guidelines may be commingled without further testing, consistent with Appendix F.

E.3.1.6 Acceptable test methods for base stock and base oil blend properties are listed in Table E-1. It is understood that when comparing properties, the precision of the methods is taken into consideration. In the following tables, BOBV refers to the Base Oil Blend Viscosity measured by ASTM D445.

E.3.2.1 API recognizes the importance of the Multiple Test Evaluation Procedures. Engine testing to support base oil interchangeability shall be in accordance with Appendix N. These Guidelines shall be used in conjunction with the ACC Code.

E.3.2.2 Complete performance documentation is required for the original HDEO's. The detergent inhibitor (DI) and/or viscosity modifier (VM) remain unchanged when interchange base oils are tested, except as provided by the ACC Code. A base oil interchange obtained under these guidelines applies to a single HDEO formulation. In the event of a change in the DI and/or VM outside the ACC Code, these Guidelines shall be reapplied.

E.3.2.3 When a base stock or slate of base stocks is to be changed in a number of different viscosity grades containing a single HDEO formulation, these Guidelines shall be used in conjunction with appendix F, except when the recommended grade for testing contains less than or equal to 10 mass percent of the interchange base stock in the formulation. In this case, the next higher viscosity grade shall be tested.

E.3.2.5 Heavy Duty engine tests required for interchanging the base stock given in E.3.2.5.1 through E.3.2.5.16. The BOI Guidelines vary according to the API base oil group and amount of the base stocks used in the original test oil and the candidate oil formulations. All percentages are mass percent of the total formulation unless otherwise noted.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.4 For the HDEO tests listed in Table E-16, the BOI Guidelines may allow some testing relief.
Check the Guidelines for each specific test before establishing the test program requirements for a specific oil formulation.

Table E-17 - Tests for API C category base oil interchange

Test Name	ASTM	Appendix E Reference	CF	CF-2	CG-4	CH-4	CI-4	CI-4 w/ CI-4 PLUS	CJ-4	CK-4/FA-4
Sequence IIIF / IIIFHD	D6984	E.2.2.4.1			X	X	X	X	X	
Sequence IIIG	D7320	E.2.2.4.1			X	X	X	X	X	
CRC L-38	D5119	E.2.2.4.5	X	X	X					
Sequence VIII	D6709	E.2.2.4.5	X	X	X					
Caterpillar 1M-PC	D6618	E.3.2.5.1	X	X						
Caterpillar CI3	D7549	E.3.2.5.16							X	X
Caterpillar 1K	D6750 (1K)	E.3.2.5.3				X	X	X		
Caterpillar 1N	D6750 (1N)	E.3.2.5.4			X		X	X	X	X
Caterpillar 1P	D6681	E.3.2.5.6				X	X	X		
Caterpillar 1R	D6923	E.3.2.5.5					X	X		
Caterpillar Oil Aeration Test	D8047	E.3.2.5.16								X
Engine Oil Aeration Test	D6894	E.3.2.5.11			X	X	X	X	X	
Cummins ISM	D7468	E.3.2.5.13					X	X	X	X
Cummins ISB	D7484	E.3.2.5.13							X	X
Cummins M11	D6838	E.3.2.5.12				X				
Cummins M11 EGR	D6975	E.3.2.5.12					X	X		
Detroit Diesel 6V92TA	D5862	E.3.2.5.2		X						
Mack T-8	D5967	E.3.2.5.8			X					
Mack T-8E	D5967	E.3.2.5.8				X	X	X		
Mack T-9	D6483	E.3.2.5.7				X				
Mack T-10	D6987/M	E.3.2.5.9				X	X	X		
Mack T-10A	75h used oil in D4684	E.4.7					X	X		
Mack T-11	D7156	E.3.2.5.15						X	X	X
Mack T11A	D6896	E.4.10						X	X	X
Mack T-12	D7422	E.3.2.5.14					X	X	X	X
Volvo T-13	D8048	E.3.2.5.15								X
Roller Follower Wear Test	D5966	E.3.2.5.10			X	X	X	X	X	X
Cummins HTCBT	D6594	E.4.11				X	X	X	X	X
Elastomer Compatibility CI-4	D7216	E.4.8					X	X		
Elastomer Compatibility CJ-4	D7216	E.4.9							X	

Notes:

X = Test methods where BOI is defined. Testing requirements can be found in API 1509 Appendixes G and Q and/or ASTM D4485.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



Caterpillar 1M-PC tests required for interchanging the base stock (API 1509 March 2015 version)

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required, ≤30% Not Required for API CF if candidate oil also meets API SJ	Required
Group II	Not Required	Not Required	Required	Required, ≤30% Not Required for API CF if candidate oil also meets API SJ	Required
Group III	Required	Required	Not Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

Detroit Diesel 6V92TA tests required for interchanging the base stock (API 1509 March 2015 version)

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if BOBV at 100°C ≥ original	Not Required if BOBV at 100°C ≥ original	Required	Required	Required
Group II	Not Required if BOBV at 100°C ≥ original	Not Required if BOBV at 100°C ≥ original	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties AND the BOBV @ 100°C is ≥ the BOBV in the originally approved formulation.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.1 Caterpillar 1K tests required for interchanging the base stock - Table E-19

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group II	Not Required	Not Required	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.3.2.5.2 Caterpillar 1N tests required for interchanging the base stock - Table E-20

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Required	Required	Required
Group II	Not Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.3 Caterpillar 1R tests required for interchanging the base stock - Table E-21

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Required	Required	Required
Group II	Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.3.2.5.4 Caterpillar 1P tests required for interchanging the base stock - Table E-22

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Required in only one Group II base stock for CH-4, Not Required for CI-4	Required	Required	Required
Group II	Not Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.5 Mack T-9 tests required for interchanging the base stock - Table E-23

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur $\leq$ and saturates $\geq$ original	Not Required	$\leq 30\%$ Not Required, >30% Required	$\leq 30\%$ Not Required, >30% Required	Required
Group II	Required	Not Required if saturates $\geq$ original	$\leq 30\%$ Not Required, >30% Required	$\leq 30\%$ Not Required, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.3.2.5.6 Mack T-8 / T-8E tests required for interchanging the base stock - Table E-24

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if either of the following is met: 1. Saturates of original is $\geq 80\%$ and interchange base oil saturates is $\geq$ original 2. Saturates of original is < 80% and interchange base oil saturates is $\geq$ original at 95% confidence level	Not Required	Not Required	Not Required	Required
Group II	Required	Not Required if saturates $\geq$ original	Not Required	Not Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.7 Mack T-10 tests required for interchanging the base stock - Table E-25

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur $\leq$ AND saturates $\geq$ AND BOBV at 100°C $\geq$ original	Not Required if saturates $\geq$ AND BOBV at 100°C $\geq$ original	$\leq$ 30% Not Required if saturates $\geq$ AND BOBV at 100°C $\geq$ original, >30% Required	$\leq$ 30% Not Required if saturates $\geq$ AND BOBV at 100°C $\geq$ original, >30% Required	Required
Group II	Required	Not Required if saturates $\geq$ AND BOBV at 100°C $\geq$ original	$\leq$ 30% Not Required if saturates $\geq$ AND BOBV at 100°C $\geq$ original, >30% Required	$\leq$ 30% Not Required if saturates $\geq$ AND BOBV at 100°C $\geq$ original, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.3.2.5.8 RFWTs tests required for interchanging the base stock - Table E-26

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	$\leq$ 30% Not Required, >30% Required	$\leq$ 30% Not Required, >30% Required	Required
Group II	Required in only one Group I base stock	Not Required	$\leq$ 30% Not Required, >30% Required	$\leq$ 30% Not Required, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.9 EOATs tests required for interchanging the base stock - Table E-27

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group II	Not Required	Not Required	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties

E.3.2.5.10 Cummins M11 / M11 EGR tests required for interchanging the base stock - Table E-28

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur ≤ and saturates ≥ original	Not Required	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group II	Required	Not Required if saturates ≥ original	≤30% Not Required, >30% Required	≤30% Not Required, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.11 Cummins ISM and ISB tests required for interchanging the base stock - Table E-29

If only one passing Cummins ISM or ISB test is available on a given technology, Table E-29 applies.

If more than one passing Cummins ISM or ISB test is available on a given technology, BOI is allowed if the candidate's base oil blend saturates level, sulfur content and BOBV at 100°C fall within the range of saturates, sulfur and BOBV at 100°C of the base oil blends in the original passing oils with a minimum of two tested/two passed and the Group III content of the candidate falls within the range of the Group III content covered by the original passing oils.

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur $\leq$ and saturates $\geq$ original	Not Required	$\leq$ 30% Not Required, >30% Required	$\leq$ 30% Not Required, >30% Required	Required
Group II	Required	Not Required if saturates $\geq$ original	$\leq$ 30% Not Required, >30% Required	$\leq$ 30% Not Required, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.3.2.12 Mack T-12 tests required for interchanging the base stock - Table E-30

If only one passing Mack T-12 test is available on a given technology, Table E-30 applies.

If more than one passing Mack T-12 test is available on a given technology, BOI is allowed if the candidate's base oil blend saturates level, sulfur content and BOBV at 100°C fall within the range of saturates, sulfur and BOBV at 100°C of the base oil blends in the original passing oils with a minimum of two tested/two passed and the Group III content of the candidate falls within the range of the Group III content covered by the original passing oils.

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur $\leq$ and saturates $\geq$ and BOBV at 100°C $\geq$ original	Not Required if saturates $\geq$ and BOBV at 100°C $\geq$ original	$\leq$ 30% Not Required if saturates $\geq$ and BOBV at 100°C $\geq$ original, >30% Required	$\leq$ 30% Not Required if saturates $\geq$ and BOBV at 100°C $\geq$ original, >30% Required	Required
Group II	Required	Not Required if saturates $\geq$ and BOBV at 100°C $\geq$ original	$\leq$ 30% Not Required if saturates $\geq$ and BOBV at 100°C $\geq$ original, >30% Required	$\leq$ 30% Not Required if saturates $\geq$ and BOBV at 100°C $\geq$ original, >30% Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.13 Mack T-11 tests required for interchanging the base stock - Table E-31

Base Oil Interchange for all Mack T-11 engine tests started after April 28, 2006, may be determined using the method provided in Tables E-31 or E-32 or Figure E-1. Tables E-31 and E-32 and Figure E-1 all define the minimum saturates content of the candidate oil that can be interchanged from the original test oil.

Table E-31 Mack T-11 BOI Saturates Requirements (within a range)

Tested Oil	Candidate Oil
$X \leq 70.0$	80.0 minimum
$70.0 < X < 95.0$	$(0.6 \cdot X + 38)$ minimum
$X \geq 95.0$	95.0 minimum

E.3.2.5.14 Caterpillar C13 tests required for interchanging the base stock

If only one passing Caterpillar C13 test is available on a given technology and only Group II and/or Group III base stocks are present in the passing C13 oil and the candidate, then C13 BOI is allowed if the candidate's base oil blend viscosity index (VI) is equal to or less than the VI of the base oil blend of the passing C13 oil. If Group I base stock is present in either the passing C13 oil or the candidate, then C13 BOI is allowed if the base oil blend of the candidate has the same saturates level, the same or less sulfur and the same or lower VI than the base oil blend of the passing C13 oil. Additional guidelines apply when Group III base stock is present in the C13 passing oil:

- a. The candidate oil must have Group III content equal to or less than the passing oil.
- b. The typical VI of the Group III in the candidate must be no more than 6 units higher than the typical VI of the Group III in the passing C13 oil with no allowance for test precision.

Group IV base stocks can be interchanged provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties. When Group V base stocks are present, the C13 test must be run.

If more than one passing Caterpillar C13 test is available on a given technology, BOI is allowed if the candidate's base oil blend saturates level, sulfur content and viscosity index fall within the range of saturates level, sulfur, and VI of the base oil blends in the original passing oils (minimum two tested/two passed oils) and the Group III content of the candidate oil falls within the range of the Group III content covered by the original passing oils. Additionally, the typical VI of the Group III in the candidate oil must be no more than 6 units higher than the typical VI of the Group III in the passing C13 oil with no allowance for test precision.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.3.2.5.15 Volvo T-13 tests required for interchanging the base stock - Table E-33

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

E.3.2.5.16 Caterpillar Oil Aeration tests required for interchanging the base stock - Table E-34

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Required	Required	Required	Required	Required
Group II	Required	Not Required	Required	Required	Required
Group III	Required	Required	Required	Required	Required
Group IV	Required	Required	Required	Not Required ⁽¹⁾	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Not required provided the interchange Group IV meets the original manufacturer's specifications in all physical and chemical properties.

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



Complete bench testing is required for interchanging a base stock in an API-licensed oil except where noted in the guidelines below.

E.4.2 TEOST 33 tests required for interchanging the base stock - Table E-35

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required	Not Required	Required	Required	Required
Group II	Not Required	Not Required	Not Required	Required	Required
Group III	Required	Not Required	Not Required	Required	Required
Group IV	Required	Required	Required	Required	Required
Group V	Required	Required	Required	Required	Required

Notes:

(1) Applies to 5W-30 and high viscosity grades only.

E.4.3 TEOST MHT tests required for interchanging the base stock - Table E-36

Base stock in original test oil	Interchange base stock				
	Group I	Group II	Group III	Group IV	Group V
Group I	Not Required if sulfur $\geq$ and saturates $\leq$ original	Required	Required	Required	Required
Group II	Not Required	Not Required	Not Required	Required	Required
Group III	Required	Not Required	Required	Required	Required
Group IV	Required	Required	Required	Required	Required
Group V	Required	Required	Required	Required	Required

API 1509 engine oil licensing and certification system guidelines: API base oil interchangeability guidelines for diesel engine oils



E.4.4 Homogeneity and Miscibility (H&M) ASTM D6922 and Engine Oil Filterability (EOFT) ASTM D6795 [formerly known as GM 9099P Filterability (Standard Method)] tests are required in one viscosity grade represented in the core data set. Each base oil interchange requires only one H&M and one EOFT test. (See ACC Code for definition of core data set.) Core data sets are typically developed in SAE 5W-30, 10W-30, 10W-40 or 15W-40 viscosity grades.

E.4.5 The Engine Oil Water Tolerance Test (EOWTT) ASTM D6794 [formerly GM 9099P Filterability (Modified Method for ILSAC GF-2/GF-3)] for each base oil interchange is required only in the viscosity grade with the highest additive (DI/VI) combination.

E.4.6 If there is one passing Ball Rust Test (BRT) ASTM D 6557 in the core data set as defined by the ACC Code, read-across is allowed to all other viscosity grades and base oil slates.

E.4.7 A Mack T-10A or Mack T-12A test is not required for base oil interchange if the saturates and sulfur content (within the precision of the two analytical tests) of the interchange base oil fall within the range of the saturates and sulfur content of the base oils in the original candidate oils (minimum two candidate oils), and fresh oil MRV-TP1 (ASTM D 4684) at -20°C of the interchange candidate is equal to or less than the BOI matrix limit.

The BOI matrix limit is defined as:

BOI matrix limit = 25000 - margin of safety

Margin of safety is defined as:

Margin of safety = largest of Y1-X1, Y2-X2, or 0

where

X1 = fresh oil MRV-TP1 at -20°C for original candidate oil 1

X2 = fresh oil MRV-TP1 at -20°C for original candidate oil 2

Y1 = MRV-TP1 at -20°C of 75-hour T-10A or T-12A sample for original candidate oil 1

Y2 = MRV-TP1 at -20°C of 75-hour T-10A or T-12A sample for original candidate oil 2

E.4.8 The CI-4 Elastomer Compatibility Test is not required if the saturates and sulfur content (within the precision of the tests) of the interchange base oil fall within the range of the saturates and sulfur content of the base oils in the original candidate oils (minimum two candidate oils) and the DI package is unchanged.

E.4.9 The CJ-4 Elastomer Compatibility Test is not required if the saturates and sulfur content (within the precision of the tests) of the interchange base oil fall within the range of the saturates and sulfur content of the base oils in the original candidate oils (minimum two candidate oils) and the DI package is unchanged.

E.4.10 In addition to the Mack T-11 BOI guidelines being met, for Base Oil Interchange in the Mack T-11A the fresh oil MRV-TP1 (ASTM D 4684) at -20°C of the interchange candidate must be less than or equal to 20000 cPs with no yield stress.

E.4.11 If there is one passing High-Temperature Corrosion Bench Test (HTCBT) (ASTM D 6594) in the core data set as defined by the ACC Code, read-across is allowed to all other viscosity grades and base oil slates.

E.4.12 For oils formulated with Group II and/or Group III base stocks, the Emulsion Retention ASTM D7563 is required only for the highest additive (DI/VI) concentration. Read across is allowed to all other Group II, Group III and combinations of Group II and Group III base oil/viscosity grade formulations using the same or lower concentration of the identical additive (DI/VI) combination. If the PPD type is changed for the DI/VI combination, testing is required.

E.4.13 A passing GF-5 Elastomer Compatibility Test (ASTM D7216 Annex A2) in the core data set (as defined in the ACC Code) run in Group II or Group III or a mix of Group II and Group III, can be read across to formulations using other Group II or Group III or a mix of Group II and Group III base stocks.

Additionally, there is no viscosity grade restriction if the read across is limited to 0W-20, 0W-30, 5W-20, 5W-30, 10W-30 and 10W-40 viscosity grades.

When reading to a candidate using Group I base stocks, the GF-5 Elastomer Compatibility Test (ASTM D7216 Annex A2) is not required if the base oil saturates and base oil sulfur content (within the precision of the tests) of the interchange base oil fall within the range of the base oil saturates and base oil sulfur content of the base oils in the original candidate oils (minimum two candidate oils) and the DI package is unchanged.

ATIEL guidelines for:

- Viscosity grade
read-across (VGRA)
- Base oil
interchange (BOI)
- Viscosity modifier
interchange (VMI)



ATIEL viscosity grade read across guidelines

- 1 -



Oronite

TU3M test		Can be read across (RA) to:														
Test run on:																
↓	0W-20	0W-30	0W-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50	
0W-20	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
0W-30		-	RA		RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
0W-40			-			RA	RA		RA	RA	RA	RA	RA	RA	RA	RA
5W-20		RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-30			RA		-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-40						-	RA		RA	RA	RA	RA	RA	RA	RA	RA
5W-50							-			RA	RA		RA		RA	RA
10W-30			RA			RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA
10W-40							RA		-	RA	RA	RA	RA	RA	RA	RA
10W-50										-	RA		RA		RA	RA
10W-60											-					RA
15W-40							RA			RA	RA	-	RA	RA	RA	RA
15W-50										RA	RA		-		RA	RA
20W-40							RA			RA	RA		RA	-	RA	RA
20W-50										RA	RA					-

Stipulated requirement: the KV at 100°C of the finished oil of the read across grade must be greater than or equal to that of the tested grade.

TU5JP test		Can be read across (RA) to:														
Test run on:																
↓	0W-20	0W-30	0W-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50	
0W-20	-			RA	RA			RA	RA			RA	RA	RA	RA	RA
0W-30	RA	-		RA	RA	RA		RA	RA	RA		RA	RA	RA	RA	RA
0W-40	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-20				-				RA				RA		RA	RA	RA
5W-30	RA			RA	-			RA	RA			RA	RA	RA	RA	RA
5W-40	RA	RA		RA	RA	-		RA	RA	RA		RA	RA	RA	RA	RA
5W-50	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA
10W-30				RA				-				RA		RA	RA	RA
10W-40	RA			RA	RA			RA	-			RA	RA	RA	RA	RA
10W-50	RA	RA		RA	RA	RA		RA	RA	-		RA	RA	RA	RA	RA
10W-60	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA	RA
15W-40				RA				RA				-		RA	RA	RA
15W-50	RA			RA	RA			RA	RA			RA	-	RA	RA	RA
20W-40														-		RA
20W-50				RA				RA				RA		RA		-

Stipulated requirement: if the viscosity modifier concentration increase is larger than 15% mass fraction relative, VGRA can be permitted if technical support as defined in Section h.15 of the ATC Code of Practice is available to justify the read across.

ATIEL viscosity grade read across guidelines

- 2 -



M111 Sludge or DV4TD test (non dispersant viscosity modifier)															
Test run on:		Can be read across (RA) to:													
↓	OW-20	OW-30	OW-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50
OW-20	-			RA	RA			RA	RA			RA	RA	RA	RA
OW-30	RA	-		RA	RA	RA		RA	RA	RA		RA	RA	RA	RA
OW-40	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-20				-				RA				RA		RA	RA
5W-30	RA			RA	-			RA	RA			RA	RA	RA	RA
5W-40	RA	RA		RA	RA	-		RA	RA	RA		RA	RA	RA	RA
5W-50	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA
10W-30				RA				-				RA		RA	RA
10W-40				RA	RA			RA	-			RA	RA	RA	RA
10W-50	RA			RA	RA	RA		RA	RA	-		RA	RA	RA	RA
10W-60	RA	RA		RA	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA
15W-40				RA				RA				-		RA	RA
15W-50				RA				RA	RA			RA	-	RA	RA
20W-40														-	
20W-50												RA		RA	-

Stipulated requirement: if the viscosity modifier concentration increase is larger than 15% mass fraction relative, VGRA can be permitted if technical support as defined in Section h.15 of the ATC Code of Practice is available to justify the read across.

ATIEL viscosity grade read across guidelines

- 3 -



M111 Sludge or DV4TD test (dispersant viscosity modifier)															
Test run on:		Can be read across (RA) to:													
↓	0W-20	0W-30	0W-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50
0W-20	-	RA			RA	RA			RA	RA			RA		
0W-30		-	RA			RA	RA			RA	RA				
0W-40			-				RA				RA				
5W-20	RA			-	RA			RA	RA			RA	RA		RA
5W-30	RA	RA			-	RA			RA	RA			RA		
5W-40		RA	RA			-	RA			RA	RA				
5W-50			RA				-				RA				
10W-30	RA			RA	RA			-	RA			RA	RA		RA
10W-40	RA	RA			RA	RA			-	RA	RA		RA		
10W-50		RA	RA			RA	RA			-	RA				
10W-60			RA				RA				-				
15W-40	RA			RA	RA			RA	RA			-	RA		RA
15W-50	RA	RA			RA	RA			RA	RA			-		
20W-40								RA				RA		-	RA
20W-50	RA				RA			RA	RA			RA	RA		-

Stipulated requirement: if the viscosity modifier concentration increase is larger than 20% mass fraction relative or decrease by more than -10% mass fraction relative, VGRA can be permitted if technical support as defined in Section h.15 of the ATC Code of Practice is available to justify the read across.

ATIEL viscosity grade read across guidelines

- 4 -



DV6C or M271 Evo test (non dispersant viscosity modifier)															
Test run on:		Can be read across (RA) to:													
↓	OW-20	OW-30	OW-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50
OW-20	-			RA	RA			RA	RA			RA	RA	RA	RA
OW-30	RA	-		RA	RA	RA		RA	RA	RA		RA	RA	RA	RA
OW-40	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-20				-				RA				RA		RA	RA
5W-30	RA			RA	-			RA	RA			RA	RA	RA	RA
5W-40	RA	RA		RA	RA	-		RA	RA	RA		RA	RA	RA	RA
5W-50	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA
10W-30				RA				-				RA		RA	RA
10W-40				RA	RA			RA	-			RA	RA	RA	RA
10W-50	RA			RA	RA	RA		RA	RA	-		RA	RA	RA	RA
10W-60	RA	RA		RA	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA
15W-40				RA				RA				-		RA	RA
15W-50				RA				RA	RA			RA	-	RA	RA
20W-40														-	
20W-50												RA		RA	-

Stipulated requirement: if the viscosity modifier concentration increase is larger than 15% mass fraction relative, VGRA can be permitted if technical support as defined in Section h.15 of the ATC Code of Practice is available to justify the read across.

ATIEL viscosity grade read across guidelines

- 5 -



DV6C or M271 Evo test (dispersant viscosity modifier)															
Test run on:		Can be read across (RA) to:													
↓	0W-20	0W-30	0W-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50
0W-20	-	RA			RA	RA			RA	RA			RA		
0W-30		-	RA			RA	RA			RA	RA				
0W-40			-				RA				RA				
5W-20	RA			-	RA			RA	RA			RA	RA		RA
5W-30	RA	RA			-	RA			RA	RA			RA		
5W-40		RA	RA			-	RA			RA	RA				
5W-50			RA				-				RA				
10W-30	RA			RA	RA			-	RA			RA	RA		RA
10W-40	RA	RA			RA	RA			-	RA	RA		RA		
10W-50		RA	RA			RA	RA			-	RA				
10W-60			RA				RA				-				
15W-40	RA			RA	RA			RA	RA			-	RA		RA
15W-50	RA	RA			RA	RA			RA	RA			-		
20W-40								RA				RA		-	RA
20W-50	RA				RA			RA	RA			RA	RA		

Stipulated requirement: if the viscosity modifier concentration increase is larger than 20% mass fraction relative or decrease by more than -10% mass fraction relative, VGRA can be permitted if technical support as defined in Section h.15 of the ATC Code of Practice is available to justify the read across.

ATIEL viscosity grade read across guidelines

- 6 -



OM646LA wear test																	
Test run on:	Can be read across (RA) to:																
↓	0W-20	0W-30	0W-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50	30	40
0W-20	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
0W-30		-	RA		RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
0W-40			-		RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-20		RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-30			RA		-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-40						-	RA		RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-50							-			RA	RA		RA		RA		RA
10W-30			RA			RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA
10W-40							RA		-	RA	RA	RA	RA	RA	RA	RA	RA
10W-50										-	RA		RA		RA		RA
10W-60											-						
15W-40							RA			RA	RA	-	RA	RA	RA	RA	RA
15W-50											RA		-		RA		RA
20W-40							RA			RA	RA		RA	-	RA	RA	RA
20W-50											RA				-		RA
30																-	RA
40																	-

Stipulated requirement: VGRA is permitted for multigrade lubricants if the KV at 100°C in the read across viscosity grade is greater than or equal to that of the tested viscosity grade.

ATIEL viscosity grade read across guidelines

- 7 -



M111 fuel economy test															
Test run on:		Can be read across (RA) to:													
↓	0W-20	0W-30	0W-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50
0W-20	-														
0W-30	RA	-													
0W-40	RA	RA	-	RA											
5W-20	RA			-											
5W-30	RA	RA		RA	-										
5W-40	RA	RA	RA	RA	RA	-									
5W-50	RA	RA	RA	RA	RA	RA	-	RA							
10W-30	RA	RA		RA	RA			-							
10W-40	RA	RA	RA	RA	RA	RA		RA	-						
10W-50	RA	RA	RA	RA	RA	RA	RA	RA	RA	-					
10W-60	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	-	RA		RA	
15W-40	RA	RA	RA	RA	RA	RA		RA	RA			-			
15W-50	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA		RA	-		
20W-40	RA	RA	RA	RA	RA	RA		RA	RA			RA		-	
20W-50	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA		RA	RA	RA	-

Stipulated requirement:

The KV at 40°C of the finished oil of the read across grade must be lower than or equal to that of the tested grade.

The KV at 100°C of the finished oil of the read across grade must be lower than or equal to that of the tested grade.

The HTHS at 150°C viscosity of the finished oil of the read across grade must be lower than or equal to that of the tested grade.

ATIEL viscosity grade read across guidelines

- 8 -



VW TDI or OM646LA Bio or EP6CDT test (non-dispersant viscosity modifier)															
Test run on:	Can be read across (RA) to:														
↓	OW-20	OW-30	OW-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	10W-50	10W-60	15W-40	15W-50	20W-40	20W-50
OW-20	-			RA	RA			RA	RA			RA	RA	RA	RA
OW-30	RA	-		RA	RA	RA		RA	RA	RA		RA	RA	RA	RA
OW-40	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA
5W-20				-				RA				RA		RA	RA
5W-30	RA			RA	-			RA	RA			RA	RA	RA	RA
5W-40	RA	RA		RA	RA	-		RA	RA	RA		RA	RA	RA	RA
5W-50	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA	RA	RA	RA	RA
10W-30				RA				-				RA		RA	RA
10W-40	RA			RA	RA			RA	-			RA	RA	RA	RA
10W-50	RA			RA	RA	RA		RA	RA	-		RA	RA	RA	RA
10W-60	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	-	RA	RA	RA	RA
15W-40				RA				RA				-		RA	RA
15W-50				RA	RA			RA	RA			RA	-	RA	RA
20W-40														-	
20W-50				RA				RA				RA		RA	-

Stipulated requirement: if the viscosity modifier concentration increase is larger than 15% mass fraction relative, VGRA can be permitted if technical support as defined in Section h.15 of the ATC Code of Practice is available to justify the read across.

OM441LA & OM501LA Test (Non-dispersant viscosity modifier)												
Test run on:	Can be read across (RA) to:											
↓	OW-30	5W-30	5W-40	5W-50	10W-30	10W-40	15W-40	15W-50	20W-40	20W-50	30	40
OW-30	-											
5W-30		-			RA	RA	RA	RA				
5W-40			-			RA	RA	RA				
5W-50				-				RA				
10W-30					-		RA					
10W-40						-	RA	RA				
15W-40							-					
15W-50								-				
20W-40									-			
20W-50										-		
30											-	
40												-

Stipulated requirement: if the viscosity modifier concentration increase is larger than 15% mass fraction relative, VGRA can be permitted if technical support as defined in Section h.15 of the ATC Code of Practice is available to justify the read across.

ATIEL viscosity grade read across guidelines

- 9 -



MACK T-8E test (For ACEA oil sequences only)												
Test run on:	Can be read across (RA) to:											
↓	0W-30	5W-30	5W-40	5W-50	10W-30	10W-40	15W-40	15W-50	20W-40	20W-50	30	40
0W-30	-											
5W-30	RA	-	RA	RA								
5W-40	RA		-	RA								
5W-50	RA			-								
10W-30	RA	RA	RA	RA	-	RA						
10W-40	RA	RA	RA	RA		-						
15W-40	RA	RA	RA	RA	RA	RA	-	RA				
15W-50	RA	RA	RA	RA	RA	RA		-				
20W-40	RA	RA	RA	RA	RA	RA	RA	RA	-	RA		
20W-50	RA	RA	RA	RA	RA	RA	RA	RA		-		
30	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	-	RA
40	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	RA	-

Notes:

These read across table includes more viscosity grade read across than API 1509 to reflect the European market. However these read across guidelines have been produced only for test data to be used to support ACEA Oil Sequences claims. They cannot be used to support API claims where the relevant read across guidelines from API 1509 shall be followed.

ATIEL base oil interchange guidelines for the M271Evo & M111SL



From original base stock	To interchange base stock (all % in mass of the formulated lubricant)								
	GROUP I		GROUP II		GROUP III		GROUP IV		GROUP V
GROUP I	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	>10%	required	>10%	required ⁽²⁾	>30%	required	>30%	required	
GROUP II	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	>10%	required	>10%	required	>30%	required	>30%	required	
GROUP III	≤10%	not required	≤10%	not required	≤10%	not required	≤10%	not required	required
	>10%	required	>10%	required	>10%	required	>10%	required	
GROUP IV	≤10%	not required	≤10%	not required	≤10%	not required	conditions on PAO characteristics ⁽¹⁾		required
	>10%	required	>10%	required	>10%	required			
GROUP V	required		required		required		required		required

Notes:
 (1) Group IV base stocks can be interchanged without additional qualification testing, providing that the interchange PAO meets the original PAO manufacturer's specifications for physical and chemical properties.
 The following key properties need to be met in the substituted stock:
 -Kinematic viscosity at 100°C, 40°C and -40°C
 -Viscosity Index
 -Noack Volatility
 -Pour Point
 -Unsaturates
 (2) Not required for M111SL

ATIEL base oil interchange guidelines for the DV6C, DV4TD, TU3M



From original base stock	To interchange base stock (all % in mass of the formulated lubricant)								
	GROUP I		GROUP II		GROUP III		GROUP IV		GROUP V
GROUP I	not required		≤10%	not required	≤30%	not required	≤30%	not required	required
			>10%	required	>30%	required	>30%	required	
GROUP II	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	>10%	required	>10%	required	>30%	required	>30%	required	
GROUP III	≤10%	not required	≤10%	not required	≤10%	not required	≤30%	not required	required
	>10%	required	>10%	required	>10%	required	>30%	required	
GROUP IV	≤10%	not required	≤10%	not required	≤30%	not required	conditions on PAO characteristics ⁽¹⁾		required
	>10%	required	>10%	required	>30%	required			
GROUP V	required		required		required		required		required

Notes:
⁽¹⁾ Group IV base stocks can be interchanged without additional qualification testing, providing that the interchange PAO meets the original PAO manufacturer's specifications for physical and chemical properties.
The following key properties need to be met in the substituted stock:
- Kinematic viscosity at 100°C, 40°C and -40°C
- Viscosity index
- Noack volatility
- Pour point
- Unsaturation

ATIEL base oil interchange guidelines for the M111 FE test



From original base stock	To Interchange Base Stock (all % in mass of the formulated lubricant)								
	GROUP I		GROUP II		GROUP III		GROUP IV		GROUP V
GROUP I	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	>10%	HTHS, KV40 conditions ⁽¹⁾	10%-30%	HTHS, KV40 conditions ⁽¹⁾	>30%	required	>30%	required	
GROUP II	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	10%-30%	HTHS, KV40 conditions ⁽¹⁾	>10%	HTHS, KV40 conditions ⁽¹⁾	>30%	required	>30%	required	
GROUP III	≤10%	not required	≤10%	not required	≤10%	not required	≤30%	not required	required
	10%-30%	HTHS, KV40 conditions ⁽¹⁾	10%-30%	HTHS, KV40 conditions ⁽¹⁾	>10%	HTHS, KV40 conditions ⁽¹⁾	>30%	required	
GROUP IV	≤10%	not required	≤10%	not required	≤30%	not required	conditions on PAO characteristics ⁽²⁾		required
	10%-30%	HTHS, KV40 conditions ⁽¹⁾	10%-30%	HTHS, KV40 conditions ⁽¹⁾	>30%	required			
GROUP V	required		required		required		required		required

- Notes:**
- (1) No M111FE testing is required if the HTHS at 150°C and KV40 values of the interchange formulation are lower than or equal to that of the original formulation.
- (2) Group IV base stocks can be interchanged without additional qualification testing, providing that the interchange PAO meets the original PAO manufacturer's specifications for physical and chemical properties.
- The following key properties need to be met in the substituted stock:
- Kinematic viscosity at 100°C, 40°C and -40°C
 - Viscosity index
 - Noack volatility
 - Pour point
 - Unsaturates

ATIEL base oil interchange guidelines for the OM646LA test



From original base stock	To Interchange Base Stock (all % in mass of the formulated lubricant)								
	GROUP I		GROUP II		GROUP III		GROUP IV		GROUP V
GROUP I	not required		≤10%	not required	not required		not required		required
			>10%	required					
GROUP II	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	>10%	required	>10%	required	>30%	required	>30%	required	
GROUP III	≤10%	not required	≤10%	not required	≤10%	not required	≤30%	not required	required
	>10%	required	>10%	required	>10%	required	>30%	required	
GROUP IV	≤10%	not required	≤10%	not required	≤30%	not required	conditions on PAO characteristics ⁽¹⁾		required
	>10%	required	>10%	required	>30%	required			
GROUP V	required		required		required		required		required

Notes:
⁽¹⁾ Group IV base stocks can be interchanged without additional qualification testing, providing that the interchange PAO meets the original PAO manufacturer's specifications for physical and chemical properties.
The following key properties need to be met in the substituted stock:
- Kinematic viscosity at 100°C, 40°C and -40°C
- Viscosity index
- Noack volatility
- Pour point
- Unsaturation

ATIEL base oil interchange guidelines for the VW TDI, OM646LA Bio, EP6CDT, TU5JP & OM501LA



From Original base stock	To Interchange Base Stock (all % in mass of the formulated lubricant)								
	GROUP I		GROUP II		GROUP III		GROUP IV		GROUP V
GROUP I	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	>10%	required	>10%	required	>30%	required	>30%	required	
GROUP II	≤10%	not required	≤10%	not required	≤30%	not required	≤30%	not required	required
	>10%	required	>10%	required	>30%	required	>30%	required	
GROUP III	≤10%	not required	≤10%	not required	≤10%	not required	≤30%	not required	required
	>10%	required	>10%	required	>10%	required	>30%	required	
GROUP IV	≤10%	not required	≤10%	not required	≤30%	not required	conditions on PAO characteristics ⁽¹⁾		required
	>10%	required	>10%	required	>30%	required			
GROUP V	required		required		required		required		required

Notes:
 (1) Group IV base stocks can be interchanged without additional qualification testing, providing that the interchange PAO meets the original PAO manufacturer's specifications for physical and chemical properties.
 The following key properties need to be met in the substituted stock:
 -Kinematic viscosity at 100°C, 40°C and -40°C
 -Viscosity index
 -Noack volatility
 -Pour point
 -Unsaturates

ATC viscosity modifier interchange guidelines



Performance Category	NDVM to NDVM ^(1,2,3,4,5,6,7)	DVM to DVM or NDVM to DVM ^(1,2,3,4,5,6,7)
Gasoline/Light Duty Diesel	TU572, EP6CDT M111SL ⁽⁸⁾ , M271EVO ⁽⁹⁾ VW TDI M111 FE OM646LA Bio	TU572, EP6CDT M111SL ⁽⁸⁾ , M271EVO ⁽⁹⁾ OM646LA, OM646LA Bio DV4E3 ⁽¹⁰⁾ , DV6C ⁽¹⁰⁾ VW TDI M111 FE
Gasoline/Light Duty Diesel with After Treatment Devices	TU572, EP6CDT M111SL ⁽⁸⁾ , M271EVO ⁽⁹⁾ VW DI M111 FE OM646LA Bio	TU572, EP6CDT M111SL ⁽⁸⁾ , M271EVO ⁽⁹⁾ OM646LA, OM646LA Bio DV4E3 ⁽¹⁰⁾ , DV6C ⁽¹⁰⁾ VW TDI M111 FE
Heavy Duty Diesel	Mack T8E or Mack T-11 ^(11, 12, 13) OM 441 LA, OM501LA Cummins ISM ⁽¹⁴⁾ OM646LA Bio	OM646LA, OM646LA bio Mack T-8E or Mack T-11 ^(12, 13) OM 441 LA or OM501LA Cummins ISM ⁽¹⁴⁾

Notes:

- (1) Refer to Section d.2 for CEC test methods to be used.
- (2) Full testing is required for VMI not listed above.
- (3) Physical mixes of NDVM and DVM are treated as DVM.
- (4) Only the tests included in the ACEA Oil Sequence/SAE grade for which read across is required have to be run.
- (5) Where alternative tests are listed, e.g., "T-8E or T-11", the alternative test cannot be run to document read-across if a failing result has already been obtained on the other test.
- (6) Cummins ISM (or M11HST or M11 EGR for ACEA E7-12) not required if the new lubricant formulation has the same or a greater HTHS value compared with the original tested formulation.
- (7) For Sequence VG, refer to ACC Code of Practice.
- (8) Or the M271 sludge test procedure as described by Daimler AG. This engine test is not documented in the ATC Code as it is not a CEC test method.
- (9) Until the new CEC test method L-107 is fully CEC-approved, the M271 sludge test procedure as described by Daimler AG must be run. Once the L-107 is fully approved, the L-107 may be used.
- (10) Only CEC approved parameters apply.
- (11) Mack T-8E requirement is waived if the replacement NDVM is within the same chemical type as the tested NDVM (chemical type means chemical family such as, but not limited to, styrene ester, polymethacrylate, styrene butadiene, styrene isoprene, polyisoprene, olefin copolymer and polyisobutylene).
- (12) For ACEA E9-12, Mack T-11 is required instead of the Mack T-8E.
- (13) Mack T-11 results obtained as part of an API CK-4, CI-4, CI-4+ or API CJ-4 or API FA-4 approval program can be used in place of Mack T-8E.
- (14) For ACEA E7-12, the Cummins M11HST or Cummins M11EGR test may be used in place of the Cummins ISM test.

**Tests
and
engines**



Engine test conditions

- 1 -



Oronite

Tests	Engine characteristics						Test conditions								Performance ratings							
	Procedure reference	Inject. type	Engine type	Aspiration	Engine displ., l	Max. output, kW/rpm	Fuel type: RON/Pb,g/l	Fuel type: % S, FAME %	Oil fill volume, l	Total test duration, h	Duration of each phase, h	Engine speed, rpm	Load, kW.	Oil temp., °C	Deposit/ Piston cleanliness	Sludge	Varnish	Vis. incr. /Oxid.	Rust/ corros.	Ring	Wear	Other
ACEA tests																						
Mercedes M111FE	CEC L-054-96	MP	L4 (16v)		2.0	100/5500	95/ 0		4	3 times appr. 2 h ⁽²⁾	13 Step cycle	750-3070	0-49	20-75								Fuel economy
Mercedes M111SL	CEC L-53-T-95	MP	L4 (16v)		2.0	100/5500	95/ 0		4.35	286 ⁽¹⁾	48-76-100 ⁽¹⁾	750-6000	0-100	15-130	X	X				RS	Cam	
Mercedes M271 SL	CEC L-107-16	DI	L4 (16v)		1.8	150/5500	95/ 0		6.50	tbd	tbd	1000-5500	0-150	30-125		X				RS		
Mercedes OM 364LA	CEC L-42-X3-97	DI	L4	TCIC	4.0	103/2400		0.3	5.8	300	50	1000-2400	30-98	114-126	X	X		X		Liner, BP	OC	
Mercedes OM 441LA	CEC L-52-T-97	DI	V6	TCIC	11.0	243/2100		0.05	18	400	50	1140-2100	0-/ 240	120	X	X			X	General	BP/OC	
Mercedes OM 501LA	CEC L-101-08	DI	V6	TCIC	11.9	360/1800		<0.0003, 4-5	19.1 kg	300	50	1080-1800	18-360	106-126.5	X	X				BP	OC	
Mercedes OM 602A	CEC L-51-A-98	IDI	L5	TC	2.5	90/4600		0.3	7.6	200	1	1000-5000	0-90	50-142	X	X		X		Cam, liner, BP	OC	
Mercedes OM 611 DE 22 LA	MB DL, 300h	DI	L4 (16v)	TC	2.2	105/4200		0.005		300					X	X		X	X	BP	OC	
Mercedes OM646 BIO	CEC L-104-16	DI	L4 (16v)	TCIC	2.2	110/4200	B15	0.15	6.50	120	120	1000-4200	0-90	47-133	X	X		X		RS		
Mercedes OM 646LA		DI	L4 (16v)	TCIC	2.2	110/4200		<0.0003, 4-5	5 kg	300	50	750-4200	0-110	45-135						Cam		
PSA DV4 TD	CEC L-93-04	DI	L4	TC	1.4	51/4000		0.03	4.7	120	0.5	1100-4000	0-40	120	X			X				Oil soot
PSA DV6 CTED	CEC L-106-16	DI	L4	TC	1.6	82/3600		0.00, 4.5	3.7	120	0.77, 0.14; 0.08	3600; 1750; 1000	0-82	120	X			X				Oil soot
PSA EP6 CDT	CEC L-111-16	DI	L4 (16v)	TCIC	1.6	115/5800	E10, 100/0	0 / 0	4.7	174	29	750-6500	0-115	50-125	X							turbo
PSA TU-3MS	CEC L-038-94	SP	L4 (16v)		1.4	53/5500	95/ 0		3	100	40-60	1500-3000	1.6-11	40-100						Cam	Follower Scuffing	
PSA TU-5JP-L4	CEC L-088-02	MP	L4 (16v)		1.6	80/5800	95/ 0		3.2	72	6*2 phases (6*12h)	5600	62	150			X	X		RS		OC
Volvo D12D	PK320	DI	L6	TC	12.1	338		0.0003	17.8	400	0.1 0.2	600-1800	0-338	110-125	X					Ring Rid-ing	BP	OC
Volvo D12DFE		DI	L6	TC	12.1	338		0.0003		24	3* 8h.	600-1700	0-338	105-110								Fuel economy
VW TDI	CEC L-078-99	DI	L4	TCIC	1.9	81/4150		0.3	4.5	54	2.5 0.5	4150-Idle	81-Idle	145-40	X			X		X		

Engine test conditions - 2 -



Oronite

Tests	Engine characteristics						Test conditions								Performance ratings							
	Procedure reference	Inject. type	Engine type	Aspiration	Engine displ., l	Max. output, kW/rpm	Fuel type: RON/Pb,g/l	Fuel type: % S, FAME %	Oil fill volume, l	Total test duration, h	Duration of each phase, h	Engine speed, rpm	Load, kW.	Oil temp., °C	Deposit/ Piston cleanliness	Sludge	Varnish	Vis. incr. /Oxid.	Rust/ corros.	Ring	Wear	Other
JASO tests																						
Mitsubishi Fuso 4D34T4	JASO M 354:05	DI	L4	TCIC	3.9	121.4/3200		0.05 max, 0.001 max	7.0	160	-	3200	121.4	105							Cam	
Nissan Diesel TD25	JASO M 336:98	IDI	L4	-	2.5	55.0/4300		0.05 max, 0.001 max	4.8	200	-	4300	55.0	120	X					RS		
Hino N04C	JASO M 354:15 JASO M 336:14	DI	L4	TCIC	4.0	120/2800		0.001 max	8.0	200	-	2800	120	113	-						Tappet -	
Nissan VG20E	JASO M 331:91	PFI	V6		2.0	91.9/6000	89-93 O		2	200 or 300	1h (24+24+12)	800 1800 3500	1.6 18.5 34.1	50 96 117	WTD	X						
Nissan KA24E	JASO M 328:95	PFI	L4		2.4	103/5600	89 min. O		3	100	1h (50+10)	800 1500	1.2 2.3	50 60.5							Cam	
Toyota IGFE	JASO M 333:93	PFI	L6		2.0	99/5600	89 min. O		2.5	48 or 96		4800	29.6	149				X				

Notes:

- (1) Depending on fuel batch severity.
(2) Ref.-cand.-ref.

MP = Multi point
SP = Single point
DI = Direct Injection

TCIC = Turboch. intercooler
TC = Turbocharged
IDI = Indirect Diesel Injection
PFI = Port fuel injection

L4 = In Line 4 cylinders
V6 = 6 cylinders in V
L6 = In Line 6 cylinders
L5 = In Line 5 cylinders

RS = Ring Sticking
OC = Oil consumption
BP = Bore polishing

Engine test conditions

- 3 -



Tests	Engine characteristics						Test conditions								Performance ratings							
	Procedure reference	Inject. type	Engine type	Aspiration	Engine displ., l	Max. output, kW/rpm	Fuel type: RON/ Pb,g/l	Fuel type: % S, FAME %	Oil fill volume, l	Total test duration, h	Duration of each phase, h	Engine speed, rpm	Load, kW.	Oil temp., °C	Deposit/ Piston cleanliness	Sludge	Varnish	Vis. incr. /Oxid.	Rust/ corros.	Ring	Wear	Other
API / ILSAC tests																						
BRT	ASTM D6557	Bench test to replace Seq IID engine test							0.1	18									rust			
CAT 1M-PC (for CF)	ASTM D6618	IDI	1Y73 Singe cyl.	TC	2.2	31.3/ 1800		0.40 min.	6.8	120		1800	31	Bearing 96	WTD TGF		WTD		RSC RS		Liner scuffing	
Caterpillar 1K	ASTM D6750	DI	1Y540 Single cyl.	TC	2.4	52/ 2100		0.40	6.0	252		2100	52	Bearing 107	WDK TGF TLHC		WDK			RS		
Caterpillar 1N	ASTM D6750	DI	1Y540 Single cyl.	TC	2.4	52/ 2100		0.05	6.0	252		2100	52	Bearing 107	WDN TGF TLHC		WDN			RS	Liner scuffing	OC
Caterpillar 1P	ASTM D6681	DI	1Y3700 Single cyl.	TC	2.43	55/ 1800		0.05	6.8	360		1800	55	130+/-3	WDP TLC TGC		WDP					OC
Caterpillar 1R	ASTM D6923	DI	1Y3700 Single cyl.	TC	2.43	68/ 1800		0.05	6.8	504		1800	68	120	WD TLC TGC		WDR			RS	Liner scuffing	OC
Caterpillar C13	ASTM D7549	DI	C13	TC	12.5	391/ 1800		0.0015	38	500		1800	1760	Gallery 98	WTD TGC TLHC TGF TLC		WTD			RSC RS, weight loss		OC
Cummins ISB	ASTM D7484	DI	L6	TC	5.9	224/ 2600		0.0015	14.5	350	100/250	1600/ Cyclic		110							Valve train	
Cummins ISM	ASTM D7468	DI	L6	TC	10.82	332/ 1900		0.05	24.8	200	50	1600 +/-2 1800 +/-5	300	115		Rocker cover and oil pan					Valve train	Filter plugging
Cummins M11	ASTM D6838	DI	370E	TC	11.0	275/ 1800		0.05	29	200	50	1600 +/-2 1800 +/-5	275	130 maxi.		Filter plug- ging					Valve train	
Cummins M11-EGR	ASTM D6975	DI	L6	TC	11.0	275/ 1800		0.05		300	50	1600 +/-2 1800 +/-5				Filter plug- ging					Valve train	
Cummins NTC-400		DI		TCIC	14	298/ 2100		0.4		200		2100	298	250	X						Cam follower pin	OC
DD6V92TA	ASTM D5862	DI	V6 2 Cycle	TCIC	9.0	370/ 2300		0.1-0.4	22	100		1200 2300	130 364 379	102-111					Face distress		Liner scuffing Port plug- ging	

Engine test conditions - 4 -



Tests	Engine characteristics						Test conditions								Performance ratings							
	Procedure reference	Inject. type	Engine type	Aspiration	Engine displ., l	Max. output, kW/rpm	Fuel type: RON/Pb,g/l	Fuel type: % S, FAME %	Oil fill volume, l	Total test duration, h	Duration of each phase, h	Engine speed, rpm	Load, kW	Oil temp., °C	Deposit/ Piston cleanliness	Sludge	Varnish	Vis. incr. /Oxid.	Rust/ corros.	Ring	Wear	Other
API / ILSAC tests																						
EOAT Navistar	ASTM D6894	DI	V8	TC	7.3	160/3000		0.05	16	20		3000	153	121 max								Deaeration
COAT	ASTM D8047	DI	L6	TC	12.5	320/1800		0.0015	38	50		1800	0	90								Deaeration
Mack T-9	ASTM D6483	DI	E7-350	TC	12.0	261/1800		0.05	45.4	500	75/425	1800/1250	0/261	99/ 107					X	Weight loss	Liner + BC	TR
Mack T-8	ASTM D5967	DI	E.7	TC	12.0	258/1800		0.05	45.4	250		1800	258	100-107		Filter plugging		X				OC
Mack T-8A	ASTM D5967	DI	E.7	TC	12.0	258/1800		0.05	45.4	150		1800	258	100-107		Filter plugging		X				
Mack T-8E	ASTM D5967	DI	E.7	TC	12.0	258/1800		0.05	45.4	300		1800	258	100-107				X				OC
Mack T-10	ASTM D6987	DI	L6	TC	12.0	343/1800		0.05	35.9	300	75/225	1800/1200	245/325	88/ 112					Weight loss	Liner	BC	OC
Mack T-11	ASTM D7156	DI	L6	TC	12.0	343/1800		0.05	30.9	252		1800	240	88				X				
Mack T-12	ASTM D7422	DI	L6	TC	12.0	343/1800		0.0015	35.9	300	100/200	1800/1200	245/325	88/ 116					Weight loss	Liner	BC	OC
Mack T-13	ASTM D8048	DI	L6	TC	13	371/1500	PC-10 Test Fuel	-13ppm S, 0% FAME	25.8 kg for break-in, 22.8 kg test charge	360	360 h	1500	-340-370 kW. Load is controlled to a fuel flow rate of 68 kg/hr	130				X			Liner wear / bearings	OC
RFWT	ASTM D5966	IDI	V6	-	6.5	155/3500		0.05		50		1000	30-34	120							Roller follower	
SEQ IIIE	ASTM D5533		V6		3.8		Leaded gasoline			64		3000	50.6	149				X		RS	Cam + lobe	OC
SEQ IIIF	ASTM D6984		V6		3.8		Unl. gasoline			80		3600	73.6	155	X		X	X		RS	Cam + lifter	
SEQ IIIG	ASTM D7320		V6		3.8	125 bhp/3600	Unl. gasoline			100	Steady state	3600		150	X			X		Hot stuck	X	OC
SEQ IIIH	ASTM D8111	PFI	Chrysler V6		3.6	224 / 6350	Unl. Gasoline			90	Steady state	3900	102	151	X		X	X		RS		
SEQ IV-A	ASTM D6891	PFI	L4		2.4	103 / 5600	89 min.		3	100	1h (50+10)	800 / 1500	1.2 / 2.3	50 / 60.5							Cam	

Engine test conditions - 5 -



Tests	Engine characteristics						Test conditions								Performance ratings							
	Procedure reference	Inject. type	Engine type	Aspiration	Engine displ., l	Max. output, kW/rpm	Fuel type: RON/Pb,g/l	Fuel type: % S, FAME %	Oil fill volume, l	Total test duration, h	Duration of each phase, h	Engine speed, rpm	Load, kW.	Oil temp., °C	Deposit/ Piston cleanliness	Sludge	Varnish	Vis. incr. /Oxid.	Rust/ corros.	Ring	Wear	Other
API / ILSAC tests																						
SEQ IV-B	ASTM Dxxxx	PFI	L4		1.5		0			200	7 / 8 seconds	800 / 4300		54							Cam + lifter	
SEQ VE	ASTM D5302	PFI	Ford OCH-4		2.3		Unl. Gasoline		3.67	288	120 ¹⁰ x 72 75 ¹⁰ x 72 45 ¹⁰ x 72	2500 2500 750	25 25 0.75	68 99 46		X	X			RS	Cam	
SEQ VG	ASTM D6593	PFI	Ford V8		4.6		Unl. Phillips « J »		3	216	2 115 0.45	1200 2900 700		68 100 45		X	X			RS		
SEQ VH	ASTM Dxxxx	PFI	Ford V8		4.6		Unl. Gasoline			216	2 115 0.45	1200 2900 700		68 100 45		X	X			RS		
SEQ VI-B	ASTM D6837	MP	Ford V-8 ('93)		4.6		Unl. Gasoline		6	133	I aging = 16 II aging = 80 FE I 7.5 FE II 7.5	800 1500	218 15.39	45 105								Fuel economy
SEQ VI-D	ASTM D7589	MP	GM V6		3.6		Unl. Gasoline		5.4	155	I aging = 16 II aging = 109 FE I 7.5 FE II 7.5	695- 2000	1.5-22	35-115								Fuel econ./ FE retention
SEQ VI-E	ASTM D8114	DI	GM V6		3.6	226 / 6800	Unl. Gasoline		5.4	196	I aging = 16 II aging = 109 FE I 7.5 FE II 7.5	695- 2000	1.5-22	35-115								Fuel econ./ FE retention
SEQ VI-F	ASTM Dxxxx	DI	GM V6		3.6	226 / 6800	Unl. Gasoline		5.4	196	I aging = 16 II aging = 109 FE I 7.5 FE II 7.5	695- 2000	1.5-22	35-115								Fuel econ./ FE retention
SEQ VIII	ASTM D6709		CLR mono		0.7	3.7 / 3150	Unl. Gasoline		1.8	40		3150	- 3.7	143					BWL			Shear stability
SEQ IX	ASTM Dxxxx	DI	Ford Ecoboost L4	TC	2.0	269 / 1750	Unl. Gasoline			16		1750	49	95								Pre-ignition events
SEQ X	ASTM Dxxxx	PFI	Ford V8		4.6		Unl. Gasoline			216	2 125 0.45	1200 2900 700		68 100 45		X	X			RS		

Notes:

- (1) Depending on fuel batch severity
(2) Ref.-cand.-ref

IC = Intercooler
IDI = Indirect Diesel Injection
DI = Direct Injection
PFI = Port fuel injection
SC = Supercharged

TC = Turbocharged
MP = Multi point
TCIC = Turboch. intercooler
L4 = In Line 4 cylinders
V6 = 6 cylinders in V

L6 = In Line 6 cylinders
V8 = 8 cylinders in V
RS = Ring Sticking
OC = Oil consumption
RSC = Ring side clearance

BP = Bore Polishing
BC = Bearing corrosion
BWL = Bearing Weight Loss

WDK = Total weighted demerit for Cat 1K
WDK = Total weighted demerit for Cat 1K
WDK = Total weighted demerit for Cat 1K
WDK = Total weighted demerit for Cat 1K

TGC = Top groove carbon
TGF = Top groove filling
TLC = Top land carbon
TLHC = Top land heavy carbon

**Elastomer
compatibility
testing**



Elastomer compatibility operating conditions and limits

- 1 -



Specifications	ACEA 2008 / 2010 / 2012						
Related specifications	Seq. A/B, C	Seq. E	Seq. A/B, C, E	Seq. A/B, C	Seq. E	Seq. A/B, C, E	
Elastomer material	RE1 (FPM, Fluorocarbon)		RE2-99 (ACM, Acryl Acrylate Copolymers)	RE3-04 (VMQ, Silicon)		RE4 (NBR, Nitrile Butyl Rubber)	DBL-AEM Vamac, Ethylene Acrylic Elastomer)
Operating conditions	CEC L-39-96					CEC L-39-96	CEC L-39-96
Test piece	S 2					S 2	S 2
Duration, h	168					168	168
Pre-aging of the oil	No					No	No
Oil weight, g	270					270	270
Temperature, °C	150					100	150
Change after test							
Hardness, pts	-1 / +5	-1 / +5	-5 / +8	- 22 / +1	-25 / +1	-5 / +5	-5 / +10
Tensile strength, %	-40 / +10	-50 / +10	-15 / +18	-30 / +10	-45 / +10	-20 / +10	-35 / -
Elongation at break, %	-50 / +10	-60 / +10	-35 / +10	-20 / +10	-20 / +10	-50 / +10	-50 / -
Volume, %	-1 / +5	-1 / +5	-7 / +5	-1 / +22	-1 / +30	-5 / +5	-5 / +15

Specifications	ACEA 2016			
Related specifications	Sequence A/B, C, E			
CEC L-112-16	RE6	RE7	RE8	RE9
Elastomer material	(FKM, Fluorocarbon)	(ACM, Acryl Acrylate Copolymers)	(HNBR, Hydrogenated Nitrile Butyl Rubber)	(AEM, Ethylene Acrylic Elastomer)
Operating conditions	CEC L-112-16			
Test piece	S 2	S2	S 2	S 2
Duration, h	168	168	168	168
Pre-aging of the oil	No	No	No	No
Oil weight, g	270	270	270	270
Temperature, °C	150	120	150	150
Change after test				
Tensile strength, %	Report	Report	Report	Report
Elongation at break, %	-70 / +20	-65 / +15	-51 / +9	-65 / +19
Volume, %	-5.5 / +2.1	-1.8 / +8.9	0.0 / +12.0	-2.5 / +16.0

Elastomer compatibility operating conditions and limits

- 2 -



Specifications	JASO DH-1 / DH-2 / DL-1								
Related specifications	DH-1, DL-1	DH-2	DH-1, DH-2, DL-1		DH-1, DH-2, DL-1		DH-1, DH-2, DL-1		
Elastomer material	RE1 (FPM, Fluoro)		RE2-99 (ACM, Acrylic)		RE3-04 (VMQ, Silicon)		RE4 (NBR, Nitrile)	DBL-AEM (Vama Ethylene Acrylic)	
Operating conditions	CEC L-39-96							CEC L-39-96	CEC L-39-96
Test piece	S 2							S 2	S 2
Duration, h	168							168	168
Pre-aging of the oil	No							No	No
Oil weight, g	270							270	270
Temperature, °C	150							100	150
Change after test									
Hardness change, pts	-1 / +5	-1 / +5	-5 / +8		-25 / +1	-5 / +5	-35 / -		
Tensile strength change, %	-40 / +10	-50 / +10	-15 / +18		-45 / +10	-20 / +10	-50 / -		
Elongation at break change, %	-50 / +10	-60 / +10	-35 / +10		-20 / +10	-50 / +10	-5 / +15		
Volume change, %	-1 / +5	-1 / +5	-7 / +5		-1 / +30	-5 / +10	-		

Elastomer compatibility operating conditions and limits

- 3 -



Specifications	API CI-4 / CI-4 PLUS				
	API CJ-4 / CK-4 / FA-4				
Elastomer material	Nitrile (NBR)	Silicone (VMQ)	Polyacrylate (ACM)	Fluoroelastomer (FKM)	Vamac G
Operating conditions	ASTM D7216				
Duration, h	336				
Pre-aging of the oil	No				
Temperature, °C	100	150	150	150	150
Change after test ^{(1) (2)}					
Volume change, %	+5 / -3	+TMC 1006 / -3	+5 / -3	+5 / -2	+TMC 1006 / -3
Hardness change, pts	+7 / -5	+5 /-TMC 1006	+8 / -5	+7 / -5	+5 / -TMC 1006
Tensile strength change, %	+10 / -TMC 1006	+10 / -45	+18 / -15	+10 / -TMC 1006	+10 / -TMC 1006
Elongation at break change, %	+10 / -TMC 1006	+20 / -30	+10 / -35	+10 / -TMC 1006	+10 / -TMC 1006
Compression set ⁽³⁾	Report	Report	Report	Report	Report

Notes:
 (1) These are unadjusted specification limits for elastomer compatibility. Candidate oils shall, however, conform the adjusted specification limits, the calculation of which is described in ASTM D4485 annex A4.
 (2) Ref Oil is TMC 1006 (original blend or subsequent approved re-blends of TMC 1006).
 (3) Only required for DFS 93K214, per ASTM D395.

Elastomer compatibility operating conditions and limits

- 4 -



Oronite

Specifications	API SN / SN Resource Conserving / ILSAC GF-5				
	API SP / SP Resource Conserving/ ILSAC GF-6				
Elastomer material	Hydrogenated Nitrile (HNBR-1)	Silicone (VMQ-1)	Polyacrylate (ACM-1)	Fluorocarbon (FKM-1)	Ethylene Acrylic (AEM-1)
Operating conditions	ASTM D7216 Annex A2				
Duration, h	336				
Pre-aging of the oil	No				
Temperature, °C	100	150	150	150	150
Variations after test ⁽¹⁾					
Volume change, %	-5 / 10	-5 / 40	-5 / 9	-2 / 3	-5 / 30
Hardness change, pts	-10 / 5	-30 / 10	-10 / 10	-6 / 6	-20 / 10
Tensile strength change, %	-20 / 15	-50 / 5	-40 / 40	-65 / 10	-30 / 30

Notes:

(1) Candidate oil testing for elastomer compatibility shall be performed using the five Standard Reference Elastomers (SREs) referenced herein and defined in SAE J2643.

Candidate oil testing shall be performed according to ASTM D7216 Annex A2.

The post-candidate-oil-immersion elastomers shall conform to the specification limits detailed herein.

Elastomer compatibility operating conditions and limits

- 5 -



Specifications	GLOBAL DHD-1			
Elastomer material	RE1 (FPM, Fluorocarbon)	RE2 (ACM, Acryl Acrylate Copolymers)	RE3 (VMQ, Silicon)	RE4 (NBR, Nitrile Butyl Rubber)
Operating conditions	CEC L-39-96			CEC L-39-96
Test piece	S 2			S 2
Duration, h	168			168
Pre-aging of the oil	No			No
Oil weight, g	270			270
Temperature, °C	150			100
Variations after test in				
Hardness change, pts	-1 / +5	-5 / +5	-25 / +1	-5 / +5
Tensile strength change, %	-50 / +10	-15 / +10	-45 / +10	-20 / +10
Elongation at break change, %	-60 / +10	-35 / +10	-20 / +10	-50 / +10
Volume change, %	-1 / +5	-5 / +5	-1 / +30	-5 / +5

Elastomer compatibility operating conditions and limits

- 6 -



Specifications	GM dexos1 / 2						
Elastomer material	RE1 (FPM)	RE4 (NBR)	DBL-AEM (Vamac)	Nitrile (NBR-1)	Silicone (VMQ-1)	Fluorocarbon (FKM-2)	Polyacrylate (ACM-1) ⁽¹⁾
Operating conditions	CEC L-39-96		VDA 675301	ASTM D7216 Annex A2			
Test piece	S 2		S 2				
Duration, h	168		168				
Pre-aging of the oil	No		No				
Oil weight, g or specimen : oil ratio	270		1 : 80				
Temperature, °C	150		150				
Change after test							
Hardness change, pts.	-1 / +5	-5 / +5	-5 / +10	-5 / +5	-30 / +10	-30 / +10 (Dexos 1) -10 / +10 (Dexos 2)	-10 / +10
Tensile strength change, %.	-40 / +10	-20 / +10	-35 / -	-20 / +10	-45 / 0	-80 / +50	-30 / +30
Elongation at break change, %.	-50 / +10	-50 / +10	-50 / -	-35 / 0	-40 / 0	-90 / +55	-45 / +5
Volume change, %.	-1 / +5	-5 / +5	-5 / +15	-5 / +5	-5 / +40	-5 / +5	-5 / +5
Tensile stress at 50% elongation change, %	-	-	-	-10 / +35	-50 / +10	-50 / +55	-20 / +65

Notes:

(1) Use ACM-1 until ACM-2 is available.

Elastomer compatibility operating conditions and limits

- 7 -



Specifications	VOLKSWAGEN Factory Fill specifications							
Elastomer material	RE-AK6/1 ⁽¹⁾		RE-ACM1 ⁽²⁾		RE-AEM2 ⁽³⁾		RE-AEM1 ⁽⁴⁾	
VW TL 521 67		X		X		X		X
VW TL 521 95	X		X		X		X	
VW TL 525 77	X		X		X			
Operating conditions								
Procedure	PV 3344, PV 3323, DIN 53504							
Test Piece	S3A							
Pre aging	Yes							
Specimen: oil ratio	1 : 80							
Temperature, °C	150							
Duration, h	168	282 (3 x 94)	500	168	500	168	500	168
Change after test								
Tensile strength, N/mm ² , min.	7	8	-	-	-	-	-	-
Tensile strength change, % max.	60	-	40	30	40	35	40	30
Elongation at break, %, min.	160	160	-	-	-	-	-	-
Elongation at break change, %, max.	50	50	40	30	40	30	40	30
Hardness change, pts.	-	-	-4 / +10	-5 / +6	-4 / +10	-10 / +10	-4 / +10	-8 / +8
Weight change, %	-	-	-2 / +6	-2 / +4	-3 / +10	-3 / +15	-3 / +10	-3 / +15
Cracks	None	None	-	-	-	-	-	-

Notes:

(1) Old name: FPM AK6

(2) Old name: ACM

(3) Old name: Vamac

(4) RE-AEM1 scheduled to disappear, AEM2 is replacement

Elastomer compatibility operating conditions and limits

- 8 -



Specifications	VOLKSWAGEN Service Fill specifications							
Elastomer material	RE-AK6/1 ⁽¹⁾		RE-ACM1 ⁽²⁾		RE-AEM2 ⁽³⁾		RE-AEM1 ⁽⁴⁾	
VW 504 00 / 507 00	X		X		X		X	
VW 508 00 / 509 00	X		X		X		X	
VW 502 00 / 505 01		X		X		X		X
VW 502 00 / 505 00		X		X		X		X
VW 501 01 / 505 00		X		X		X		X
Operating conditions								
Procedure	PV 3344, PV 3323, DIN 53504							
Test piece	S3A							
Pre aging	Yes							
Ratio specimen: oil	1 : 80							
Temperature, °C	150							
Duration, h	168	282 (3 x 94)	500	168	500	168	500	168
Change after test								
Tensile strength, N/mm ² , min.	7	8	-	-	-	-	-	-
Tensile strength change at break, % max.	60	50	40	30	40	35	40	30
Elongation at break, %, min.	160	160	-	-	-	-	-	-
Elongation at break change, %, max.	50	50	40	30	40	40	40	30
Hardness change, pts.	-	-	-4 / +10	-5 / +6	-4 / +10	-10 / +10	-4 / +10	-8 / +8
Weight change, %	-	-	-2 / +6	-2 / +4	-3 / +10	-3 / +15	-3 / +10	-3 / +15
Cracks	None	None	-	-	-	-	-	-

Notes:

(1) Old name: FPM AK6

(2) Old name: ACM

(3) Old name: Vamac

(4) RE-AEM1 scheduled to disappear, AEM2 is replacement

Elastomer compatibility operating conditions and limits

- 9 -



Specifications	FORD WSS-M2C948-B	
Elastomer material	RE1, RE2-99, RE3-04, RE4, DBL-AEM	Ford HNBR (Hydrogenated Nitrile Butyl Rubber)
Operating conditions		CEC L-039-96
Test piece	See ACEA Sequences	S 2
Duration, h		168
Pre-aging of the oil		No
Oil weight, g		270
Temperature, °C		150
Change after test		
Hardness change, pts	See ACEA Sequences	-5 / +6
Tensile strength change, %		-30 / +20
Elongation at break change, %		-35
Volume change, %		-5 / +5

Elastomer compatibility operating conditions and limits

- 10 -



Specifications	MB 226.5, 229.1, .3	MB 226.51	MB 228.0, .1, .2, .3	MB 228.31	MB 228.5	MB 228.51	MB 228.61	MB 229.31, .51, .52	229.5	MB 229.6
Requirements	ACEA A3/B3	ACEA C4	ACEA E7	ACEA E9 API CJ-4	ACEA E4	ACEA E6	ACEA F8 API FA-4	ACEA C3	ACEA A3/B4	ACEA A5/B5

Specifications	MAN M 3271-1, 3 / 3275-1, -2 / 3277 / 3377 / 3477 / 3575 / 3677		MTU MTL 5044 Oil Cat. 1 / 2 / 2.1 / 3 / 3.1	
Elastomer material	NBR (SRE-NBR 28)	FPM (AK 6)	NBR (SRE-NBR 28)	FPM (AK6)
Operating conditions	VDA 675 301	VDA 675 301 and M 3273 ⁽¹⁾	DIN 53521	DIN 53521
Test piece	S 2	S 2	S 2	S 2
Duration, h	168	168	168	168
Pre-aging of the oil	No	No	No	No
Oil weight, specimen / oil ratio	1 : 80	1 : 80	1 : 80	1 : 80
Temperature, °C	100	150	100	150
Change after test				
Hardness change, pts	max. -10	-5 / +5	-10 / 0	-5 / +5
Tensile strength change, % min.	max. -20	max. -30	max. -20	max. -50
Elongation at break change, %, min.	max. -30	max. -40	max. -35	max. -55
Volume change, %	0 / +10	-2 / +5	0 / +10	0 / +5

Notes:

(1) Procedure with addition of 0.6 % vol. of hydrochloric acid to the candidate oil to test.

Elastomer compatibility operating conditions and limits

- 11 -



Specifications	CES 20078	CES 20081 / 20086 / 20087 DFS 93K214 / 93K218 / 93K222 / 93K223 VDS-3 / 4 / 4.5
Requirements	API CI-4, CI-4 PLUS	API CJ-4, CK-4, FA-4

Elastomer compatibility operating conditions and limits

- 12 -



Specifications	PSA B71 2290 & PSA B71 2297							
	AEM2		FKM4		FKM1		HNBR1	
Elastomer material	Freudenberg AEM 8540 blue		Freudenberg 80FKM260519 noir		Freudenberg 75FKM595 brun		Freudenberg 70HNBR248231 noir	
Operating conditions	S22 5106							
Duration, h	168	1000	168	1000	168	1000	168	1000
Temperature, °C	150	150	150	150	150	150	135	135
Change after test								
Volume variation, %	-5 / 5	-5 / 5	-3 / 3	-3 / 3	-3 / 3	-3 / 3	-5 / 5	-5 / 5
IRDH (Hardness) variation, points	-5 / +5	0 / +10	-5 / +5	-5 / +5	-5 / +5	-5 / +5	-5 / +5	-5 / +5
Module 100 variation, %, max.	+50	+70	+50	+70	N/A	N/A	+50	+70
Tensile strength variation, %, min.	-20	-20	-30	-40	-80	-80	-20	-20
Elongation at break variation, %, min.	-30	-40	-30	-60	-60	-70	-30	-30
Elongation at break, % min.	150	150	150	100	100	100	150	150
Compression set, %, max.	30	50	50	50	70	90	60	70

Specifications	PSA B71 2290 & PSA B71 2297			
	RE6	RE7	RE8	RE9
Elastomer material	(FKM, Fluorocarbon)	(ACM, Acryl Acrylate Copolymers)	(HNBR, Hydrogenated Nitrile Butyl Rubber)	(AEM, Ethylene Acrylic Elastomer)
Operating conditions	CEC L-112-16			
Test piece	S2	S2	S2	S2
Duration, h	168	168	168	168
Pre-aging of the oil	No	No	No	No
Oil weight, g	270	270	270	270
Temperature, °C	150	120	150	150
Change after test				
Tensile strength, %	-60	-30	-20	-20
Elongation at break, %	-50	-30	-40	-30
Volume, %	-3 / +3	-3 / +3	5 / +10	-5 / +5

Elastomer compatibility operating conditions and limits

- 13 -



Specifications	FORD WSS-M2C948-B	
Elastomer material	Volume change ⁽¹⁾	Hardness change ⁽¹⁾
V1 (Ethylene/Acrylic)	+7 to +20	-15 to -2
V2 (Ethylene/Acrylic)	+2 to +12	-7 to +3
V3 (Ethylene/Acrylic)	+7 to +22	-14 to -2
P1 (Polyacrylate)	0.00 to +8	-10 to 0.00
P2 (Polyacrylate)	0.00 to +8	-11 to ≈3
P3 (Polyacrylate)	0.00 to +4	-8 to +4
F1 (Fluoroelastomer)	0.00 to +4	-5 to +4
F2 (Fluoroelastomer)	0.00 to +4	-2 to +5
N1 (Nitrile)	Report	Report

Notes:

(1) Limits are subject to change because of variation in elastomer performance from one batch to the next. If results in a reference are outside the limits stated in the tabel, the limit shall be replaced with "equal to or better than reference".

**Requirements
for approvals
and
performance
recognition**



Approvals and performance recognition

- 1 -



Specifications	Oil Company actions				OEM actions			Fees						
	Official letter	Forms	Sample	IR	Official letter	Validity period	Qualified prod. list	Original	Reblend	Rebrand	Formulation change	Annual field sample	Annual renewal fee	Small changes, documentation fees
API Licensing	No	Yes	No	No	Yes	1 year	Yes ⁽²⁾	⁽³⁾	⁽³⁾	⁽³⁾	No			
ACEA	No	Yes	No	No	No	⁽¹⁾	No	No	0	0	0	0	0	0
BMW	Yes	Yes	Yes	No	Yes	2 years ⁽⁷⁾	Yes	5000 €	3000 €	2000 €	4000 €	No	500 €	No
CUMMINS CES 20074, 20076, 20077, 20078, 20081, 20086, 20087	No	No	No	No	Yes	1 year	Cummins internal		15000 US \$	15000 US \$		No	Yes for customers	
Detroit Diesel 93K214, 93K215, 93K216, 93K218	Yes	Yes ⁽⁴⁾	Yes	No	Yes	1 year	DDC Website	1050 US \$	1050 US \$	1050 US \$		No	Yes ⁽⁵⁾	100-200 US \$
JASO DH-1, DH-2, DL-1	Yes	Yes	No	Yes	Yes	1 year ⁽⁷⁾	Yes	40000 ¥	40000 ¥	40000 ¥	No, without change of product name	No	Yes ⁽⁷⁾	No
Mack EO-M Plus	No	Yes ⁽⁴⁾	Yes	No	Yes	⁽¹⁾	Mack Website	1080 US \$	1080 US \$	1080 US \$		No	No	100-200 US \$
Volvo VDS-4 / Mack EO-O Premium Plus	No	Yes ⁽⁴⁾	Yes	No	Yes	2 years	Mack Website	1080 US \$	1080 US \$	1080 US \$		Yes ⁽⁶⁾	No	100-200 US \$
Volvo VDS-4.5 / Mack EOS-4.5	No	Yes ⁽⁴⁾	Yes	No	Yes	2 years	Mack Website	0	0	0				
MAN M3277, MAN M3477, MAN M3677	Yes	Yes ⁽¹⁶⁾	2 l	No	Yes	2 years	Yes	5000 €	2500 €	2500 €	5000 €			
MERCEDES-BENZ	Yes	Yes ⁽⁸⁾	100 ml	No	Yes	5 year max. ⁽⁹⁾	Yes	2500 €	2500 €	2500 €	1250 €			
MTU	Single grade	Yes	Yes ⁽¹³⁾	Yes ⁽¹³⁾	Yes	-	Yes	1250 €	1000 €	1000 €	625 €			
	Multi-grade							1750 €	1250 €	1250 €				
Dexos	No ⁽¹⁹⁾	Yes	1 gal	No	No	⁽¹⁴⁾	Yes	1000 €	3150 €	3150 €	1000 €	Yes	Yes ⁽¹⁵⁾	
PORSCHE	Yes	Yes	2 l	Yes	Yes	3 years	Yes	3250 €	3250 €	3250 €	3250 €	No	No	No
PSA	Yes	Yes	No	Yes	Yes	1 year ⁽²⁰⁾	Yes	20000 €	20000 €	20000 €	20000 €	No	20000 €	No
RENAULT (passenger cars)	Yes	Yes	2 l	No	Yes	4 years	Yes	5800 €	5800 €	5800 €	5800 €	No	No	Yes
VOLVO VDS-3	Yes	No	No	No	Yes	⁽¹⁾	No	No	No	No	No			

Approvals and performance recognition

- 2 -



Specifications		Oil Company actions				OEM actions			Fees						
		Official letter	Forms	Sample	IR	Official letter	Validity period	Qualified prod. list	Original	Reblend	Rebrand	Formulation change	Annual field sample	Annual renewal fee	Small changes, documentation fees
Deutz	DQC II	Yes	Yes	Yes	No	Yes	3 years	No	1000 €	750 €	750 €	-			
	DQC III & DQC IV								2500 €	2000 €	1500 €				
VW 500 00, VW 501 01, VW 502 00, VW 503 00, VW 505 01 ⁽⁷⁾ , VW 503 01, VW 505 00, VW 506 00, VW 506 01		No ⁽¹⁹⁾	Yes	No	Yes	Yes	⁽¹⁸⁾	No ⁽¹²⁾	0	2000 €	1340 €	0 €	No	No	No

Notes:

- (1) Valid until specification change or modification in lubricant formulation.
- (2) API publication 1520.
- (3) Fees are calculated according to a yearly volume of production of lubricants to be licensed: minimum is US \$ 1250 for API members and US \$ 1500 for non-members. In addition, an annual fee of US \$ 0.0020 per gallon of licensed motor oil after the 1st million gallons of product is assessed.
- (4) Forms submitted to Test Engineering Inc. of San Antonio, Texas.
- (5) Annual renewal fee is US \$500/product.
- (6) Mack field sample US \$1000 each.
- (7) To maintain on-file registration, it's required to pay an on-file maintenance fee: minimum charge is 30 000 ¥ per year up to 1 000 kl of sales of each registered oil. For sales quantity of 1 000 kl or more, fees are calculated in increments of 30 ¥ per kl.
- (8) Electronic application via DC BEAM system.
- (9) Validity as long as original approval. Yearly renewal required.
- (11) Combinations with VW 505.01: Rebrand, reblend and renewal are possible but no new approval.
- (12) VAG France publishes a list.
- (13) Application must include Appendix F and IR run in a approved laboratory which will send a 100 ml sample to MTU upon applicant request.
- (14) First generation dexos1TM licences will expire on August 31, 2016. Second generation dexos1TM formulations will be accepted for review at the March 2015 dexos Approval Committee Meeting. Dexos2TM to be determined.
- (15) A blender is charged 3150 US \$ for the initial qualification fee and each formulation that a blender has registered is also charged a License Release Fee of 1000 US \$ per calendar year.
- (16) Customer to do the reblend and send bench test results.
- (17) Technical approval is valid for 6 years. A commercial renewal involving a 500 € fee is required every 2 years.
- (18) Original approvals (for additive companies) are valid 5 years after the oldest engine test. Reblend and rebrand approvals are valid 3 years from the day of the demand.
- (19) Approval provided in dexos eSubmission system.
- (20) Technical validity is for 3 years from the date of release of the active PSA specification. Commercial approval has to be renewed every year with payment of the appropriate fees.

**OEM
requirements
for
natural gas
engine oils**



Requirements for gas engine oils for busses and trucks

- 1 -



Specifications	Cummins		Mercedes-Benz 228.31 / 228.51	Detroit 93K216	Iveco	MAN M3271-1 / -3	Volvo	Scania
	CES 20074	CES 20085						
ACEA / API / OEM performance level	-	-	ACEA E9, API CJ-4 / ACEA E6	-	ACEA E6 (+2 TBN), ACEA B5 (light-duty only)	ACEA E6 + M 3477	ACEA E6 + VDS-3	Scania Low Ash
Viscosity grades (SAE J300)	10W-30, xW-40	10W-30, xW-40	Acc. ACEA	15W-40	Acc. ACEA	30, 40, 5W-x, 10W-x, 15W-x / 5W-x, 10W-x	xW-30, xW-40	10W-40
Laboratory Tests								
HTHS viscosity (CEC L-36-90, ASTM D4683), mPa.s, min.	3.5	3.5	3.5	4.2	Acc. ACEA	3.5	Report	3.5
Shear stability (CEC L-14-93, ASTM D6278, D7109)								
Viscosity at 100°C after 90 cycles shear (ASTM D445), mm ² /s, min.	-	-	Stay in grade	12.5	Stay in grade	xW-30: 9; xW-40: 12	xW-30: 9.3; xW-40: 12.5	Stay in grade
HTHS viscosity after 90 cycles shear (ASTM D4683), mPa.s, min.	-	-	-	3.9	-	-	xW-30: 3.4; xW-40: 3.7	-
Evaporative loss (Noack) (ASTM D5800), % loss, max.	13	13	13 / 12	15	13	13	13	13
Sulfated ash (ASTM D874), % m/m, max.	0.4 - 0.6	0.7 - 0.9	1.0	0.8	Acc. ACEA	1.0	1.0	1.0
Zinc (ASTM D5185), % m/m, min.	0.06 - 0.90	0.08 - 0.10	Rate & report	-	-	0.08 / Report	-	-
Phosphorus (ASTM D5185), % m/m, max.	0.06 - 0.085	0.07 - 0.09	0.12	-	Acc. ACEA	Report / 0.08	0.08	0.12
Calcium (ASTM D5185), % m/m	0.09 - 0.15	0.18 - 0.23	Rate & report	-	-	Report	-	-
Sulfur , % m/m, max.	0.4	0.4	0.4 / 0.3				0.3	0.4
Infrared spectrum (CES 6005)	Rate & report	Rate & report	Rate & report				-	-
TBN (ASTM D2896, D4739), mg KOH/g, min.	5.0	5.5	-	-	HD: 9, LD: 8	7	9	-
TAN (ASTM D664), mg KOH/g	0.5 - 1.5	0.5 - 1.5	-	-	-	-	-	-
Pour point (ASTM D97), °C, max.	-	-	-27	-25	-	5W-x: -40, 40: -15	Report	-

Requirements for gas engine oils for busses and trucks

- 2 -



Specifications	Cummins		Mercedes-Benz 228.31 / 228.51	Detroit 93K216	Iveco	MAN M3271-1 / -3	Volvo	Scania
	CES 20074	CES 20085						
Foaming tendency (ASTM D892) (No option A) Sequence I, II, III, ml, max.	-	-	10/0, 50/0, 10/0	10/0, 20/0, 10/0	10/0, 50/0, 10/0	10/0, 50/0, 10/0	10/0, 20/0, 10/0	10/0, 50/0, 10/0
Corrosion tendency (CBT / HTCBT) (ASTM D5968 / D6594)	D5968	D5968	mod. D6594	D6594	D6594	D6594	D6594	D6594
Copper increase - without / with 10% m/m B100, ppm, max.	20 / -	20 / -	20 / 200	20 / -	Report	Report	20	Report
Lead increase, ppm, max.	120	120	100	120	Report	Report	120	Report
Tin increase, ppm, max.	50	50	-	50	Report	Report	-	Report
Copper strip rating - with / without 10% m/m B100 (ASTM D130), max.	3 / -	3 / -	3 / 4a	3 / -	-	-	3	-
Thin Film Oxygen Uptake Test (TFOUT) (ASTM D4742), min, min.	-	-	-	X-(0.22(X+5)) ⁽¹⁾	-	-	-	-
Engine Tests								
Dynamometer tests	Currently Cummins is working on qualification testing for this specification. Once testing is determined these test(s) will be added to this specification.		See document Mercedes-Benz specifications for service fill engine oils V2016.1	1000 h standard lab. test in a DDC Series 50G Model MK engine	Acc. ACEA	Acc. ACEA	Acc. ACEA E6 + VDS-3	Acc. ACEA E6, E9, API CJ-4
Field tests	Minimum of 5 of each ISL-G and ISX-12G series engines. Minimum duration 1 year.		-	6 engines for 1 year or 60,000 miles	-	M 3271-3: Field test monitored by EMRA department	-	Scania Low Ash

Notes:

(1) Where X = Engine Tested Oil TFOUT

Unit conversion



Unit conversion tables

Temperature conversion



To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C
-144.4	-98	-72.2	96.8	36	2.22	249.8	121	49.44	402.8	206	96.67	683.6	362	183.33
-140.8	-96	-71.1	98.6	37	2.78	251.6	122	50.00	404.6	207	97.22	687.2	364	184.44
-137.2	-94	-70.0	100.4	38	3.33	253.4	123	50.56	406.4	208	97.78	690.8	366	185.56
-133.6	-92	-68.9	102.2	39	3.89	255.2	124	51.11	408.2	209	98.33	694.4	368	186.67
-130.0	-90	-67.8	104.0	40	4.44	257.0	125	51.57	410.0	210	98.89	698.0	370	187.78
-126.4	-88	-66.7	105.8	41	5.00	258.8	126	52.22	411.8	211	99.44	701.6	372	188.89
-122.8	-86	-65.6	107.6	42	5.56	260.6	127	52.78	413.6	212	100.00	705.2	374	190.00
-119.2	-84	-64.4	109.4	43	6.11	262.4	128	53.33	415.4	213	100.56	708.8	376	191.11
-115.6	-82	-63.3	111.2	44	6.67	264.2	129	53.89	417.2	214	101.11	712.4	378	192.22
-112.0	-80	-62.2	113.0	45	7.22	266.0	130	54.44	419.0	215	101.67	716.0	380	193.33
-108.4	-78	-61.1	114.8	46	7.78	267.8	131	55.00	420.8	216	102.22	719.6	382	194.44
-104.8	-76	-60.0	116.6	47	8.33	269.6	132	55.56	422.6	217	102.78	723.2	384	195.56
-101.2	-74	-58.9	118.4	48	8.89	271.4	133	56.11	424.4	218	103.33	726.8	386	196.67
-97.6	-72	-57.8	120.2	49	9.44	273.2	134	56.67	426.2	219	103.89	730.4	388	197.78
-94.0	-70	-56.7	122.0	50	10.00	275.0	135	57.22	428.0	220	104.44	734.0	390	198.89
-90.4	-68	-55.6	123.8	51	10.56	276.8	136	57.78	431.6	222	105.56	737.6	392	200.00
-86.8	-66	-54.4	125.6	52	11.11	278.6	137	58.33	435.2	224	106.67	741.2	394	201.11
-83.2	-64	-53.3	127.4	53	11.67	280.4	138	58.89	438.8	226	107.78	744.8	396	202.22
-79.6	-62	-52.2	129.2	54	12.22	282.2	139	59.44	442.4	228	108.89	748.4	398	203.33
-76.0	-60	-51.1	131.0	55	12.78	284.0	140	60.00	446.0	230	110.00	752.0	400	204.44
-72.4	-58	-50.0	132.8	56	13.33	285.8	141	60.56	449.6	232	111.11	755.6	402	205.56
-68.8	-56	-48.9	134.6	57	13.89	287.6	142	61.11	453.2	234	112.22	759.2	404	206.67
-65.2	-54	-47.8	136.4	58	14.44	289.4	143	61.67	456.8	236	113.33	762.8	406	207.78
-61.6	-52	-46.7	138.2	59	15.00	291.2	144	62.22	460.4	238	114.44	766.4	408	208.89
-58.0	-50	-45.6	140.0	60	15.56	293.0	145	62.78	464.0	240	115.56	770.0	410	210.00
-54.4	-48	-44.4	141.8	61	16.11	294.8	146	63.33	467.6	242	116.67	773.6	412	211.11
-50.8	-46	-43.3	143.6	62	16.67	296.6	147	63.89	471.2	244	117.78	777.2	414	212.22
-47.2	-44	-42.2	145.4	63	17.22	298.4	148	64.44	474.8	246	118.89	780.8	416	213.33
-43.6	-42	-41.1	147.2	64	17.78	300.2	149	65.00	478.4	248	120.00	784.4	418	214.44
-40.0	-40	-40.0	149.0	65	18.33	302.0	150	65.56	482.0	250	121.11	788.0	420	215.56
-36.4	-38	-38.9	150.8	66	18.89	303.8	151	66.11	485.6	252	122.22	791.6	422	216.67

Unit conversion tables

Temperature conversion



To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C
-32.8	-36	-37.8	152.6	67	19.44	305.6	152	66.67	489.2	254	123.33	795.2	424	217.78
-29.2	-34	-36.7	154.4	68	20.00	307.4	153	67.22	492.8	256	124.44	798.8	426	218.89
-25.6	-32	-35.6	156.2	69	20.56	309.2	154	67.78	496.4	258	125.56	802.4	428	220.00
-22.0	-30	-34.4	158.0	70	21.11	311.0	155	68.33	500.0	260	126.67	806.0	430	221.11
-18.4	-28	-33.3	159.8	71	21.67	312.8	156	68.89	503.6	262	127.78	809.6	432	222.22
-14.8	-26	-32.2	161.6	72	22.22	314.6	157	69.44	507.2	264	128.89	813.2	434	223.33
-11.2	-24	-31.1	163.4	73	22.78	316.4	158	70.00	510.8	266	130.00	816.8	436	224.44
-7.6	-22	-30.0	165.2	74	23.33	318.2	159	70.56	514.4	268	131.11	820.4	438	225.56
-4.0	-20	-28.9	167.0	75	23.89	320.0	160	71.11	518.0	270	132.22	824.0	440	226.67
-0.4	-18	-27.78	168.8	76	24.44	321.8	161	71.67	521.6	272	133.33	827.6	442	227.78
3.2	-16	-26.67	170.6	77	25.00	323.6	162	72.22	525.2	274	134.44	831.2	444	228.89
6.8	-14	-25.56	172.4	78	25.56	325.4	163	72.78	528.8	276	135.56	834.8	446	230.00
10.4	-12	-24.44	174.2	79	26.11	327.2	164	73.33	532.4	278	136.67	838.4	448	231.11
14.0	-10	-23.33	176.0	80	26.67	329.0	165	73.89	536.0	280	137.78	842.0	450	232.22
17.6	-8	-22.22	177.8	81	27.22	330.8	166	74.44	539.6	282	138.89	845.6	452	233.33
21.2	-6	-21.11	179.6	82	27.78	332.6	167	75.00	543.2	284	140.00	849.2	454	234.44
24.8	-4	-20.00	181.4	83	28.33	334.4	168	75.56	546.8	286	141.11	852.8	456	235.56
28.4	-2	-18.89	183.2	84	28.89	336.2	169	76.11	550.4	288	142.22	856.4	458	236.67
32.0	0	-17.78	185.0	85	29.44	338.0	170	76.67	554.0	290	143.33	860.0	460	237.78
33.8	1	-17.22	186.8	86	30.00	339.8	171	77.22	557.6	292	144.44	863.6	462	238.89
35.6	2	-16.67	188.6	87	30.56	341.6	172	77.78	561.2	294	145.56	867.2	464	240.00
37.4	3	-16.11	190.4	88	31.11	343.4	173	78.33	564.8	296	146.67	870.8	466	241.11
39.2	4	-15.56	192.2	89	31.67	345.2	174	78.89	568.4	298	147.78	874.4	468	242.22
41.0	5	-15.00	194.0	90	32.22	347.0	175	79.44	572.0	300	148.89	878.0	470	243.33
42.8	6	-14.44	195.8	91	32.78	348.8	176	80.00	575.6	302	150.00	881.6	472	244.44
44.6	7	-13.89	197.6	92	33.33	350.6	177	80.56	579.2	304	151.11	885.2	474	245.56
46.4	8	-13.33	199.4	93	33.89	352.4	178	81.11	582.8	306	152.22	888.8	476	246.67
48.2	9	-12.78	201.2	94	34.44	354.2	179	81.67	586.4	308	153.33	892.4	478	247.78
50.0	10	-12.22	203.0	95	35.00	356.0	180	82.22	590.0	310	154.44	896.0	480	248.89
51.8	11	-11.67	204.8	96	35.56	357.8	181	82.78	593.6	312	155.56	899.6	482	250.00
53.6	12	-11.11	206.6	97	36.11	359.6	182	83.33	597.2	314	156.67	903.2	484	251.11

Unit conversion tables

Temperature conversion

To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C	To °F	From °T	To °C
56.4	13	-10.58	208.4	98	36.67	361.4	183	83.89	600.8	316	157.78	906.8	486	252.22
57.2	14	-10.00	210.2	99	37.22	363.2	184	84.44	604.4	318	158.89	910.4	488	253.33
59.0	15	-9.44	212.0	100	37.78	365.0	185	85.00	608.0	320	160.00	914.0	490	254.44
60.8	16	-8.89	213.8	101	38.33	366.8	186	85.56	611.6	322	161.11	917.6	492	255.56
62.6	17	-8.33	215.6	102	38.89	368.6	187	86.11	615.2	324	162.22	921.2	494	256.67
64.4	18	-7.78	217.4	103	39.44	370.4	188	86.67	618.8	326	163.33	924.8	496	257.78
66.2	19	-7.22	219.2	104	40.00	372.2	189	87.22	622.4	328	164.44	928.4	498	258.89
68.0	20	-6.67	221.0	105	40.56	374.0	190	87.78	626.0	330	165.56	932.0	500	260.00
69.8	21	-6.11	222.8	106	41.11	375.8	191	88.33	629.6	332	166.67	Interpolation 1.8 1 0.56 °T Figures are readings in either °F or °C. Equivalent to 273.15 K (kelvin)		
71.6	22	-5.56	224.6	107	41.67	377.6	192	88.89	633.2	334	167.78			
73.4	23	-5.00	226.4	108	42.22	379.4	193	89.44	636.8	336	168.89			
75.2	24	-4.44	228.2	109	42.78	381.2	194	90.00	640.4	338	170.00			
77.0	25	-3.89	230.0	110	43.33	383.0	195	90.56	644.0	340	171.11			
78.8	26	-3.33	231.8	111	43.89	384.8	196	91.11	647.6	342	172.22			
80.6	27	-2.78	233.6	112	44.44	386.3	197	91.67	651.2	344	173.33			
82.4	28	-2.22	235.4	113	45.00	388.4	198	92.22	654.8	346	174.44			
84.2	29	-1.67	237.2	114	45.56	390.2	199	92.78	658.4	348	175.56			
86.0	30	-1.11	239.0	115	46.11	392.0	200	93.33	662.0	350	176.67			
87.8	31	-0.50	240.8	116	46.67	393.8	201	93.89	665.6	352	177.78	Equivalent to 273.15 K (kelvin)		
89.6	32	0.00	242.6	117	47.22	395.6	202	94.44	669.2	354	178.89			
91.4	33	0.56	244.4	118	47.78	397.4	203	95.00	672.8	356	180.00			
93.2	34	1.11	246.2	119	48.33	399.2	204	95.56	676.4	358	181.11			
95.0	35	1.67	248.0	120	48.89	401.0	205	96.11	680.0	360	182.22			

Unit conversion tables

Measurement conversion from US to SI units - 1 -

Customary Unit	x Factor =	SI Unit	Customary Unit	x Factor =	SI Unit
Area		square meter, m²	Flow		meter³ or kilogram
square foot, ft ²	9.2903	square decimeter, dm ²			second, m ³ or kg/s
square inch, in ²	6.4516	square centimeter, cm ²	foot ³ /minute, ft ³ /min	0.47195	decimeter ³ /second, dm ³ /s
square US statute mile, mi ²	2.59	square kilometer, km ²	Imp gallon/hour, gal/h	1.2628	centimeter ³ /second, cm ³ /s
square yard, yd ²	0.83613	square meter, m ²	US gallon/hour, gal/h	1.0515	centimeter ³ /second, cm ³ /s
			pound-mass/minute, lbm/min	7.5599	gram/second, g/s
			short ton/hour, st/h	0.252	kilogram/second, kg/s
Density		kilogram/meter³, kg/m³			
gram/centimeter ³ , g/cm ³	1000	kilogram/meter ³ , kg/m ³	Force		newton, N (kg•m/s²)
ounce-mass/inch ³ ozm/in ³	1.73	megagram/meter ³ , Mg/m ³	dyne	10	micronewton, µN
pound-mass/foot ³ , lbm/ft ³	16.018	kilogram/meter ³ , kg/m ³	kilogram-force, kgf	9.80665	newton, N
pound-mass/Imp gallon, lbm/gal	99.776	kilogram/meter ³ , kg/m ³	avdp pound-force, lbf	4.44822	newton, N
pound-mass/US gallon, lbm/gal	119.83	kilogram/meter ³ , kg/m ³	poundal, pdl	0.13826	newton, N
long ton/yard ³ , lHyd ³	1.3289	megagram/meter ³ , Mg/m ³			
Energy or Work		joule, J (N•m, kg•m²/s²)	Length		meter, m
British thermal unit, Btu (Int. Table)	1.05506	kilojoule, kJ	angstrom, Å	100	picometer, pm
calorie, cal (Int. Table)	4.1868	joule, J	foot, ft	0.3048	meter, m
foot-pound-force, ft•lbf	1.35582	joule, J	inch, in	25.4	millimeter, mm
horsepower-hour, hp•h	2.6856	megajoule, MJ	micron, µ	1	micrometer, µm
meter kilogram-force, m•kgf	9.80665	joule, J	Int, nautical mile, naut mi (6076.1 ft)	1.852	kilometer, km
watt-hour, W•h	3.6	kilojoule, kJ	US statute mile, mi (5280 ft)	1.6093	kilometer, km
			yard, yd	0.9144	meter, m

Unit conversion tables

Measurement conversion from US to SI units - 2 -

Customary Unit	x Factor =	SI Unit	Customary Unit	x Factor =	SI Unit
Mass		kilogram, kg	Viscosity dynamic		pascal-second, Pa.s
avdp ounce-mass, ozm	28.3495	gram, g	kinematic		meter ² /second, m ² /s
avdp pound-mass, lbm	0.45359	kilogram, kg	centipoises, cP	1.0	millipascal-second, mPa.s
long ton, lt (2240 lbm)	1.01605	megagram, Mg	centistokes, cSt	1.0	millimeter ² /second, mm ² /s
metric ton (tonne), mt (2204.6 lbm)	1000.0	kilogram, kg			
short ton, st (2000 lbm)	907.2	kilogram, kg	Volume		cubic meter, m³
Power		watt, W (J/s, kg.m²/s)	barrel (oil), bbl (42 US gal, 35 Imp gal)	0.15899	cubic meter, m ³
Btu (Int. Table)/hour, Btu/h	0.29307	watt, W	cubic foot, ft ³ (1728 in ³)	28.317	cubic decimeter, dm ³
kilo calorie(Int. Table)/hour, kcal/h	1.1639	watt, W	Imp gallon, gal (160 Imp oz, 0.16054 ft ³)	4.5461	liter, l
foot-pound-force/second, ft.lbf/s	1.35582	watt, W	US gallon, gal (128 US oz, 0.13368 ft ³)	3.7854	liter, l
horsepower, hp (550ft.lbf/s)	745.7	watt, W	cubic inch, in ³	16.387	cubic centimeter, cm ³
metric horsepower, mhp, PS or CV	735.5	watt, W	liter, L	1.0	cubic decimeter, dm ³
Pressure or Stress		pascal, Pa (N/m², kg/m.s²)	US fluid ounce, fl oz	29.574	cubic centimeter, cm ³
normal atmosphere, atm (760 torr)	101.325	kilopascal, kPa	US liquid pint, liq pt (16 fl oz)	0.47318	liter, l
bar, b	100.0000	kilopascal, kPa	US liquid quart, liq qt (32 fl oz)	0.94635	liter, l
dyne/centimeter ² , dyne/cm ²	0.1	pascal, Pa	cubic yard, yd ³	0.76455	cubic meter, m ³
inch of water @ 39.2°F (4°C)	249.08	pascal, Pa			
kilogram-force/centimeter ² , kgf/cm ²	98.0665	kilopascal, kPa			
millimeter of Hg @ 0°C (32°F), torr	133.322	pascal, Pa			
pound-force/inch ² , psi	6.89476	kilopascal, kPa			
long ton/inch ² , lt/in ²	15.4443	megapascal, MPa			

Unit conversion tables



Decimal inches to millimeters

in	mm	in	mm	in	mm
.01	.254	.36	9.144	.71	18.034
.02	.508	.37	9.398	.72	18.288
.03	.762	.38	9.652	.73	18.542
.04	1.016	.39	9.906	.74	18.796
.05	1.270	.40	10.160	.75	19.050
.06	1.524	.41	10.414	.76	19.304
.07	1.778	.42	10.668	.77	19.558
.08	2.032	.43	10.922	.78	19.812
.09	2.286	.44	11.176	.79	20.066
.10	2.540	.45	11.430	.80	20.320
.11	2.794	.46	11.684	.81	20.574
.12	3.048	.47	11.938	.82	20.828
.13	3.302	.48	12.192	.83	21.082
.14	3.556	.49	12.446	.84	21.336
.15	3.810	.50	12.700	.85	21.590
.16	4.064	.51	12.954	.86	21.844
.17	4.318	.52	13.208	.87	22.098
.18	4.572	.53	13.462	.88	22.352
.19	4.826	.54	13.716	.89	22.606
.20	5.080	.55	13.970	.90	22.860
.21	5.334	.56	14.224	.91	23.114
.22	5.588	.57	14.478	.92	23.368
.23	5.842	.58	14.732	.93	23.622
.24	6.096	.59	14.986	.94	23.876
.25	6.350	.60	15.240	.95	24.130
.26	6.604	.61	15.494	.96	24.384
.27	6.858	.62	15.748	.97	24.638
.28	7.112	.63	16.002	.98	24.892
.29	7.366	.64	16.256	.99	25.146
.30	7.620	.65	16.510	1.00	25.400
.31	7.874	.66	16.764		
.32	8.128	.67	17.018		
.33	8.382	.68	17.272		
.34	8.638	.69	17.526		
.35	8.890	.70	17.780		

Millimeters to inches

mm	in	mm	in	mm	in
1	0.0394	36	1.4173	71	2.7953
2	0.0787	37	1.4567	72	2.8346
3	0.1181	38	1.4961	73	2.8740
4	0.1575	39	1.5354	74	2.9134
5	0.1968	40	1.5748	75	2.9528
6	0.2362	41	1.6142	76	2.9921
7	0.2756	42	1.6535	77	3.0315
8	0.3150	43	1.6929	78	3.0709
9	0.3543	44	1.7323	79	3.1102
10	0.3937	45	1.7716	80	3.1496
11	0.4331	46	1.8110	81	3.1890
12	0.4724	47	1.8504	82	3.2283
13	0.5118	48	1.8898	83	3.2677
14	0.5512	49	1.9291	84	3.3071
15	0.5906	50	1.9685	85	3.3465
16	0.6299	51	2.0079	86	3.3858
17	0.6693	52	2.0472	87	3.4252
18	0.7087	53	2.0866	88	3.4646
19	0.7480	54	2.1260	89	3.5039
20	0.7874	55	2.1654	90	3.5433
21	0.8268	56	2.2047	91	3.5827
22	0.8661	57	2.2441	92	3.6220
23	0.9055	58	2.2835	93	3.6614
24	0.9449	59	2.3228	94	3.7008
25	0.9842	60	2.3622	95	3.7402
26	1.0236	61	2.4016	96	3.7795
27	1.0630	62	2.4409	97	3.8189
28	1.1024	63	2.4803	98	3.8583
29	1.1417	64	2.5197	99	3.8976
30	1.1811	65	2.5591	100	3.9370
31	1.2205	66	2.5984		
32	1.2596	67	2.6378		
33	1.2992	68	2.6772		
34	1.3386	69	2.7165		
35	1.3780	70	2.7559		


Acronym table

AAM	Alliance of Automobile Manufacturers	ECTC	Engine Coolant Technical Committee of CEC
ACC	American Chemistry Council	ECU	Electronic Control Unit (Gasoline + Diesel)
ACEA	Association des Constructeurs Européens d'Automobiles	EDC	Electronic Diesel Control
ACM	Acrylic Copolymer Material (Seal - Monomer is Ethylene Acrylate)	EELQMS	European Engine Lubricant Quality Management System
AFNOR	Association Française de Normalisation	EFTC	Engine Fuel Technical Committee of CEC
API	American Petroleum Institute	EGR	Exhaust Gas Recirculation
ASTM	American Society for Testing Materials, USA	ELTC	Engine Lubricant Technical Committee of CEC
ATC	Technical Committee of Petroleum Additive Manufacturers in Europe (Additives Technical Committee)	EMA	Engine Manufacturers Association, USA
ATIEL	Association Technique de l'Industrie Européenne des Lubrifiants	EOAT	Engine Oil Aeration Test
BN	Base Number (TBN : Total Base Number)	EOLCS	Engine Oil Licensing and Certification System
BOI	Base Oil Interchangeability	EPA	Environmental Protection Agency
BTC	CEC British National Organisation (British Technical Committee)	EUDC	Extra Urban Driving Cycle
CCFA	Comité des Constructeurs Français d'Automobiles (France)	EUROPIA	European Petroleum Industry Association
CEC	Conseil Européen de Coordination	FAP	Filtre à Particules, Particulate Filter (= DPF)
CEN	Comité Européen de Normalisation	FSI	Fuel Stratified Injection
CCMC	Comité des Constructeurs d'Automobiles du Marché Commun	GDI	Gasoline Direct Injection
CEFIC	Conseil Européen des Fédérations de l'Industrie Chimique	GFC	CEC French National Organisation (Groupement Français de Coordination)
CIMAC	Congrès International des Machines à Combustion	GRPE	Group of Reporters on Pollution and Energy
CMA	Chemical Manufacturers Association, USA	HC	HydroCarbon
CONCAWE	Conservation of Clean Air and Water in Europe	HDI	High pressure Direct Injection (Diesel)
CoP	Code of Practice	HEUI	Hydraulically actuated and Electronically controlled Unit Injector
CRC	Coordination Research Council, USA	HPI	High Pressure Injection (Diesel)
CRT	Continuously Regenerating Trap	HTCBT	High Temperature Corrosion Bench Test (Cummins)
CUNA	CEC Italian National Organisation (Commissione tecnica di Unificazione neel' Autoveicolo)	HTHS	High Temperature High Shear (Viscosity)
DHD	Diesel Heavy Duty (Global DHD-1 specification)	IDI	Indirect Diesel Injection
DI	Direct Injection	ILMA	Independent Lubricant Manufacturer Association (USA)
DIN	Deutsches Institut für Normung	ILSAC	International Lubricant Standardization & Approval Committee
DKA	CEC German National Organisation (Deutscher Koordinierung Ausschuss)	IP	Institute of Petroleum, UK
DPF	Diesel Particulate Filter	ISO	International Organisation for Standardization
EAM	Ethylene Acrylic copolymer Material (Seal)	JAMA	Japan Automobile Manufacturers Association, Inc.
EAME	Europe Africa Middle-East	JASO	Japan Automobile Standards Organisation
		JIS	Japan Industry Standard
		JPI	Japan Petroleum Institute

Acronym table

JSAE	Society of Automotive Engineers, Japan	PDSC	Pressure Differential Scanning Calorimeter
LDF	Long Drain Field test (Scania)	RNT	Radio Nucleide (wear) Test
LEDL	Low Emission Diesel Lubricant	RWFT	Roller Follower Wear Test
LRI	Lubricant Review Institute, USA	SAAC	Statistical Application Advisory Committee of CEC
MTAC	Multiple Test Acceptance Criteria	SAE	Society of Automobile Engineers, USA
MVEG	Motor Vehicle Emission Group	SAPS	Sulfated Ash, Phosphorus and Sulfur
NBR	Nitrile Butadiene Rubber (seal)	TDI	Turbocharged Direct Injection
OEM	Original Equipement Manufacturers	TLTC	Transmission Lubricant Technical Committee of CEC
OHC	OverHead Camshaft	TRWL	Top Ring Weight Loss
OICA	Organisation Internationale des Constructeurs Automobiles (EU)	VDA	Verband der Automobilindustrie, Germany
OMEM	Other Major Engine Manufacturers	VDS	Volvo Drain Specification
PAJ	Petroleum Association of Japan	VTW	Valve Train Wear

ORONITE ADDS UP AROUND THE WORLD

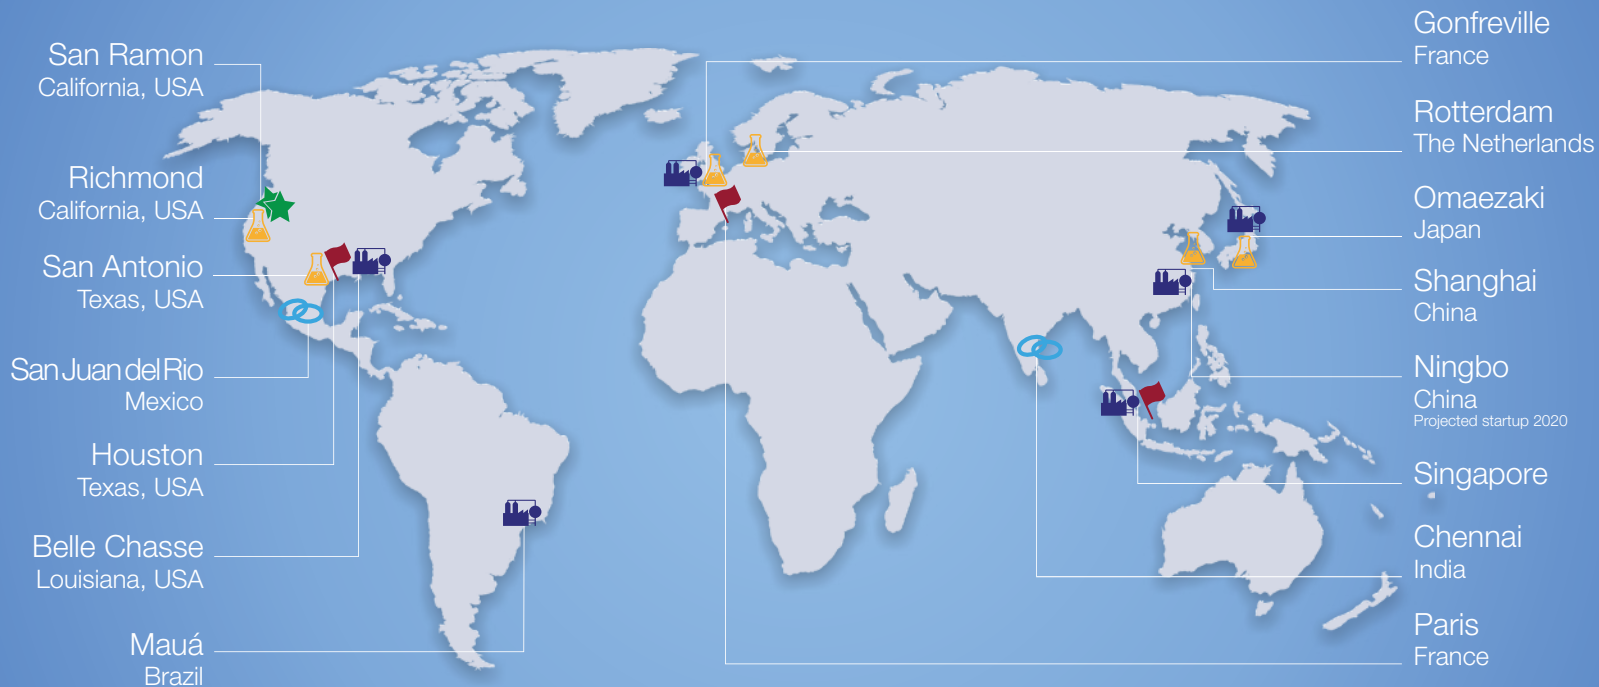



Oronite

WORLDWIDE HEADQUARTERS

Chevron Oronite Company LLC
6001 Bollinger Canyon Road
San Ramon, CA 94583-2324
USA
Phone: (1) 713-432-2500

REGIONAL HEADQUARTERS

American Region

Chevron Oronite Company LLC
3901 Briarpark Dr.
Houston, TX 77042
USA
Phone: 713-954-6060

Asia-Pacific Region

Chevron Oronite Pte. Ltd.
21 Sakra Road
Singapore, 627890
SINGAPORE
Phone: (65) 6867 6557

Europe, Africa, Middle East Region

Chevron Oronite SAS*
1, rue Eugène et Armand Peugeot
CSA 10022 - 92508 Rueil-Malmaison Cedex
FRANCE
Phone: (33) 1 46 39 36 00

**Registered office: Share capital € 18.407.665 - Nanterre Trade Register n° 562 061 630*

Oronite provides this publication for informational purposes only. This information is based on the available data and is believed to be accurate. No warranty of any kind is either expressed or implied. Oronite disclaims any liability incurred in connection with any use of this information beyond Oronite's control.

To learn more please visit our website www.oronite.com

© 2020 Chevron Oronite Company LLC. All rights reserved. Chevron, the Chevron hallmark, Oronite and Adding Up are registered trademarks of Chevron Intellectual Property LLC.

